
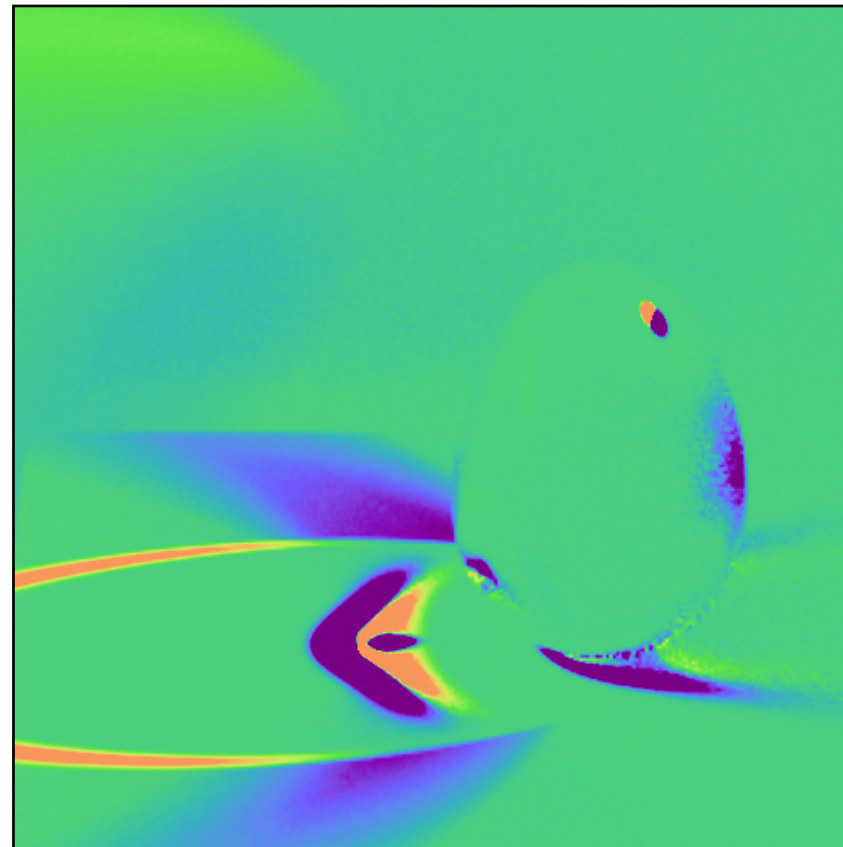


Inverse and differentiable rendering

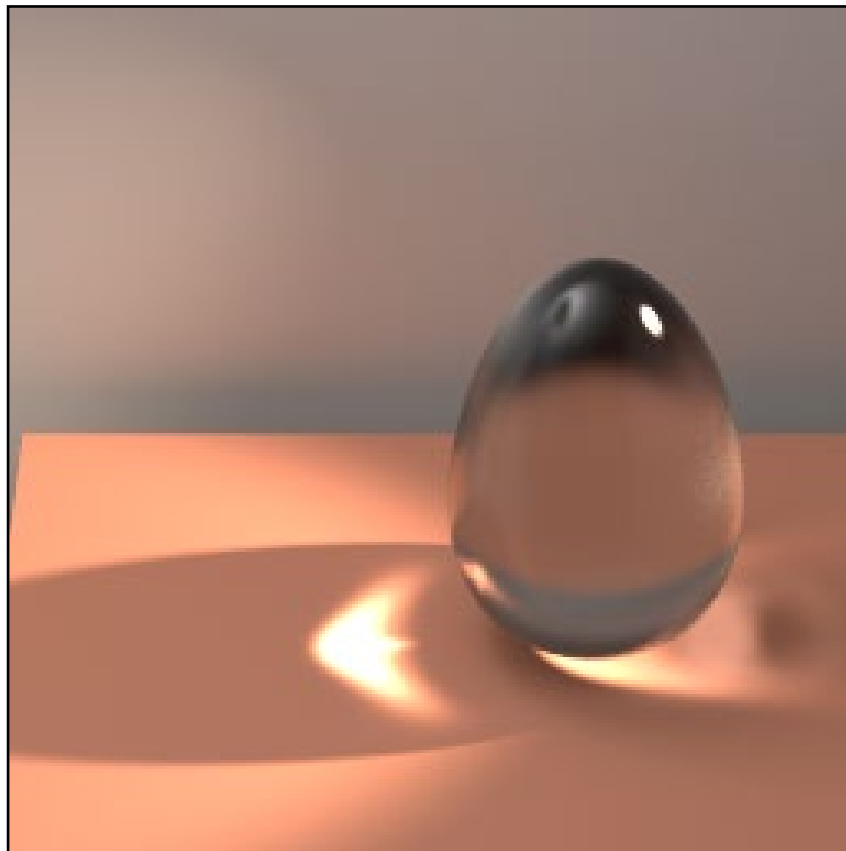

15-468, 15-668, 15-868
Physics-based Rendering
Spring 2024, Lecture 16

Course announcements

- Take-home quiz 10 posted, due 4/23, worth 100 points.
- Will try to have feedback for all proposals by Friday.

Overview of today's lecture


- Inverse rendering.
- Differentiable rendering.
- Differentiating local parameters.
- Differentiating global parameters.
- Path-space differentiable rendering.
- Reparameterizations.

Slide credits


Many of these slides were directly adapted from:

- Shuang Zhao (UC Irvine).
- Tzu-Mao Li (UCSD).
- Sai Praveen Bangaru (MIT).

Forward rendering

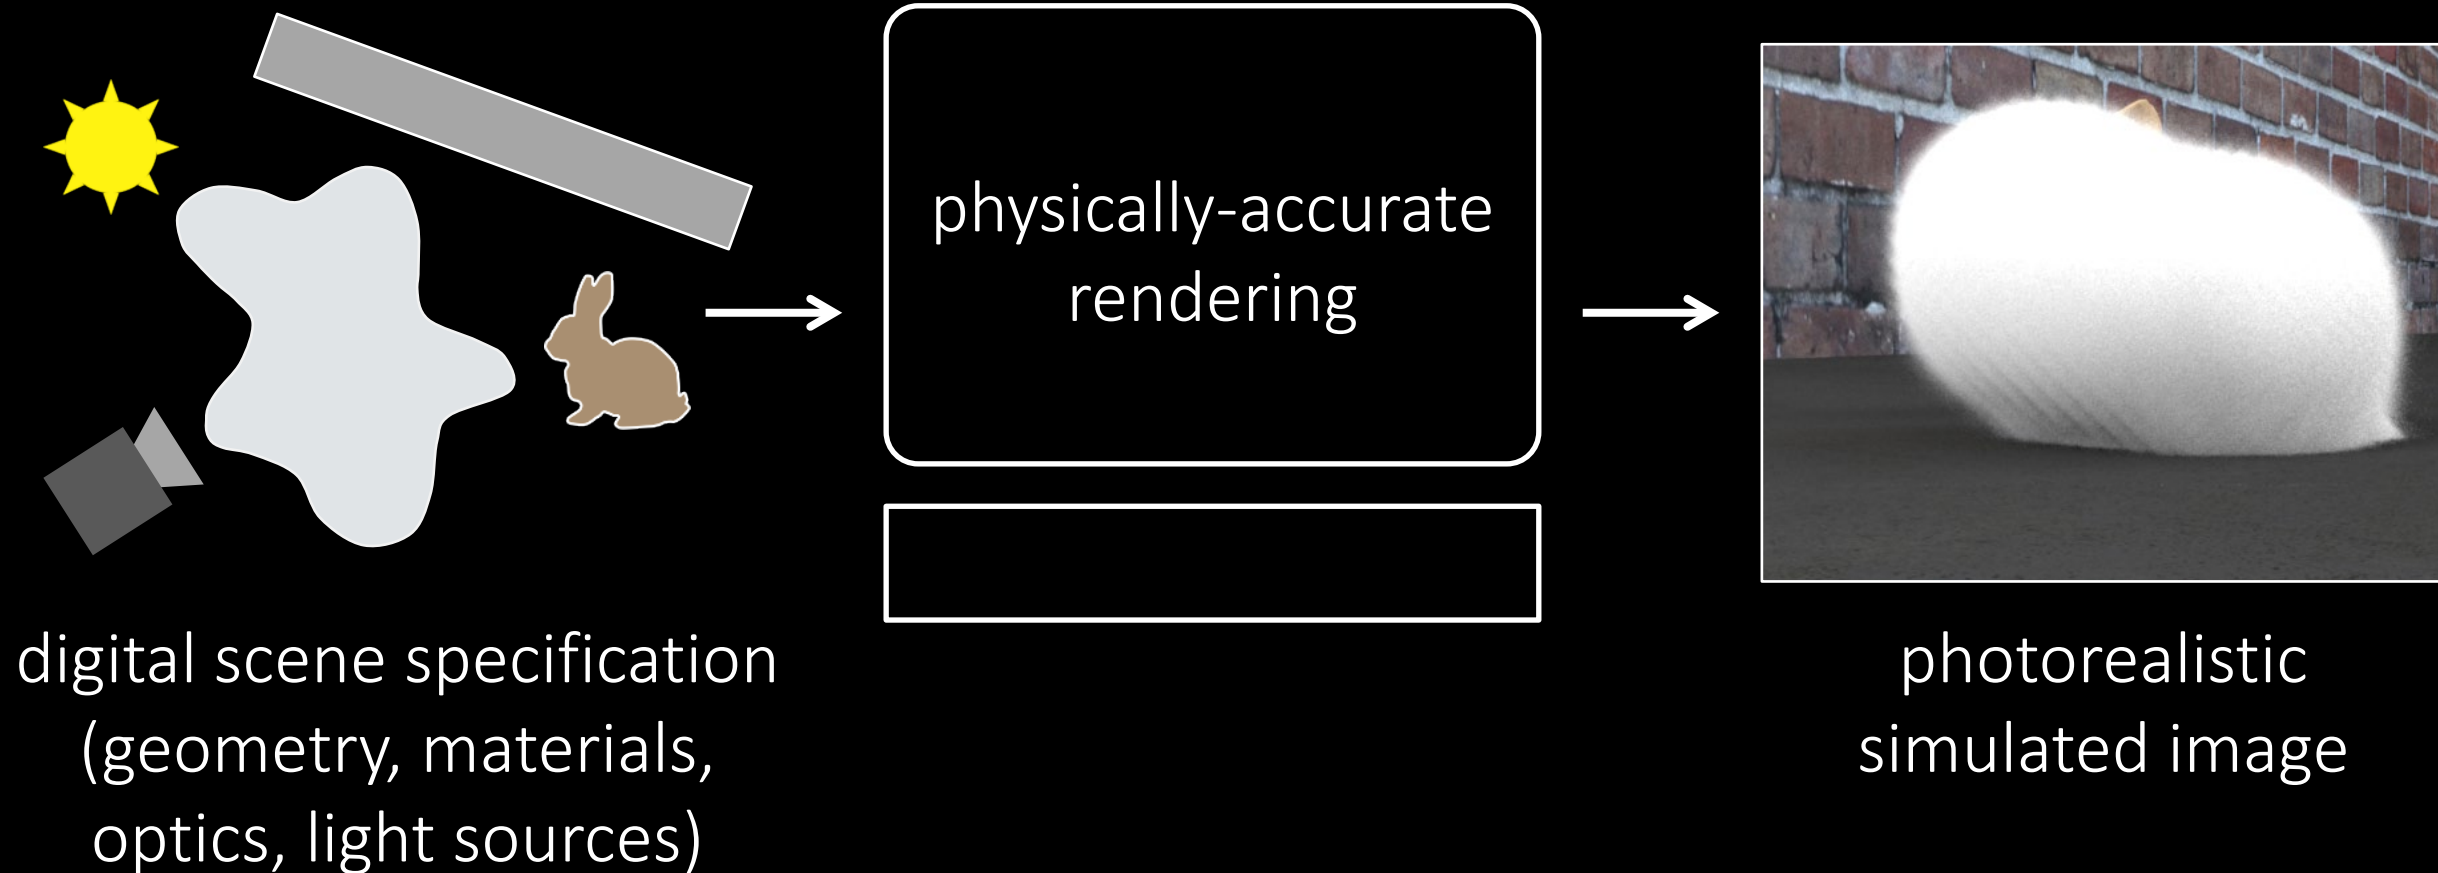

Inverse rendering

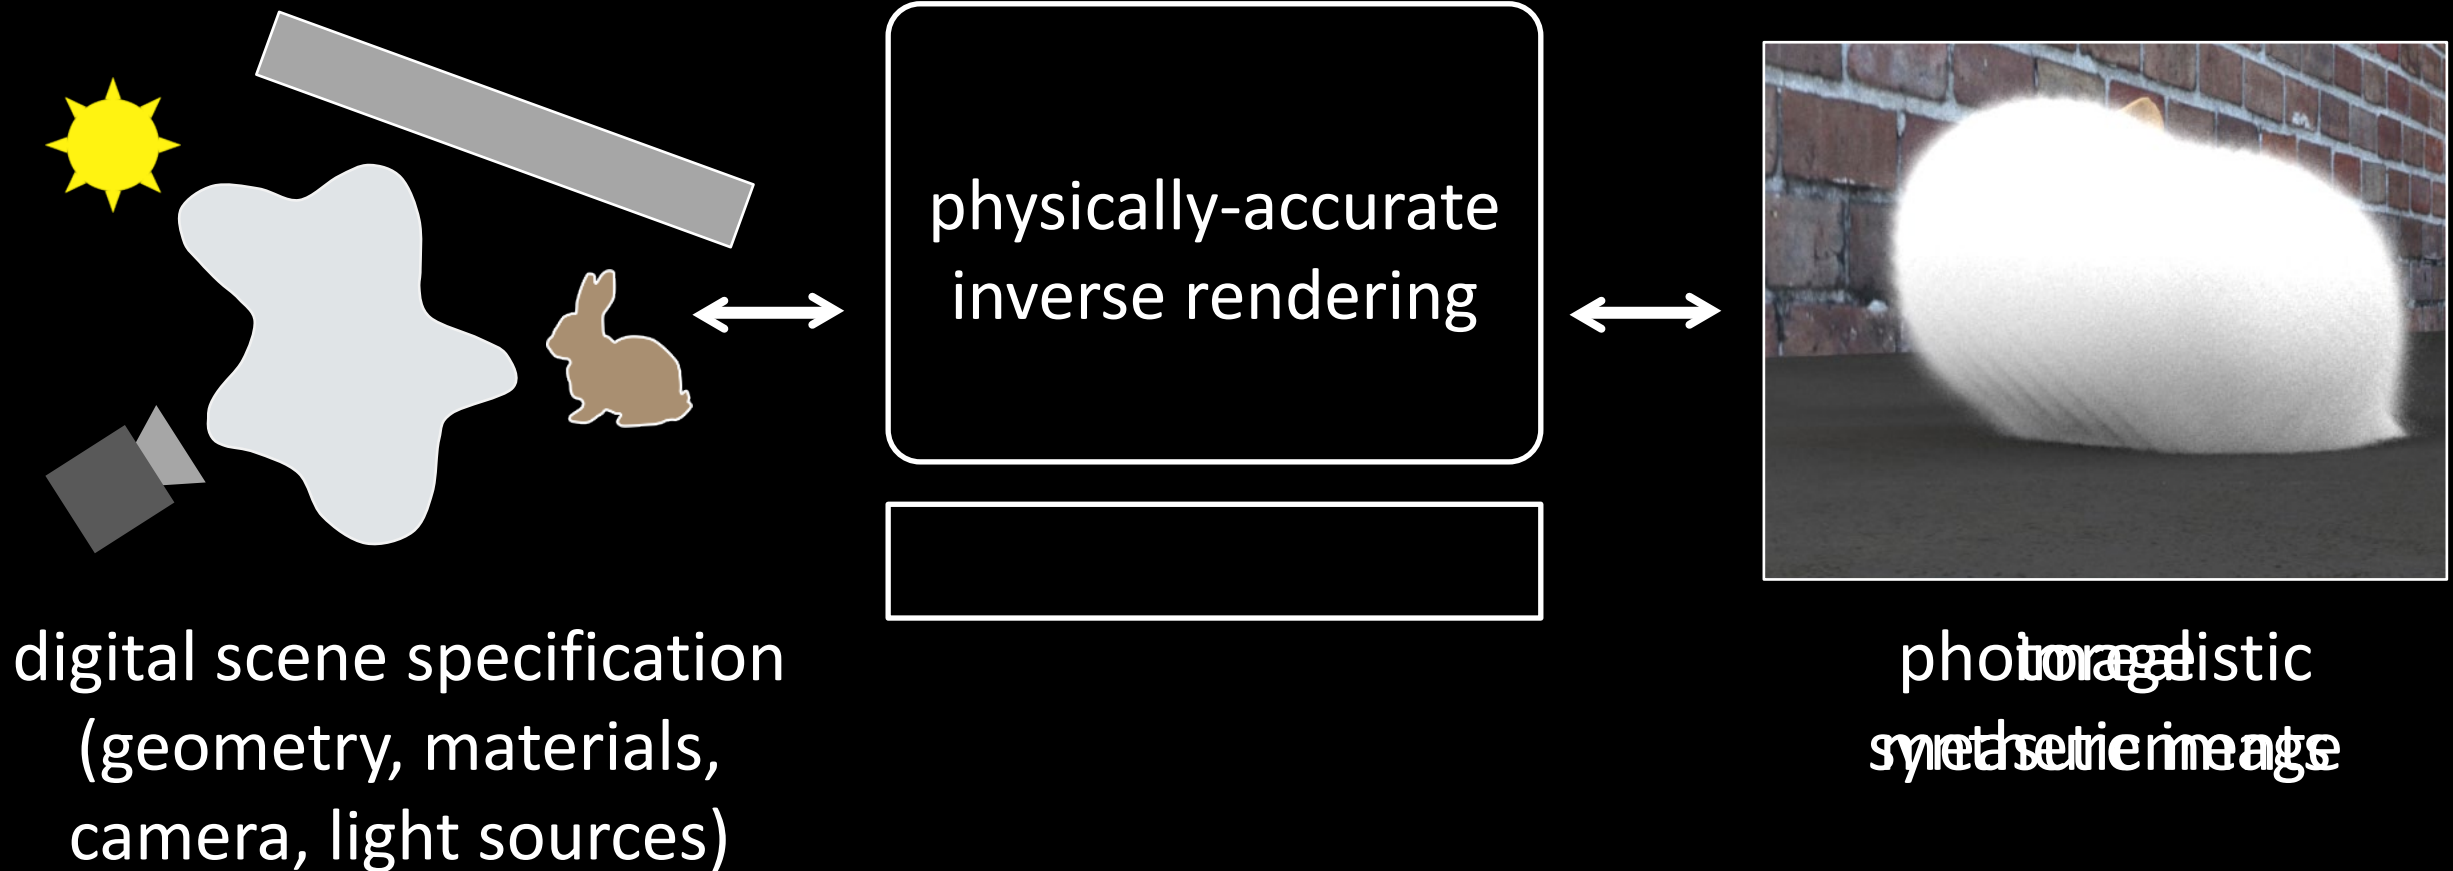

What I was doing in 2013



I wanted to make images such as this one

mixed soap



glycerine soap



olive oil





curacao







whole milk

Scattering: extremely multi-path transport

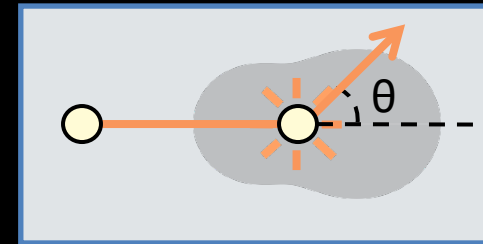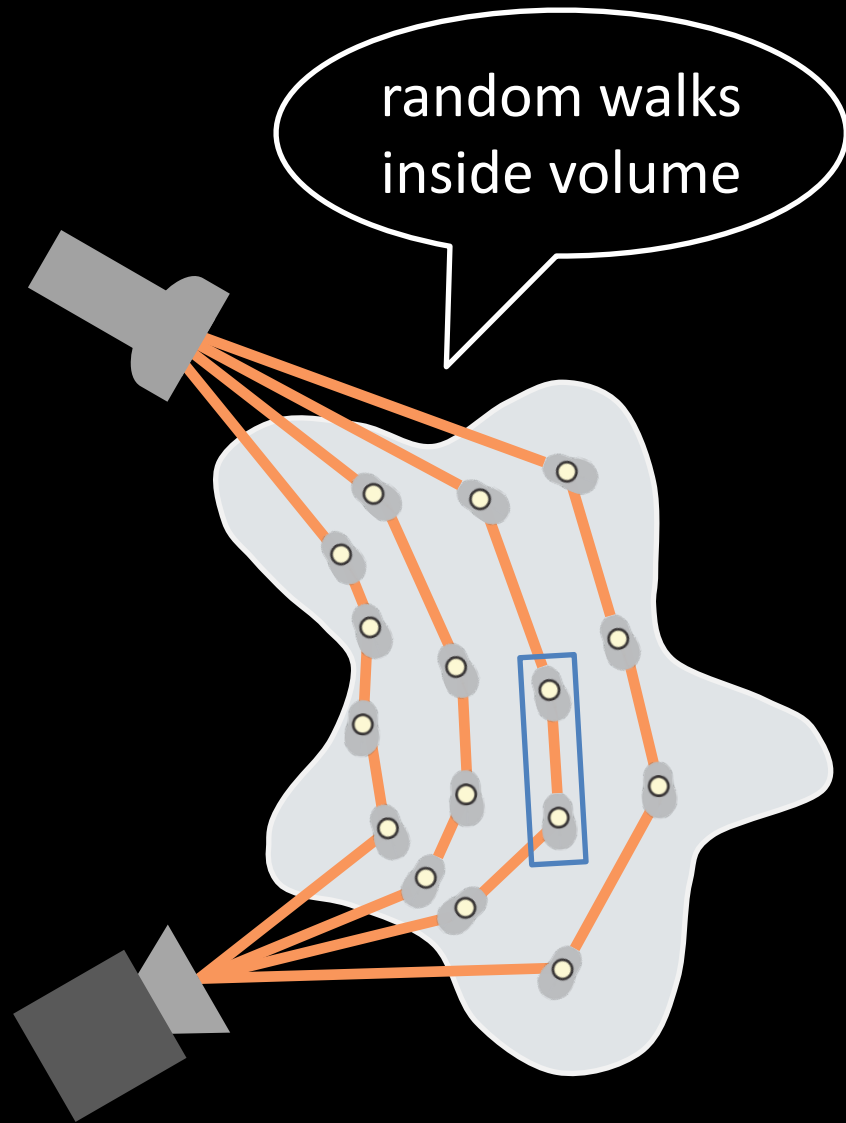

volumetric density σ_t
scattering albedo a
phase function f_r


Acquisition setup

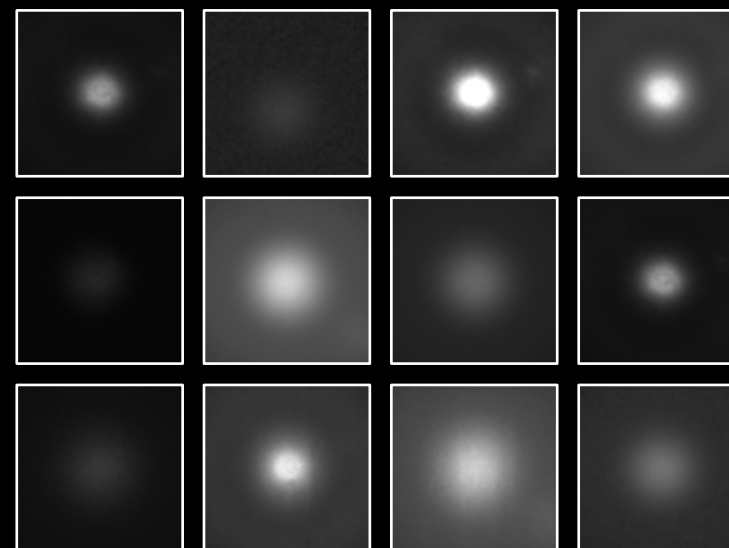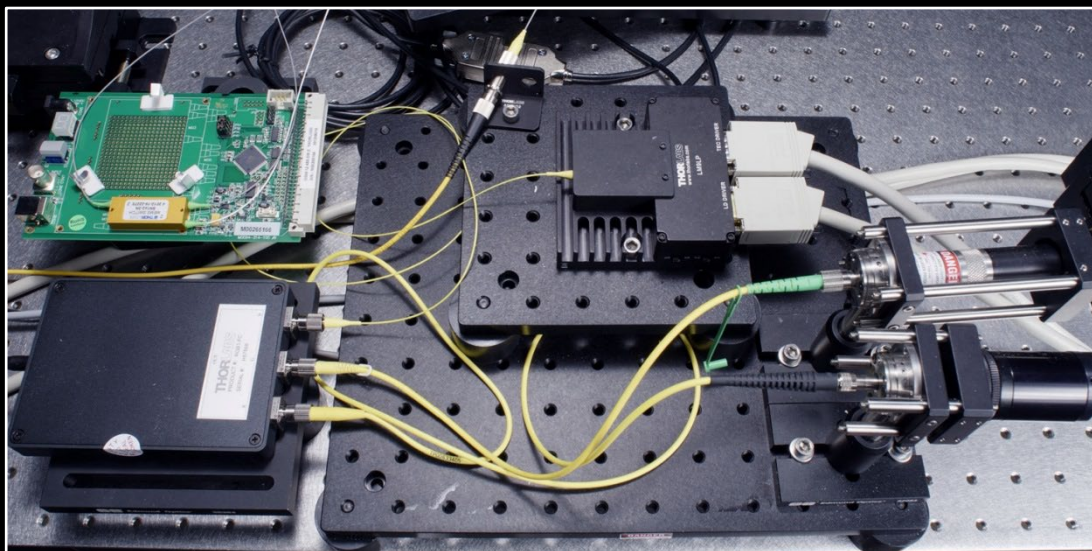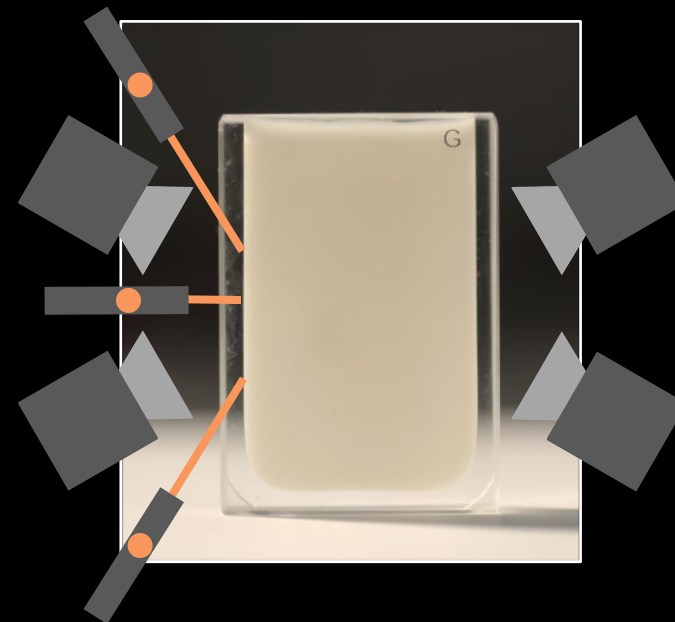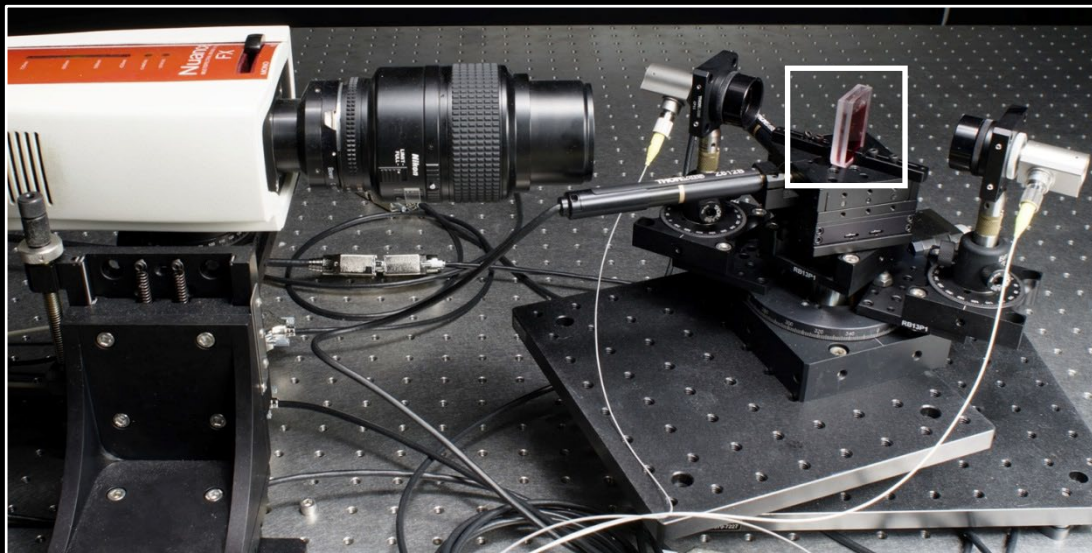

Analysis by synthesis (a.k.a. inverse rendering)


not scalable

solve by
~~exhaustive search?~~

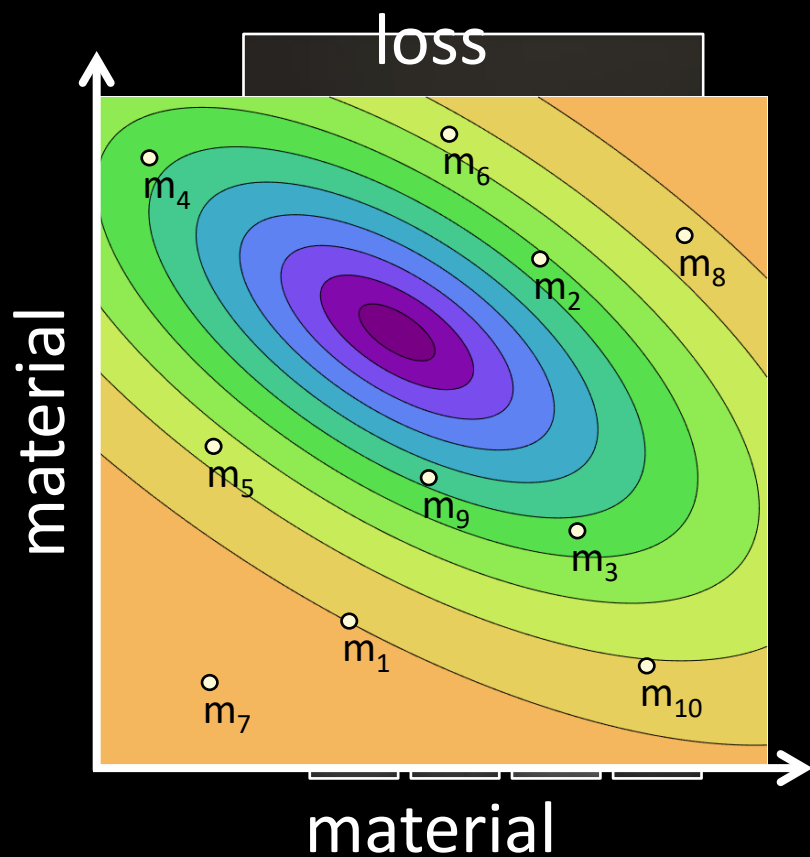


optimization problem

$$\min_m \left\| \text{stack of images} - \text{render}(m) \right\|^2$$

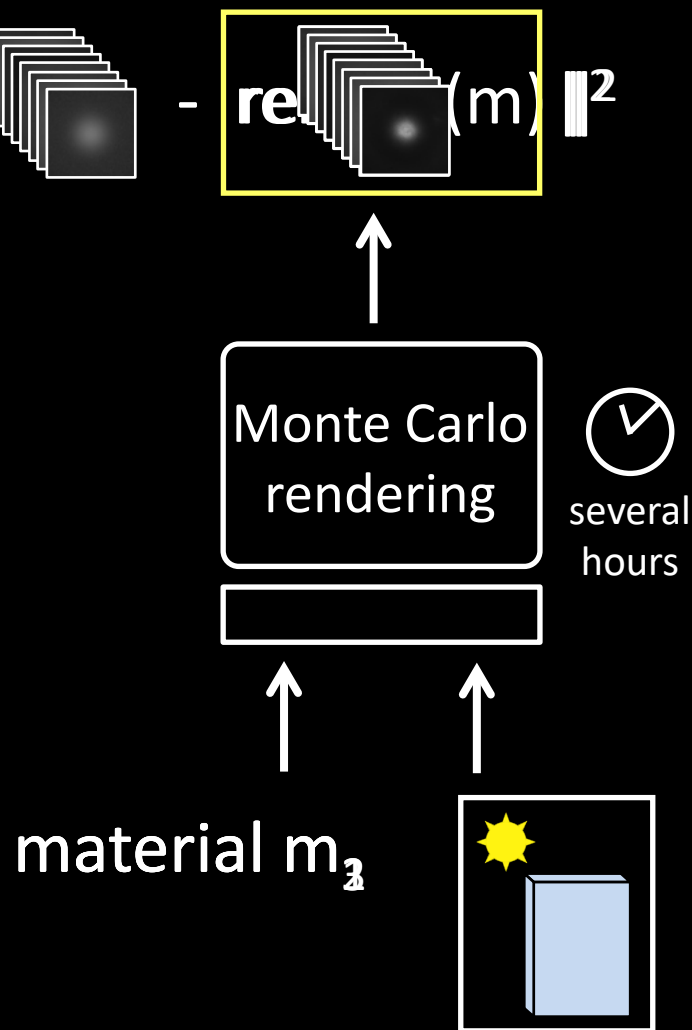

Analysis by synthesis (a.k.a. inverse rendering)

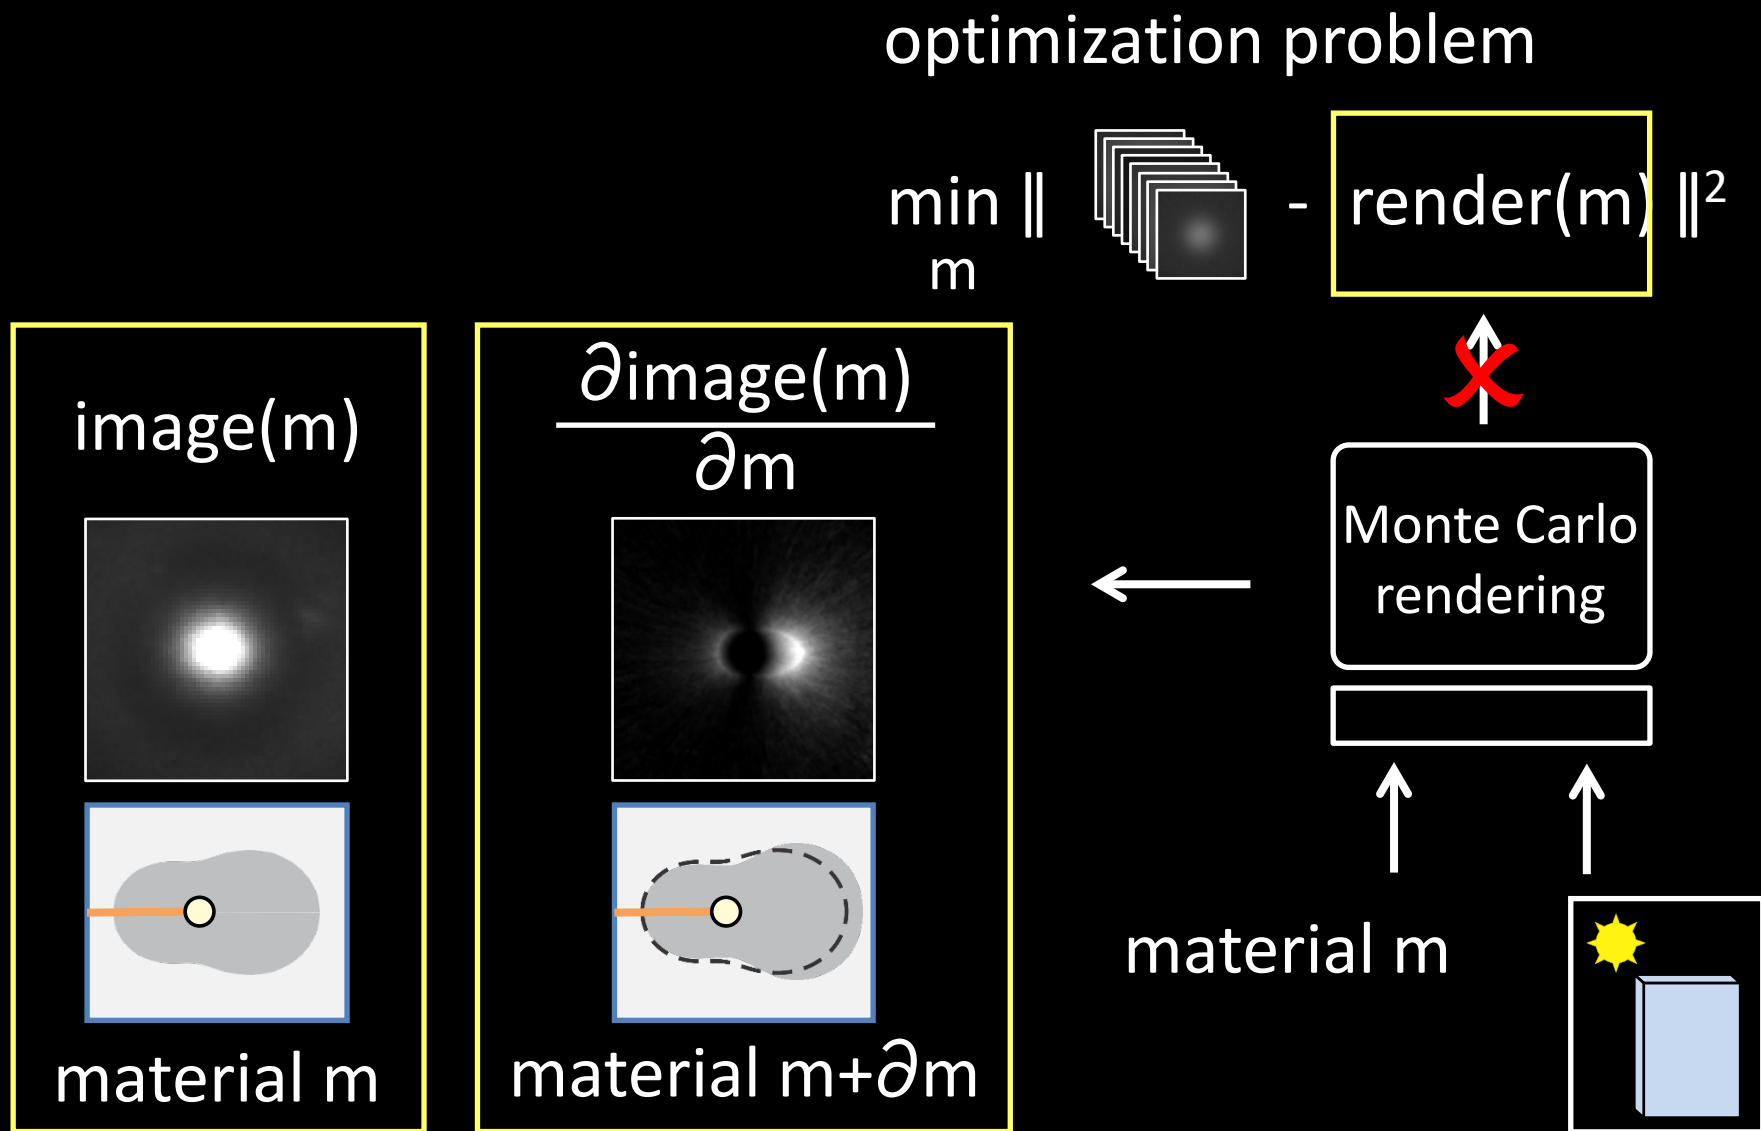


Other scattering materials



everyday materials
[Gkioulekas et al. 2013]




industrial dispersions
[Gkioulekas et al. 2013]

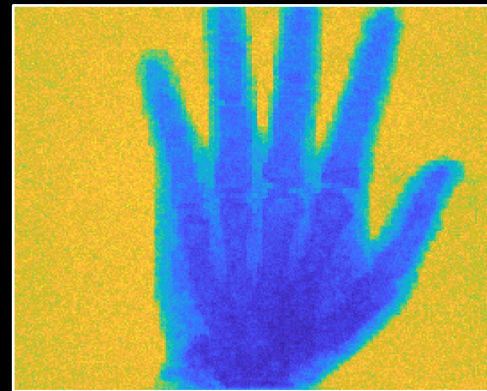

computed tomography
[Geva et al. 2018]




optical
tomography
[Gkioulekas et al.
2016]

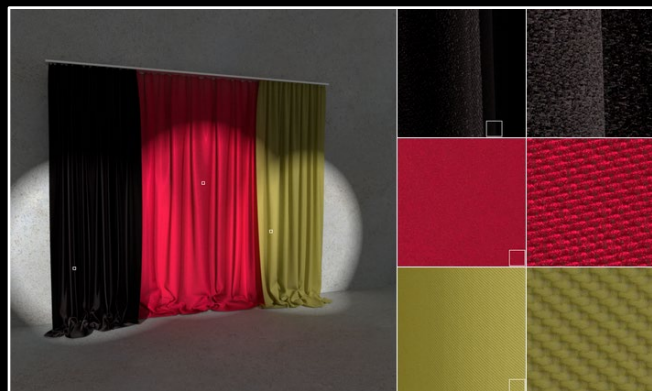

woven fabrics
[Khungurn et al. 2015,
Zhao et al. 2016]




3D printing
[Elek et al. 2017, 2019]

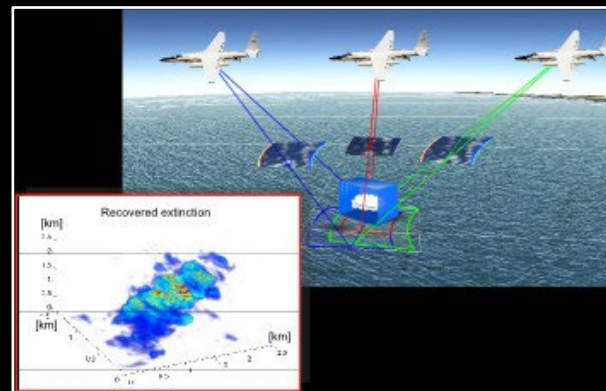

clouds
[Levis et al. 2015, 2017]

Making sense of global illumination

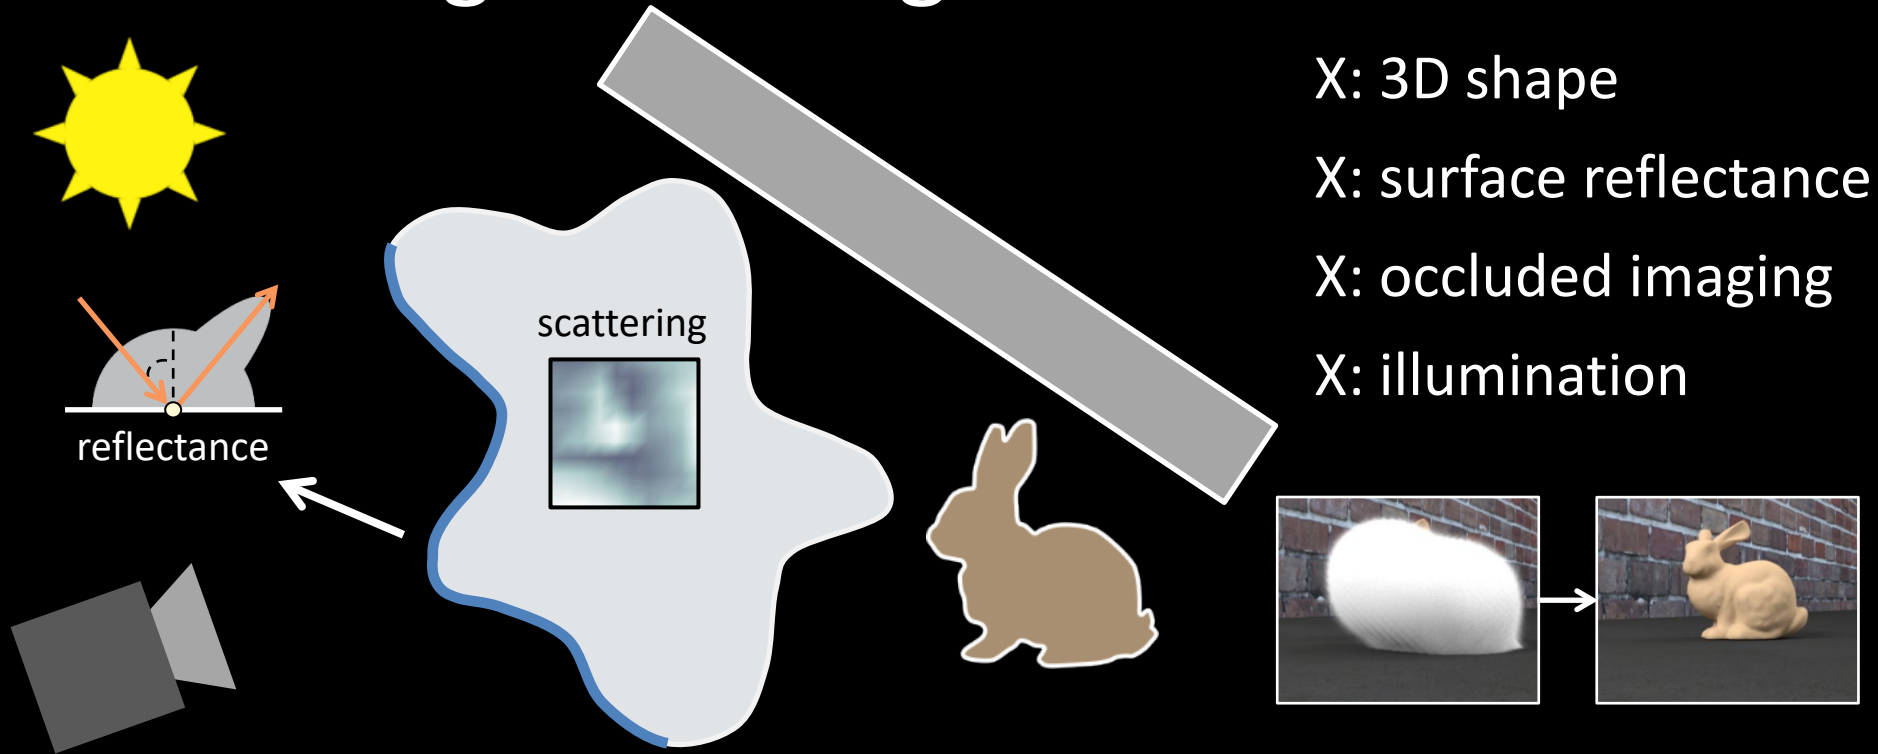

analysis by synthesis

$$\min_X \left\| \text{img} - \text{render}(X) \right\|^2$$

stochastic gradient descent

while (not converged)


update X with

$$\frac{\partial \tilde{\text{loss}}(X)}{\partial X}$$

Monte-Carlo rendering

differentiable rendering: image
gradients with respect to arbitrary X

Differentiable rendering and deep learning

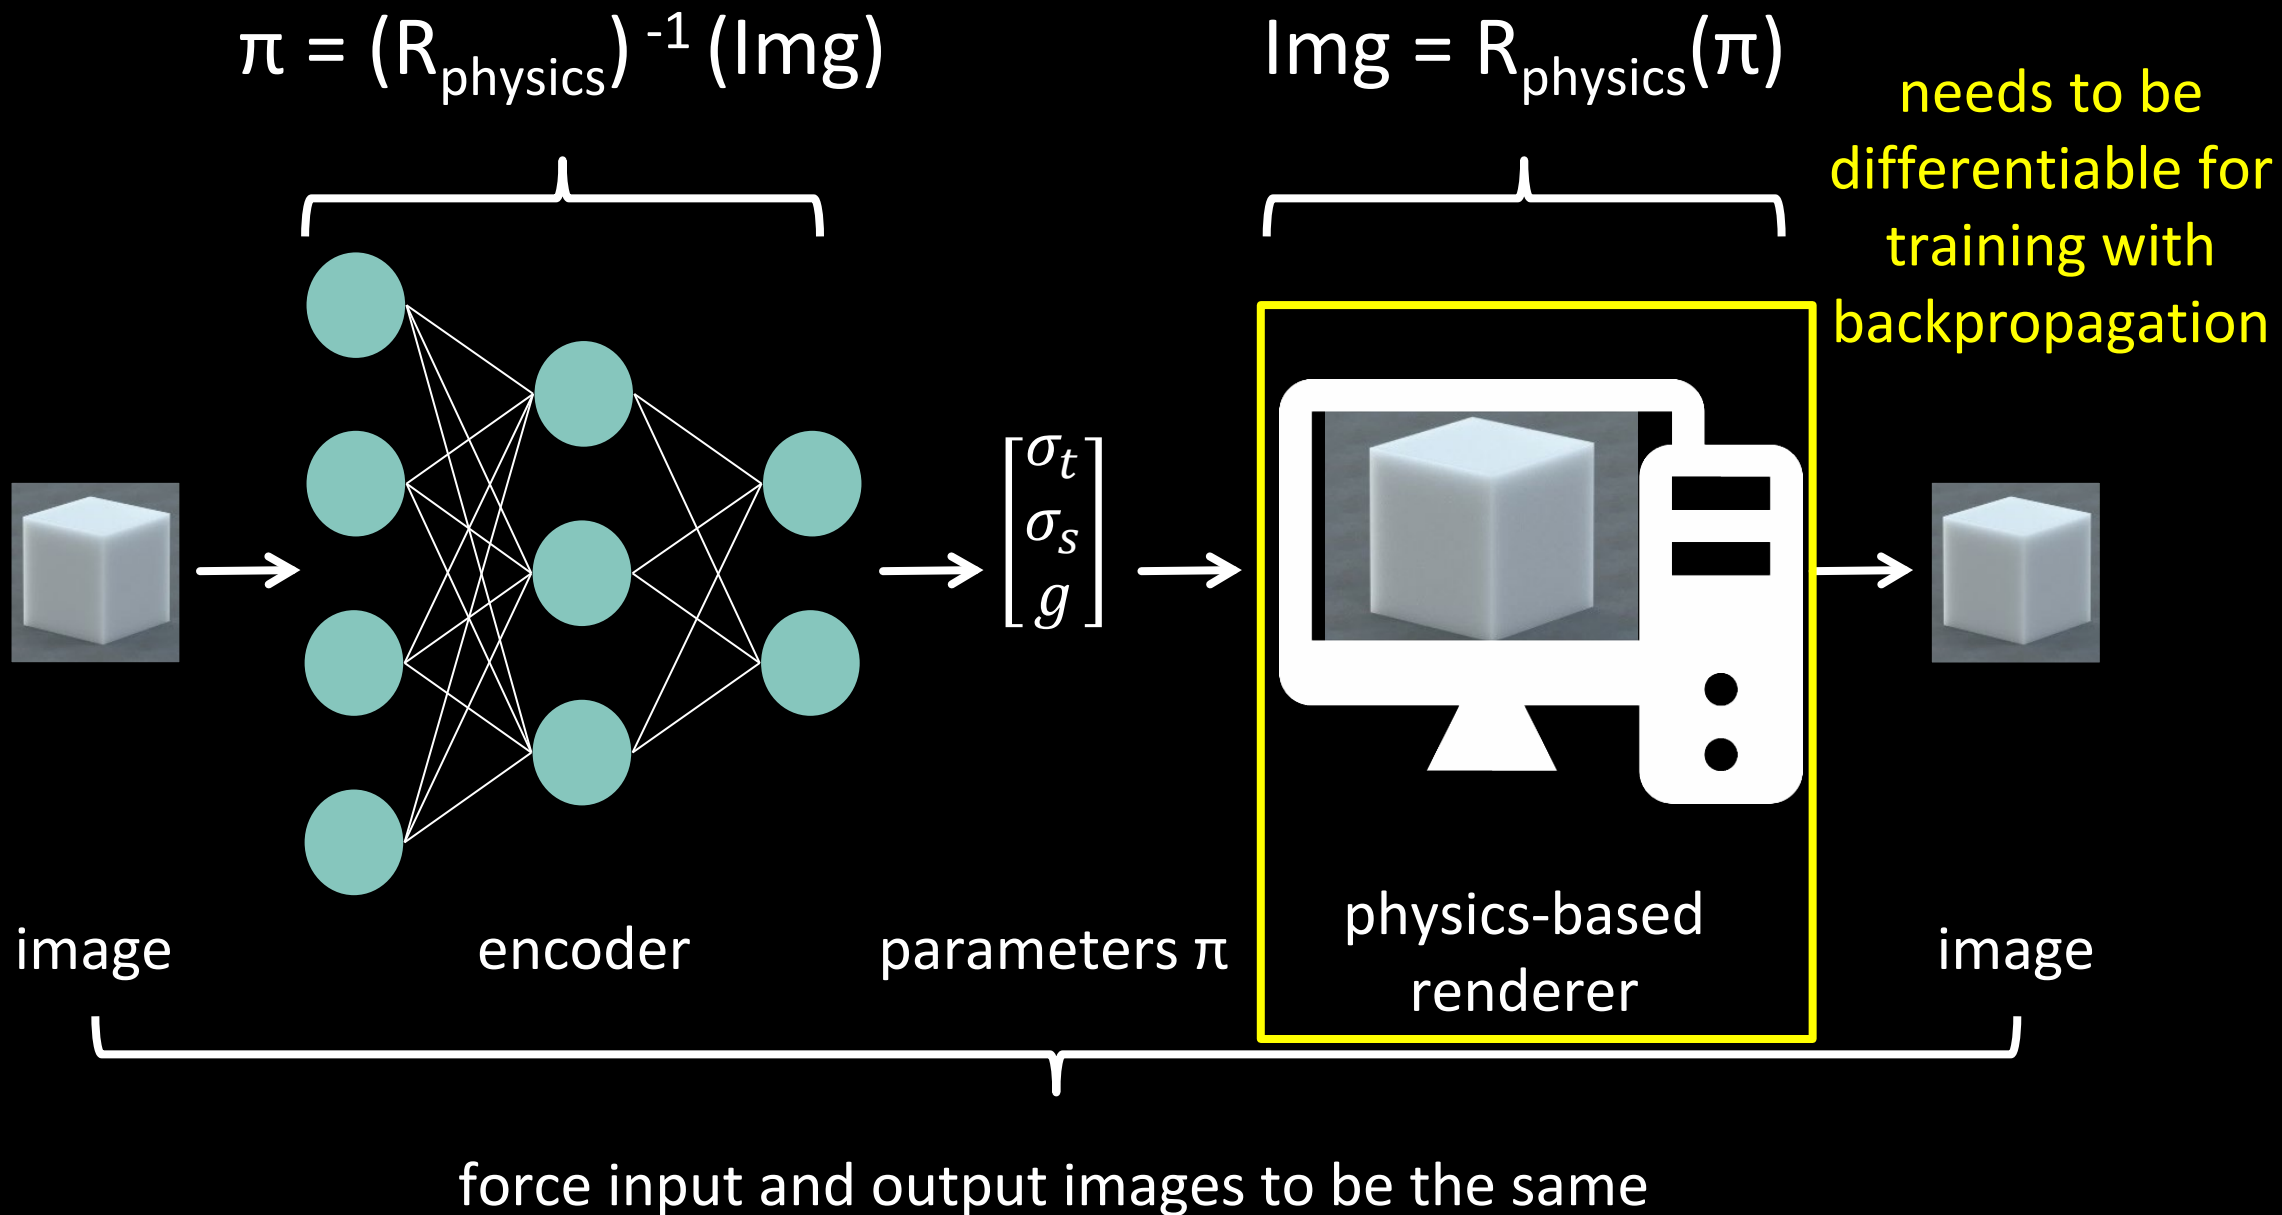

Differentiable rendering


Not related to:

Gradient-Domain Path Tracing

[Markus Kettunen](#)¹ [Marco Manzi](#)² [Miika Aittala](#)¹ [Jaakko Lehtinen](#)^{1,3} [Frédo Durand](#)⁴ [Matthias Zwicker](#)²

¹[Aalto University](#) ²[University of Bern](#) ³[NVIDIA](#) ⁴[MIT CSAIL](#)

[ACM Transactions on Graphics 34\(4\) \(Proc. SIGGRAPH 2015\)](#).

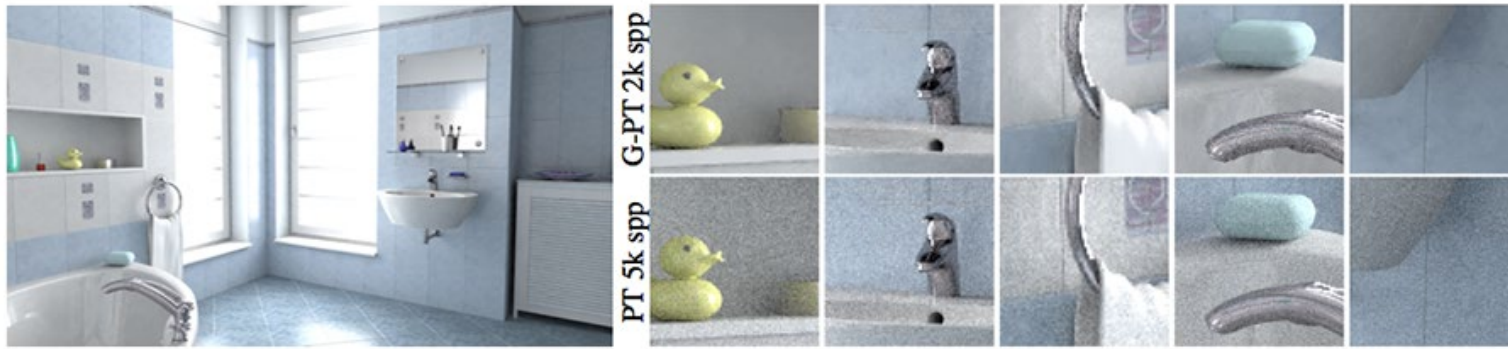

SIGGRAPH Asia 2018 Courses

Light Transport Simulation in the Gradient Domain



“Gradient” in their case refers to image edges.

REMINDER (?) FROM CALCULUS

Reminder from calculus

Differentiation under the integral sign

Also known as the Leibniz integral rule

$$\frac{d}{d\pi} \int_{a(\pi)}^{b(\pi)} f(x, \pi) dx \stackrel{?}{=} \int_{a(\pi)}^{b(\pi)} \frac{d}{d\pi} f(x, \pi) dx$$

Move derivative
inside integral

Account for changes in
integration limits

$$+ f(b(\pi), \pi) \frac{db(\pi)}{d\pi} - f(a(\pi), \pi) \frac{da(\pi)}{d\pi}$$

Account for discontinuities of
integrand that depend on π

$$+ \sum_i (f(c_i(\pi)^-, \pi) - f(c_i(\pi)^+, \pi)) \frac{dc_i(\pi)}{d\pi}$$

A simple example

$$f(x, \pi) = \begin{cases} 0 & \text{if } x < 2\pi \\ 1 & \text{if } x \geq 2\pi \end{cases}$$

$$\frac{d}{d\pi} \int_0^{4\pi} f(x, \pi) dx = \int_0^{2\pi} \frac{d}{d\pi} 0 dx + \int_{2\pi}^{4\pi} \frac{d}{d\pi} 1 dx$$

Move
derivative
inside integral

Account for changes in
integration limits

$$+ 1 \frac{d(4\pi)}{d\pi} - 0 \frac{d0}{d\pi}$$

Account for discontinuities of
integrand that depend on π

$$+ (0 - 1) \frac{d(2\pi)}{d\pi}$$

Leibniz integral rule

Differentiation under the integral sign

Also known as the Leibniz integral rule

$$\frac{d}{d\pi} \int_{a(\pi)}^{b(\pi)} f(x, \pi) dx = \int_{a(\pi)}^{b(\pi)} \frac{d}{d\pi} f(x, \pi) dx$$

Interior integral

Move derivative
inside integral

Account for changes in
integration limits

Boundary terms

$$+ f(b(\pi), \pi) \frac{db(\pi)}{d\pi} - f(a(\pi), \pi) \frac{da(\pi)}{d\pi}$$

Account for discontinuities of
integrand that depend on π

$$+ \sum_i (f(c_i(\pi)^-, \pi) - f(c_i(\pi)^+, \pi)) \frac{dc_i(\pi)}{d\pi}$$

Simplified Leibniz integral rule

Differentiation under the integral sign

Also known as the Leibniz integral rule

$$\frac{d}{d\pi} \int_a^b f(x, \pi) dx = \int_a^b \frac{d}{d\pi} f(x, \pi) dx$$

Interior integral

Move derivative inside integral

Account for changes in integration limits when:

- Integration limits are independent of π .
- Integrand discontinuities are independent of π .

Account for discontinuities of integrand that depend on π

Boundary terms

$$+ f(b(\pi), \pi) \frac{db(\pi)}{d\pi} - f(a(\pi), \pi) \frac{da(\pi)}{d\pi}$$

$$+ \sum_i (f(c_i(\pi)^-, \pi) - f(c_i(\pi)^+, \pi)) \frac{dc_i(\pi)}{d\pi}$$

Reynolds transport theorem

$$\frac{d}{d\pi} \int_{\Omega(\pi)} f(x, \pi) dA(x) \stackrel{?}{=} \int_{\Omega(\pi)} \frac{df(x, \pi)}{d\pi} dA(x) + \int_{\partial\Omega(\pi)} g(x, \pi) dl(x)$$


Reynolds transport theorem [1903]
 Generalization of the Leibniz rule

Interior integral

Boundary integral


Boundary domain

discontinuity points \cup boundary of domain Ω
 (if they depend on π)

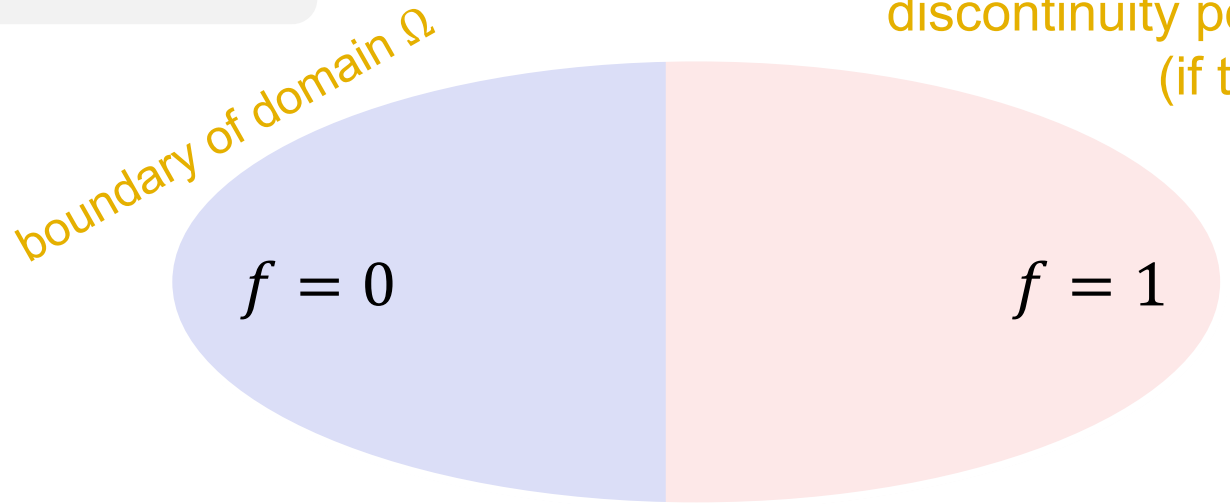

DIFFERENTIATING DIRECT ILLUMINATION

Direct illumination integral

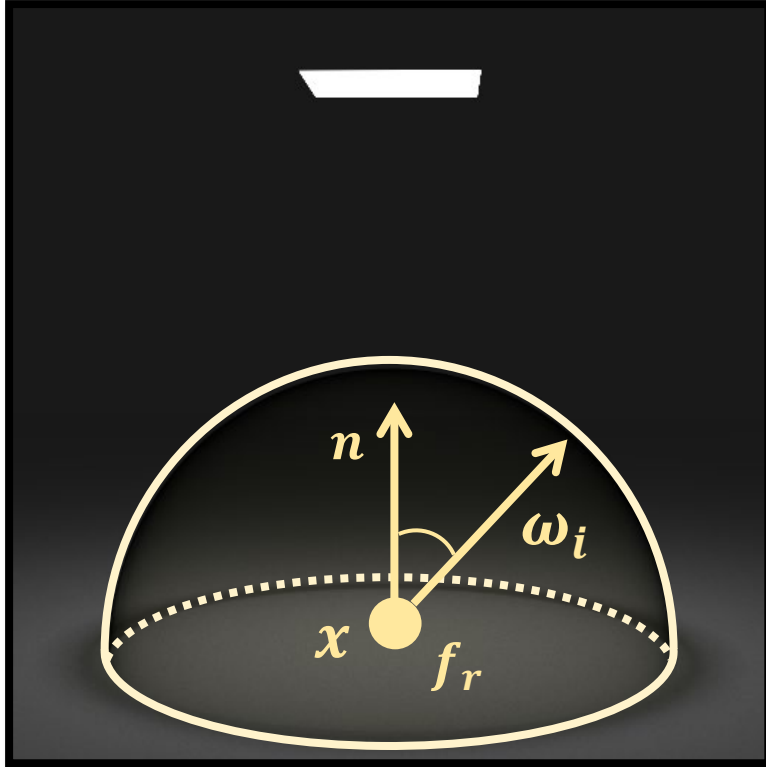

Radiance from x :

$$I = \int_{\mathbb{H}^2} \overset{\text{Reflectance (BRDF)}}{f_r(\omega_i, \omega_o)} \overset{\text{Incident radiance}}{L_i(\omega_i)} \overset{\text{Shading wrt normal } n}{(n \cdot \omega_i)} d\sigma(\omega_i)$$


Unit hemisphere

Monte Carlo rendering:

- Sample random directions ω_i^s from PDF $p(\omega_i)$
- Form estimator

$$I \approx \sum_s \frac{f_r(\omega_i^s, \omega_o) L_i(\omega_i^s) (n \cdot \omega_i^s)}{p(\omega_i^s)}$$


Differential direct illumination

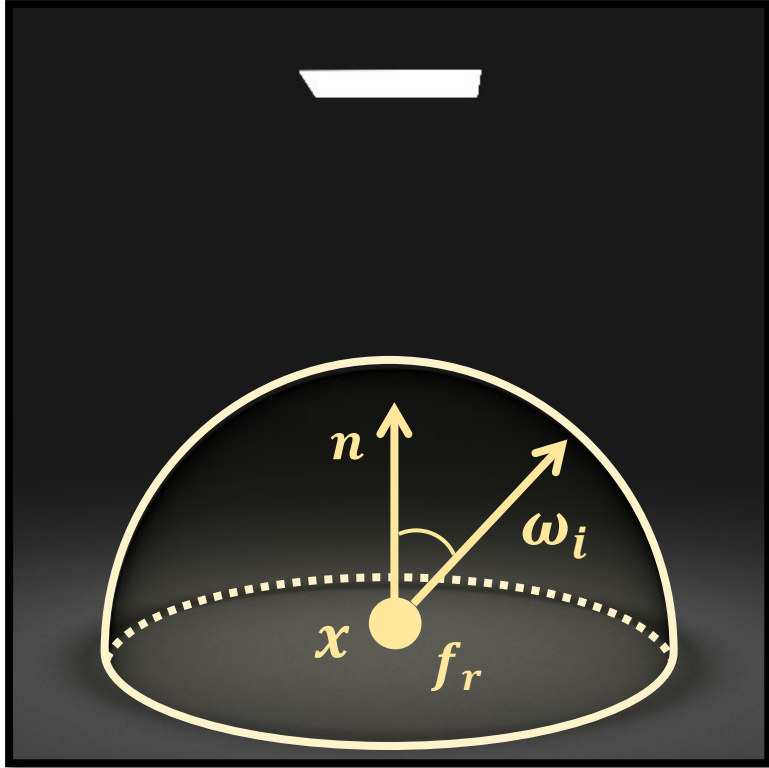

Differential radiance from x :

$$\frac{dI}{d\pi} = \frac{d}{d\pi} \int_{\mathbb{H}^2} f_r(\omega_i, \omega_o) L_i(\omega_i) (n \cdot \omega_i) d\sigma(\omega_i)$$

Differential direct illumination: local parameters

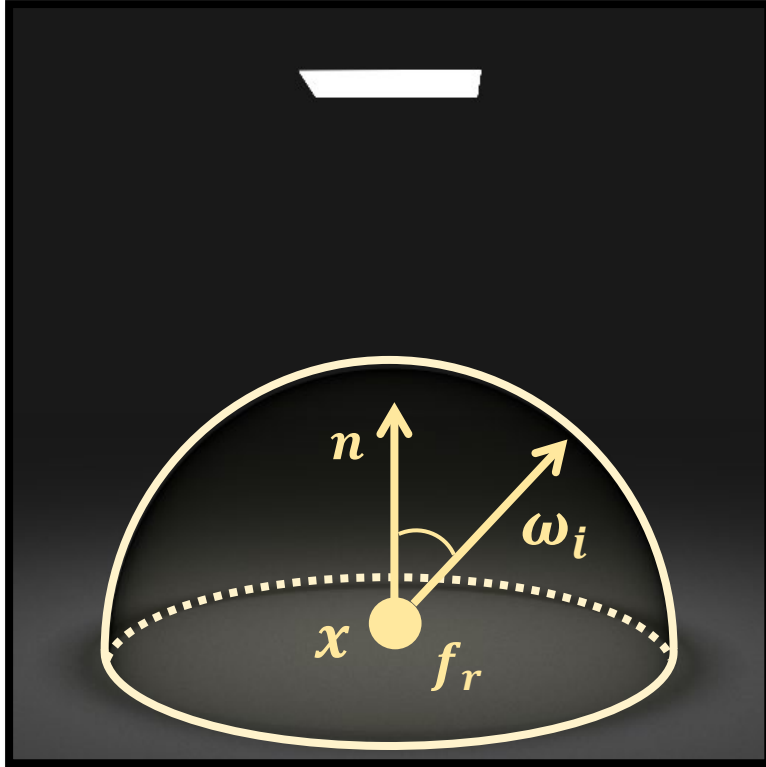

π : local parameters

- BRDF parameters
- shading normal
- illumination brightness

Differential radiance from x :

$$\frac{dI}{d\pi} = \int_{\Omega} \frac{d}{d\pi} \{ f_r(\omega_i, \omega_o) L_i(\omega_i) (n \cdot \omega_i) \} d\omega_i$$

Just move derivative inside integral

Monte Carlo differentiable rendering:

- Sample random directions ω_i^s from PDF $p(\omega_i)$


- Form estimator

Just differentiate numerator

[Khungurn et al. 2015, Gkioulekas et al. 2015]

$$\frac{dI}{d\pi} \approx \sum_s \frac{\frac{d}{d\pi} \{ f_r(\omega_i^s, \omega_o) L_i(\omega_i^s) (n \cdot \omega_i^s) \}}{p(\omega_i^s)}$$

Alternative estimator

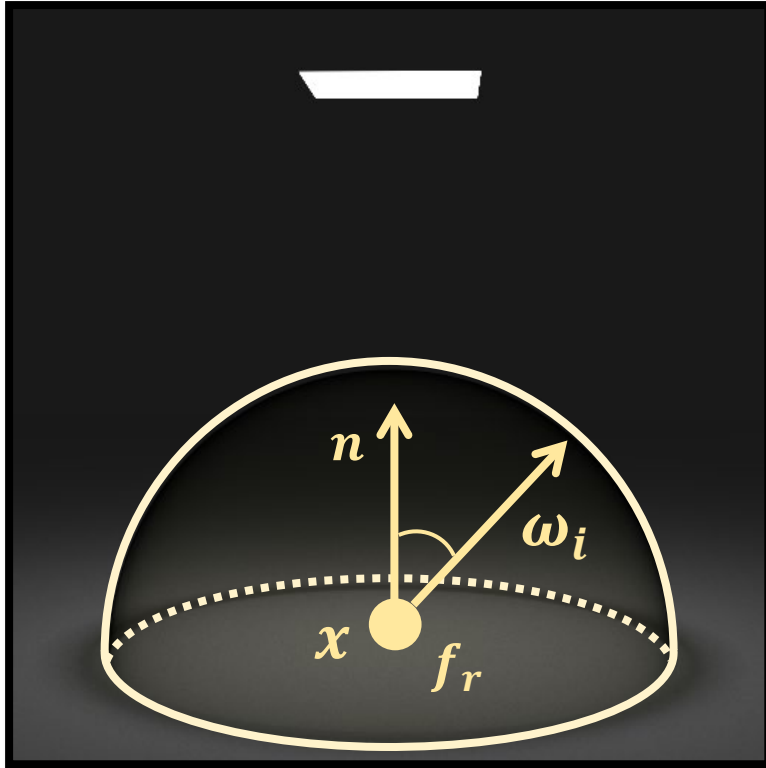

- π : local parameters
- BRDF parameters

Differential radiance from x :

$$\frac{dI}{d\pi} = \int_{\mathbb{H}^2} \frac{d}{d\pi} \{f_r(\omega_i, \omega_o, \pi) L_i(\omega_i) (n \cdot \omega_i)\} d\sigma(\omega_i)$$

Just move derivative inside integral


Monte Carlo estimation:

- Sample random directions ω_i^s from PDF $p(\omega_i, \pi)$
- Form estimator

Differentiate entire contribution
[Zeltner et al. 2021]

$$\frac{dI}{d\pi} \approx \sum_{i^s} \frac{\frac{d}{d\pi} \{f_r(\omega_i^s, \omega_o, \pi) L_i(\omega_i^s) (n \cdot \omega_i^s)\}}{p(\omega_i^s, \pi)}$$

Differential direct illumination: global parameters

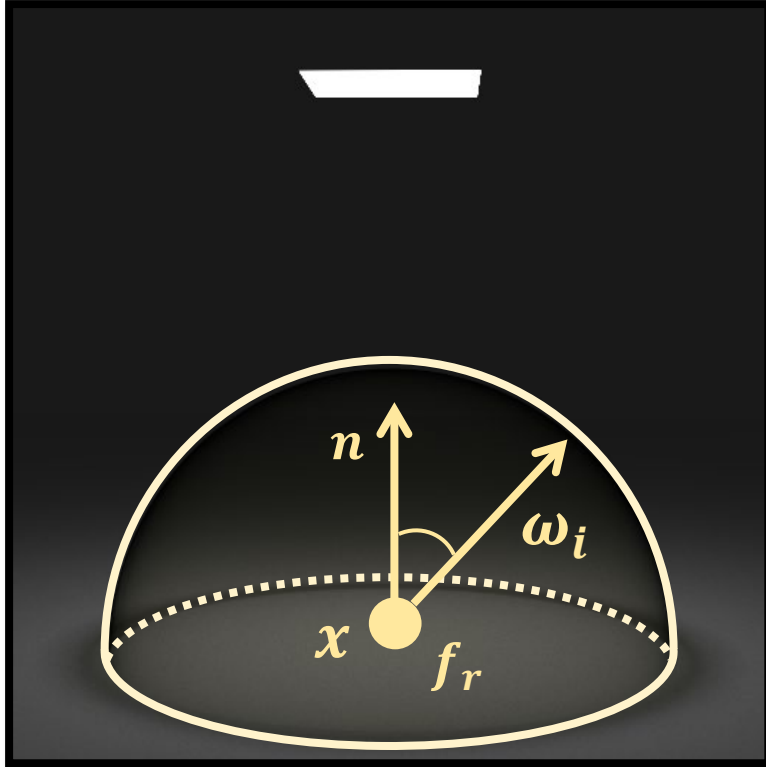

Differential radiance from x :

$$\frac{dI}{d\pi} = \frac{d}{d\pi} \int_{\mathbb{H}^2} f_r(\omega_i, \omega_o) L_i(\omega_i) (n \cdot \omega_i) d\sigma(\omega_i)$$


~~$$= \int_{\mathbb{H}^2} \frac{d}{d\pi} \{ f_r(\omega_i, \omega_o) L_i(\omega_i) (n \cdot \omega_i) \} d\sigma(\omega_i)$$~~

Need to use full Reynolds transport theorem

π : global parameters

- shape and pose of different scene elements (camera, sources, objects)


Discontinuities in the integrand

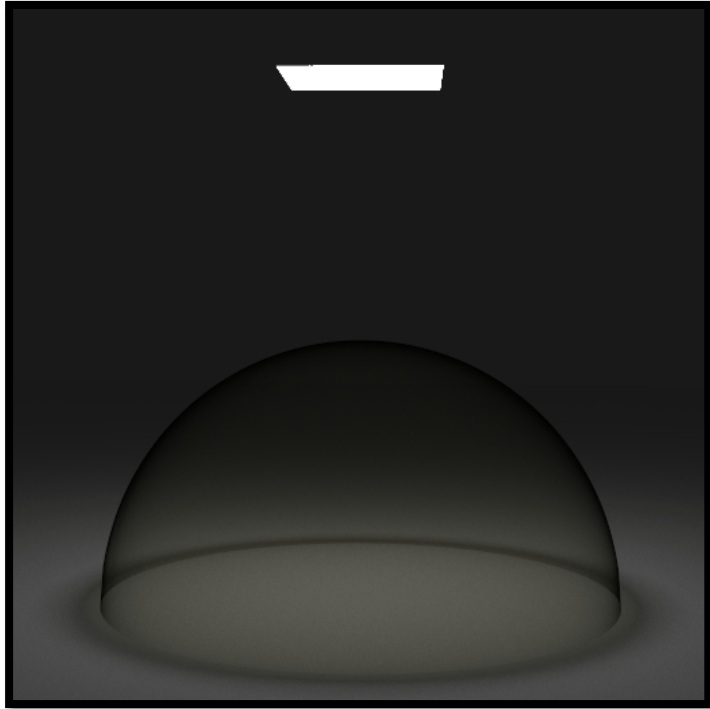


π : size of the emitter

$$I = \int_{\mathbb{H}^2} \underbrace{f_r(\omega_i, \omega_o) L_i(\omega_i) (n \cdot \omega_i)}_{f(\omega_i)} d\sigma(\omega_i)$$

Low  High

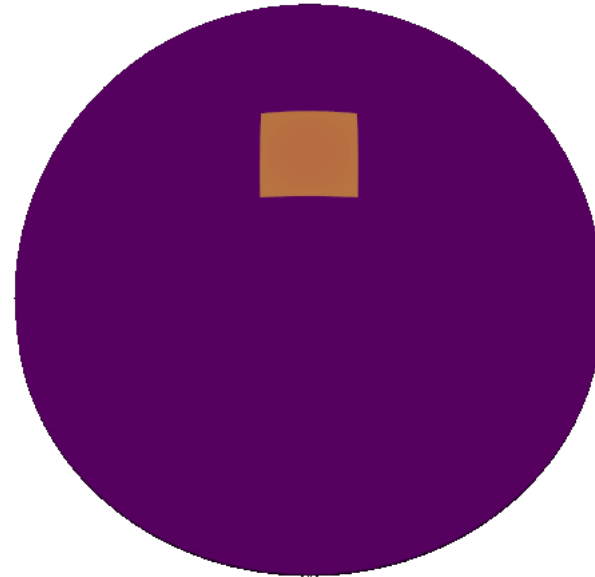


Integrand
 $f(\omega_i)$

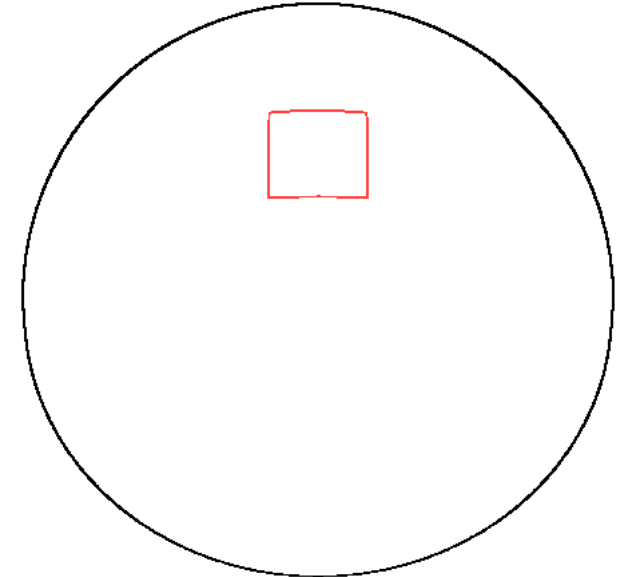

Discontinuous points
(π -dependent)

Applying the Reynolds transport theorem

$$I = \int_{\mathbb{H}^2} f(\omega_i, \omega_o) d\sigma(\omega_i)$$




$$\frac{dI}{d\pi} = \int_{\mathbb{H}^2} \frac{df}{d\pi} d\sigma + \int_{\partial\mathbb{H}^2} g dl$$


Interior integral
(same as for local
parameters)

Boundary
integral

Low  High

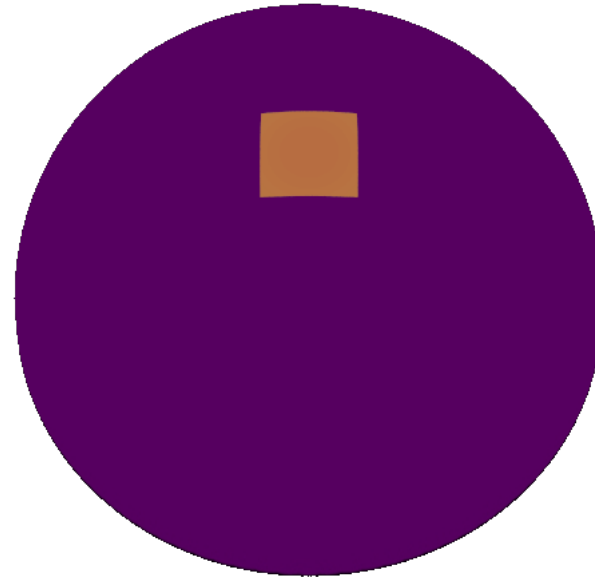

Integrand
 $f(\omega_i)$

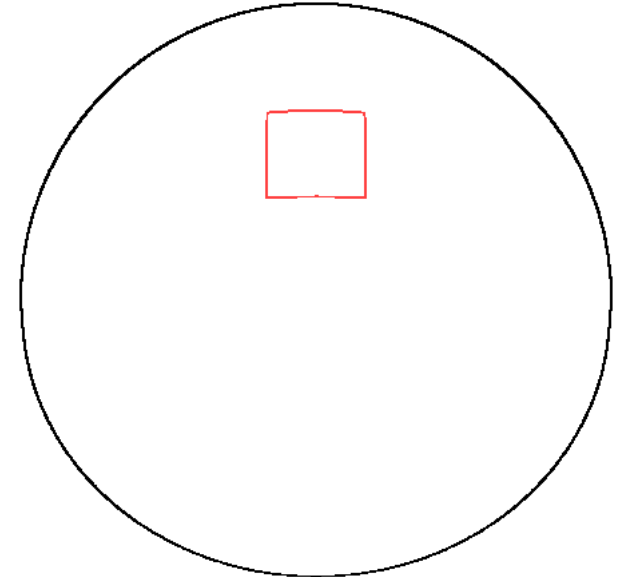


Discontinuous points
(π -dependent)


[Ramamoorthi et al. 2007, Li et al. 2019]

Reparameterizing the direct illumination integral


Hemispherical integral

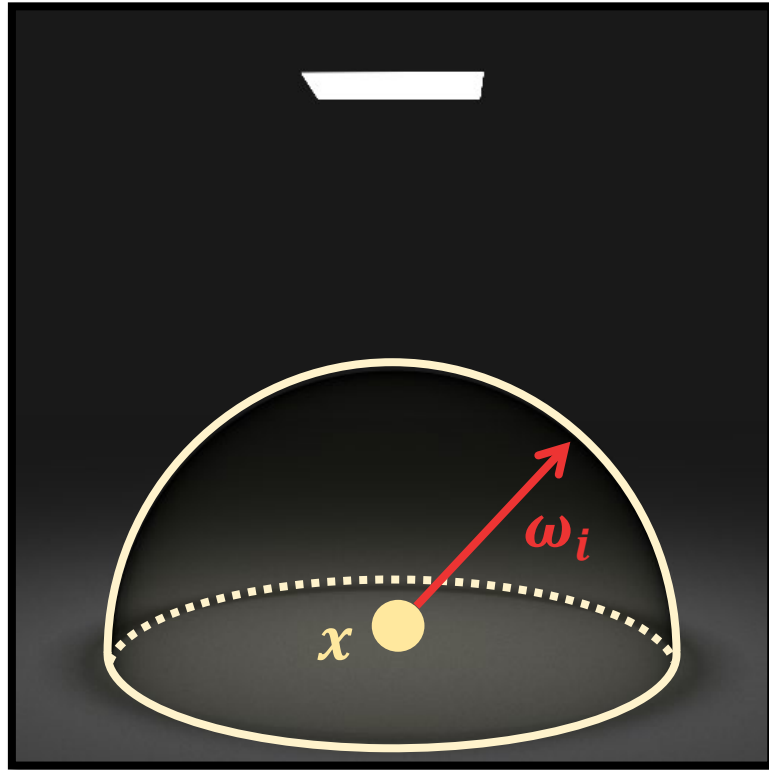

$$I = \int_{\mathbb{H}^2} f(\boldsymbol{\omega}_i) d\sigma(\boldsymbol{\omega}_i)$$

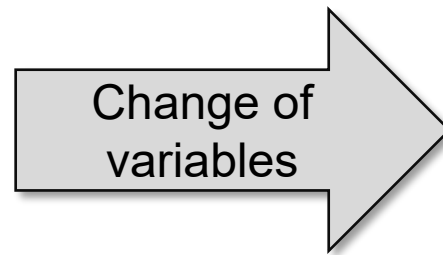

Surface integral

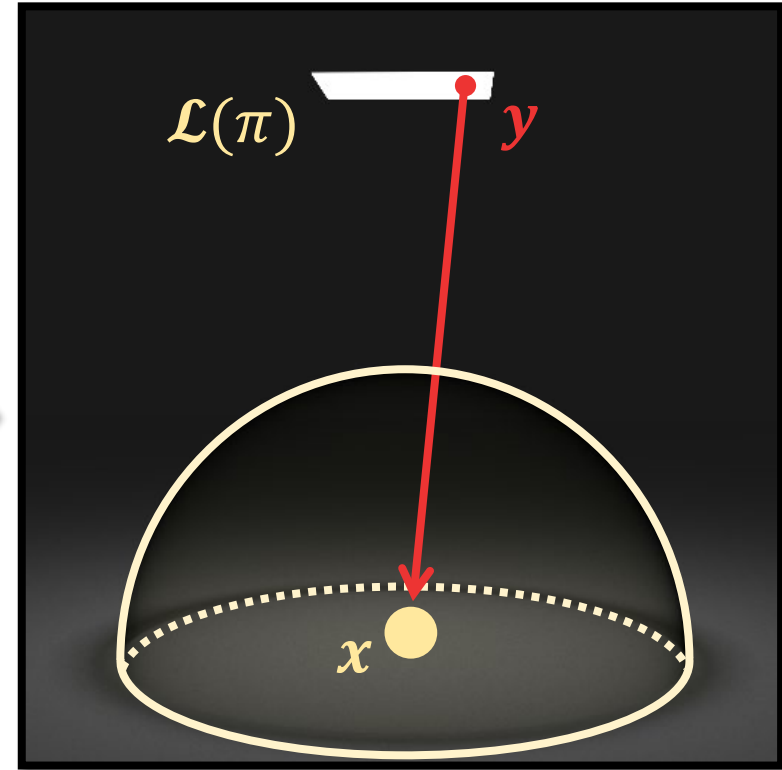


$$I = \int_{\mathcal{L}(\pi)} f(\mathbf{y} \rightarrow \mathbf{x}) G(\mathbf{x}, \mathbf{y}) dA(\mathbf{y})$$


Includes visibility, fall-off,
and foreshortening terms

Reparameterizing the direct illumination integral

Hemispherical integral

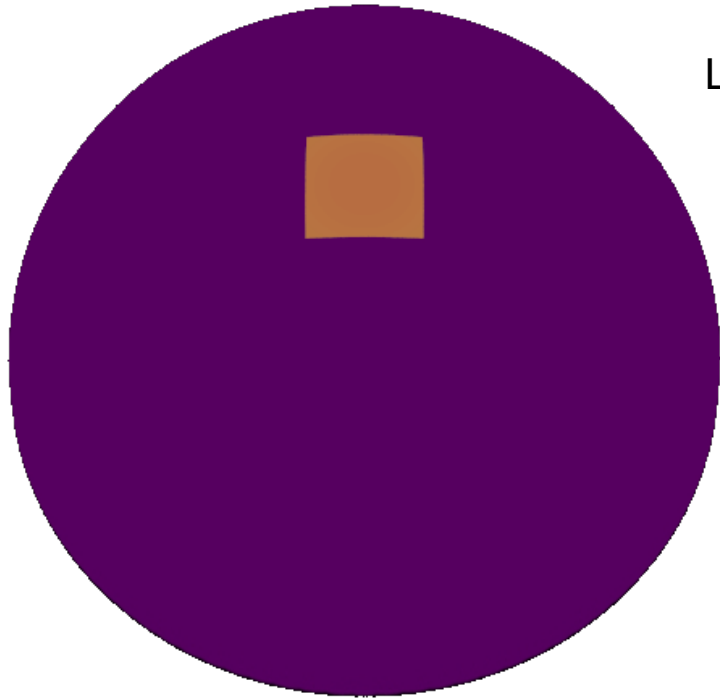

Low  High

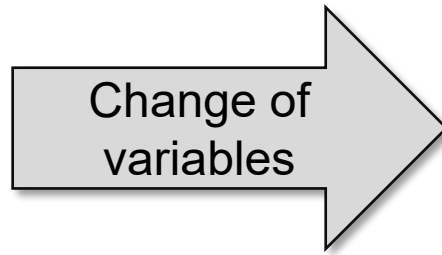

Surface integral



$$I = \int_{\mathbb{H}^2} \overset{\text{discontinuous}}{f(\omega_i)} d\sigma(\omega_i)$$

constant domain

$$I = \int_{\mathcal{L}(\pi)} \overset{\text{continuous}}{f(y \rightarrow x) G(x, y)} dA(y)$$




evolving domain

Differentiating the hemispherical integral


π : size of the emitter

Low  High

Discontinuities of f

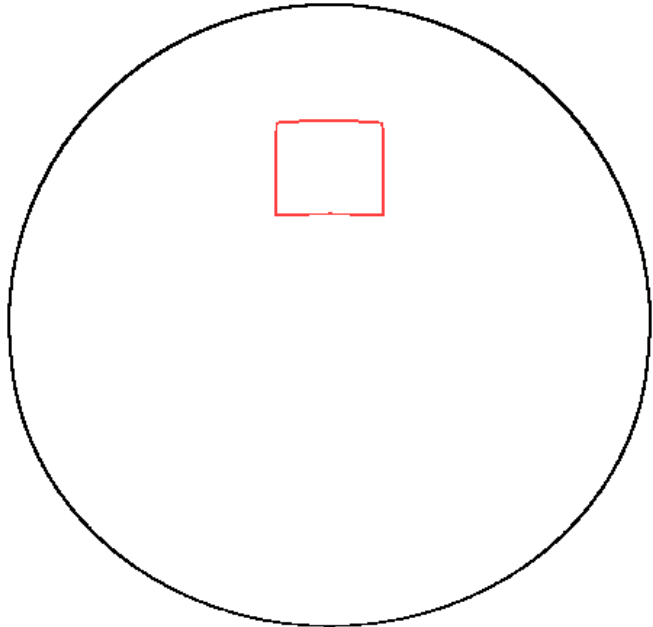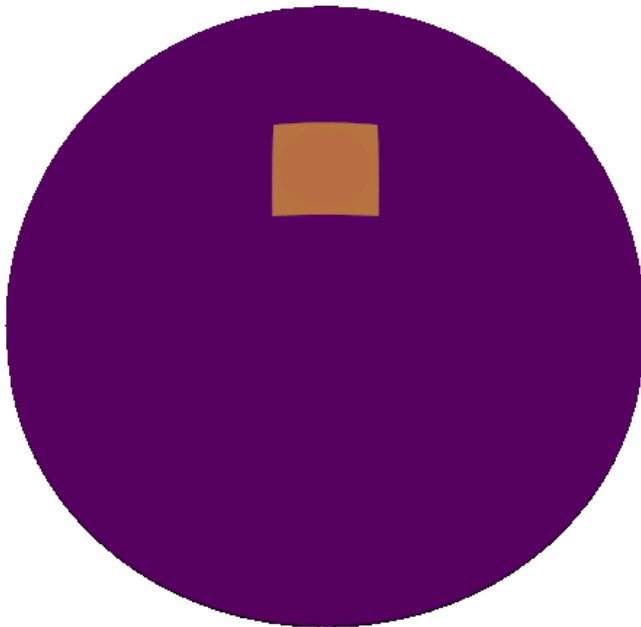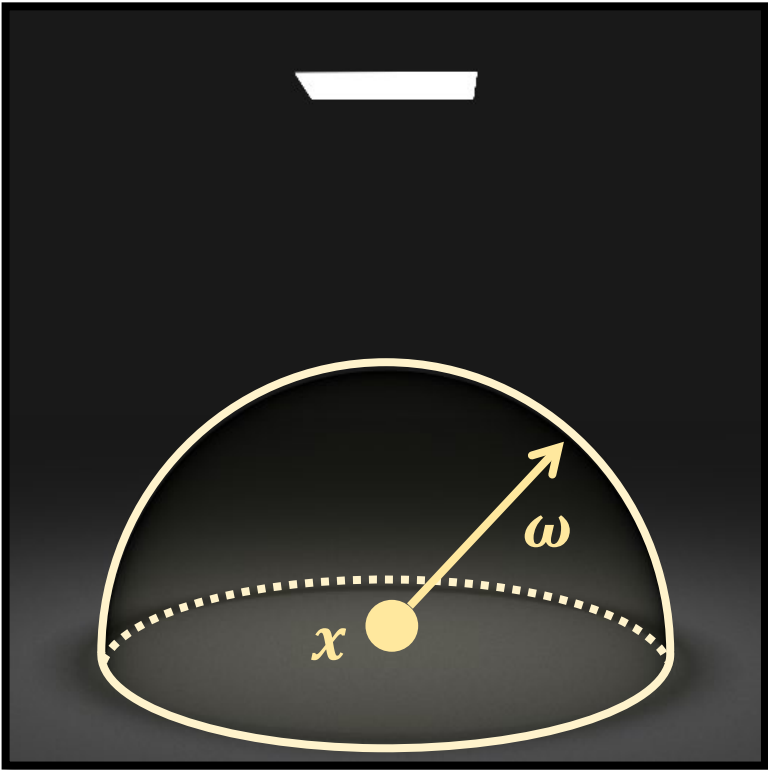

$$I = \int_{\mathbb{H}^2} f(\omega_i) d\sigma(\omega_i)$$

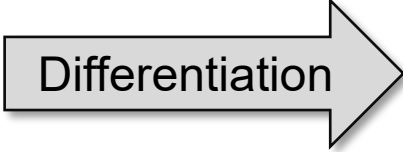

Reynolds transport theorem


$$\frac{dI}{d\pi} = \int_{\mathbb{H}^2} \frac{d(f)}{d\pi} d\sigma + \int_{\partial\mathbb{H}^2} g dl$$

Interior Boundary

Differentiating the area integral

π : size of the emitter

Low  High

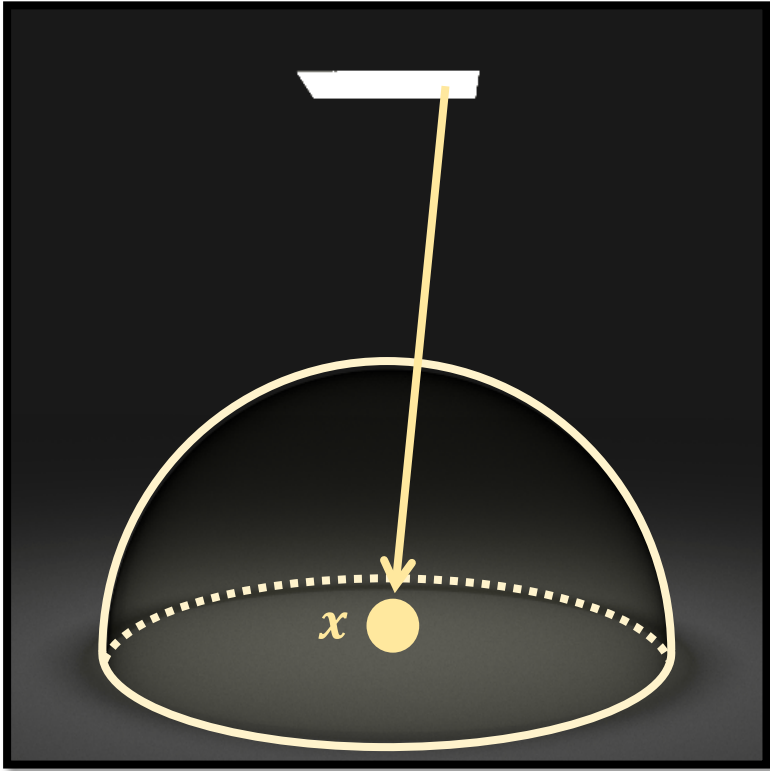

Boundary of $\mathcal{L}(\pi)$



$$I = \int_{\mathcal{L}(\pi)} f(y \rightarrow x) G(x, y) dA(y)$$



Reynolds transport theorem

$$\frac{dI}{d\pi} = \int_{\mathcal{L}(\pi)} \frac{d(fG)}{d\pi} dA + \int_{\partial\mathcal{L}(\pi)} g dl$$


Interior Boundary

Sources of discontinuities




Boundary edge



Sharp edge



Silhouette edge

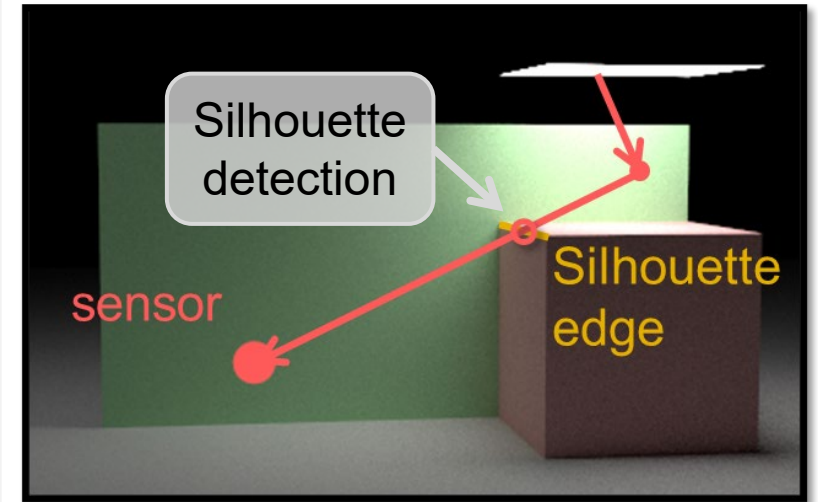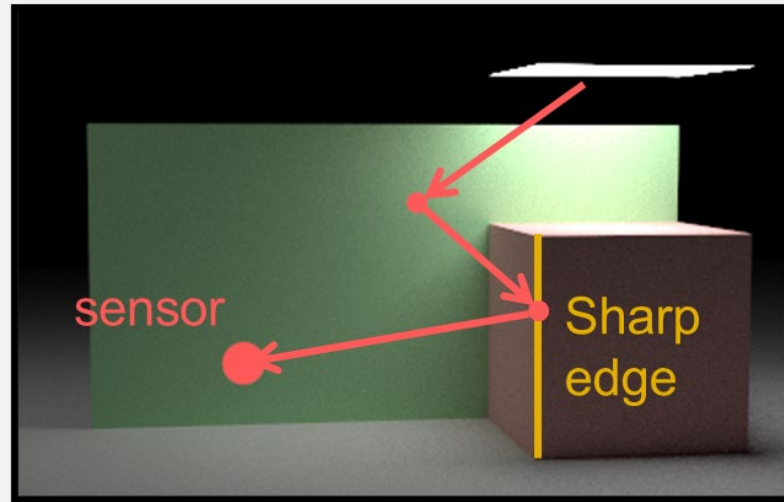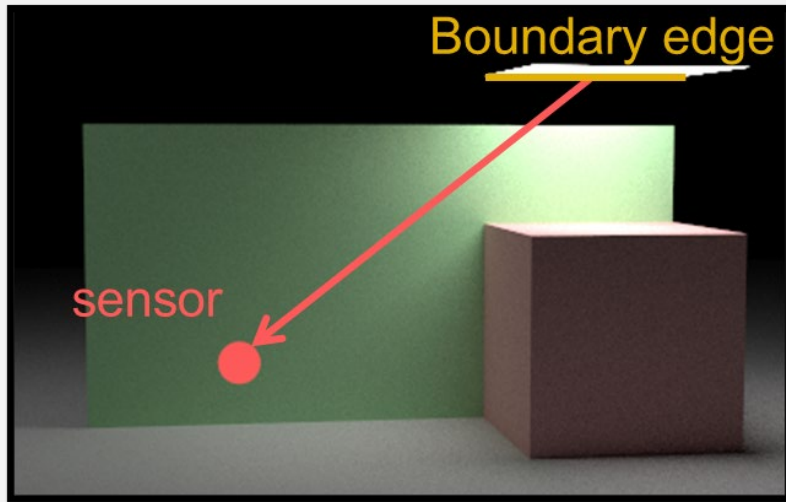


Topology-driven


Visibility-driven

Significance of the boundary integral


Negative  Zero  Positive

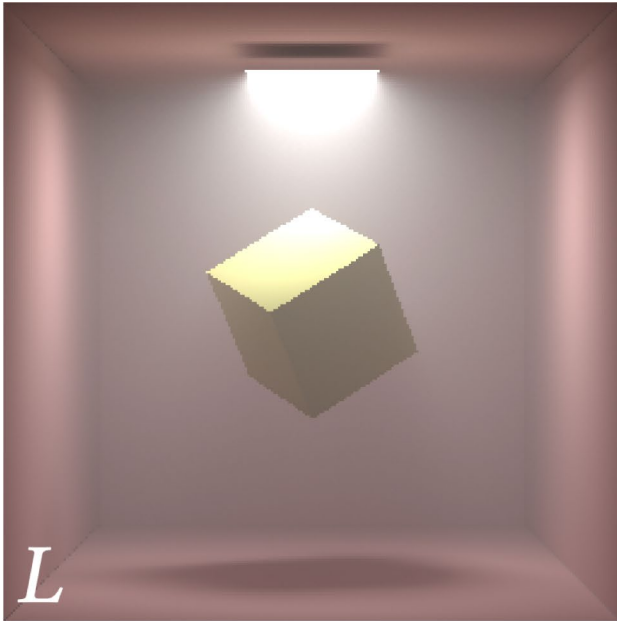

Original image

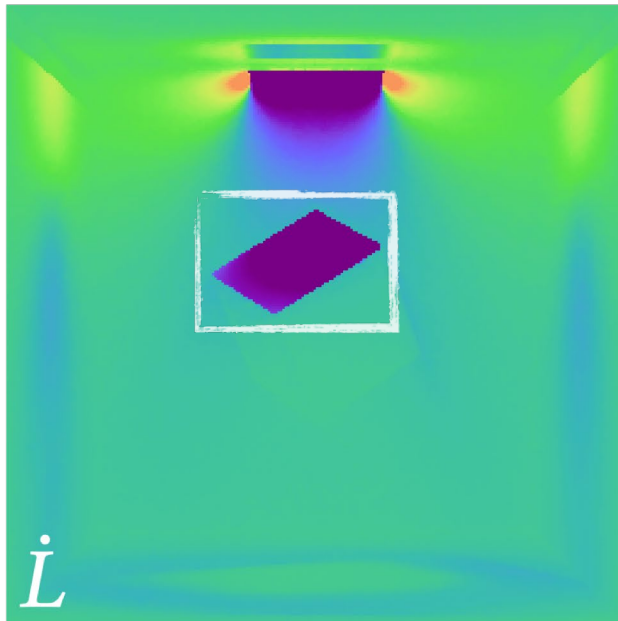


Derivative image
w.r.t. vertical offset of
the area light and the cube

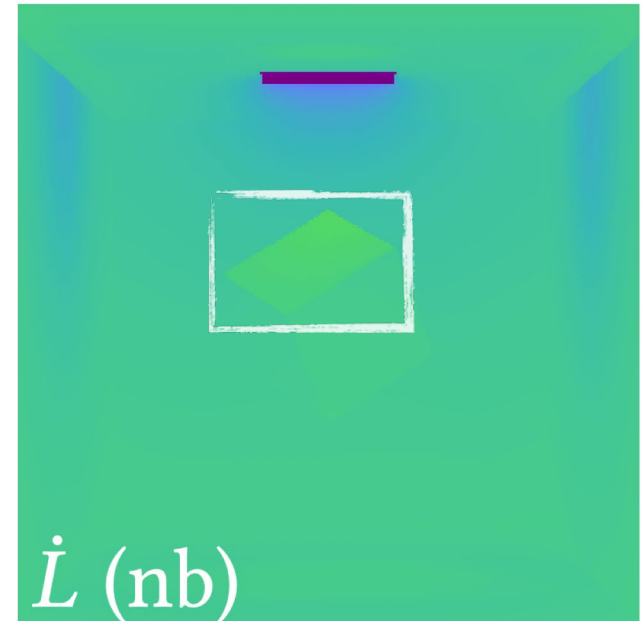

Derivative image
w/o boundary integral


Gradient Accuracy Matters

Inverse-rendering results with *identical* optimization settings

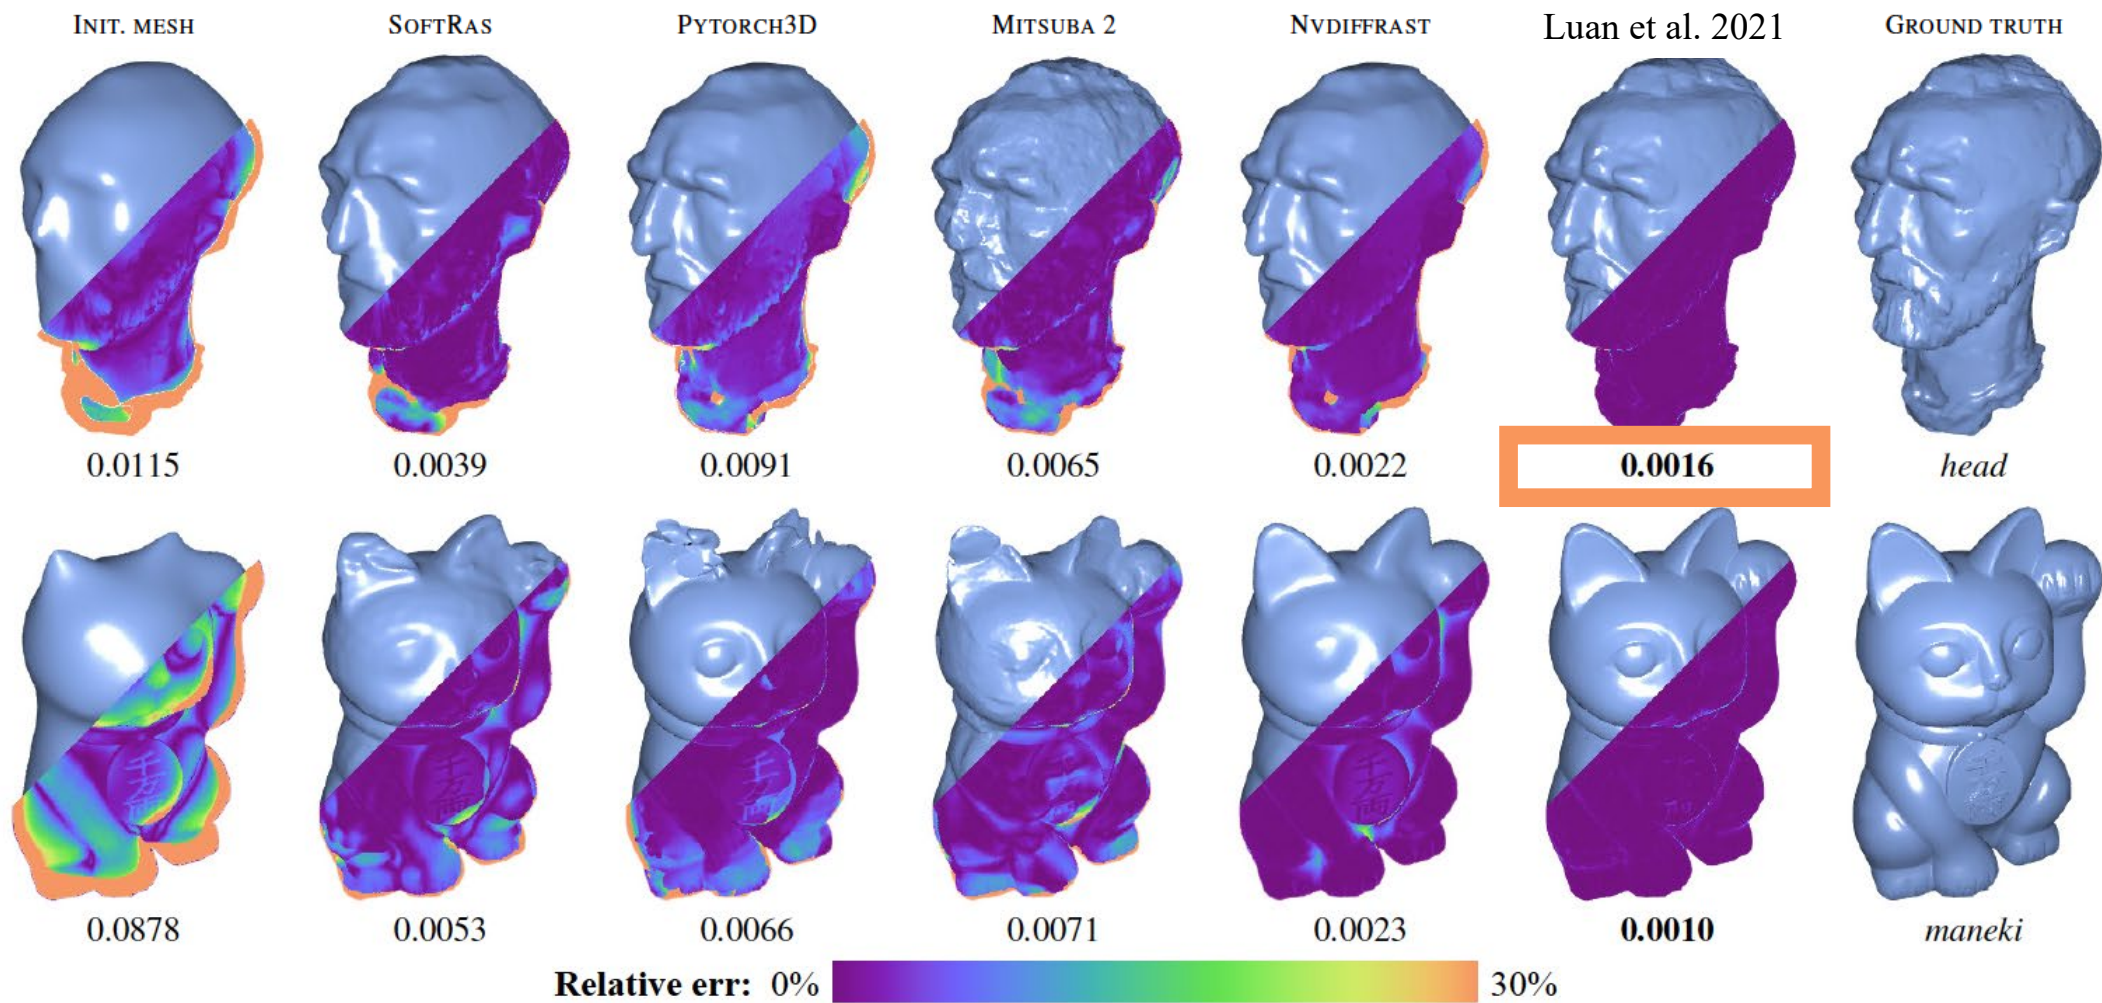


Sources of discontinuities

- We still need to account for discontinuities when using smooth closed surfaces (e.g., neural SDFs)

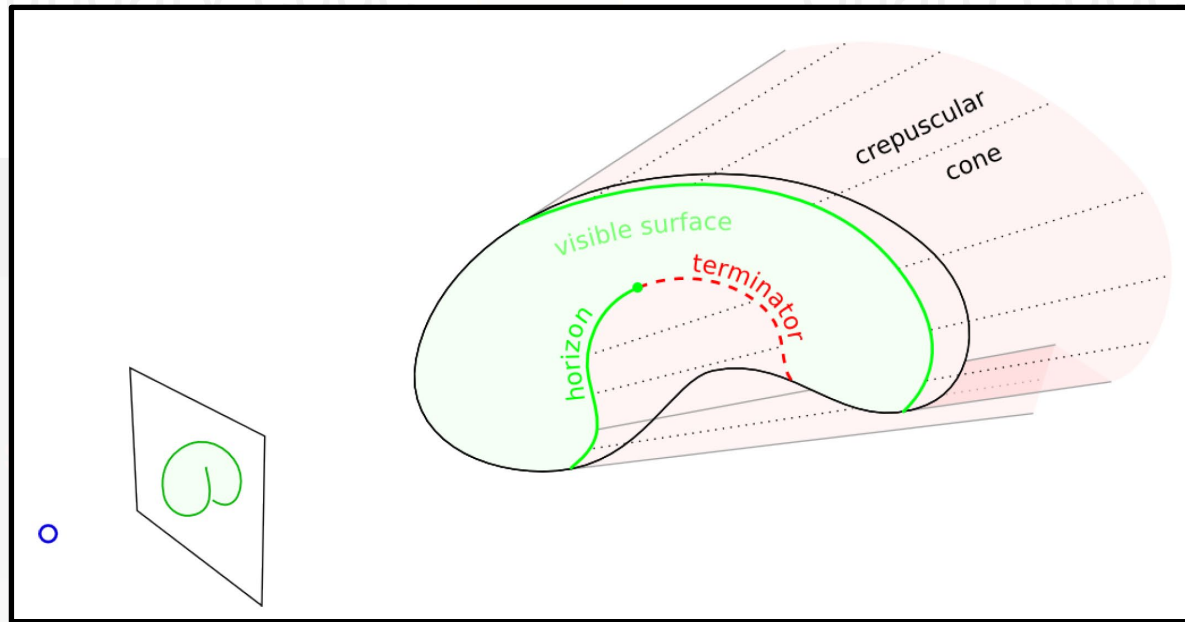

[Gargallo et al., ICCV 2007]

Silhouette edge

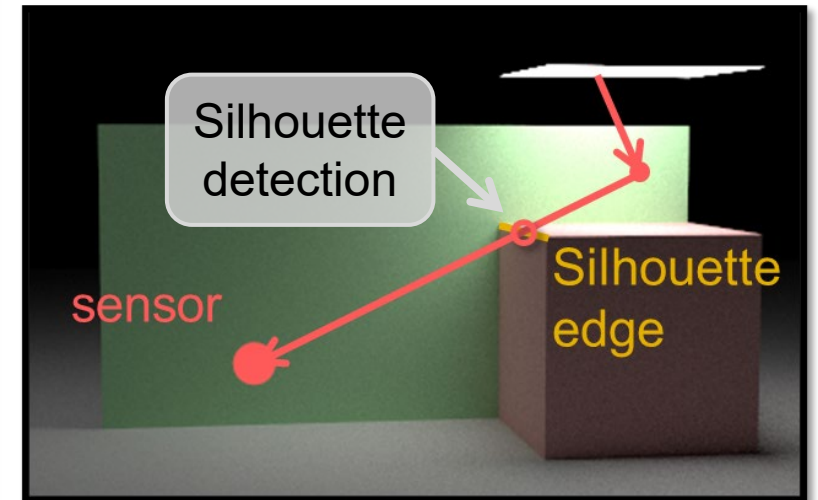


Visibility-driven

Topology-driven

DIFFERENTIATING GLOBAL ILLUMINATION


Images as path integrals

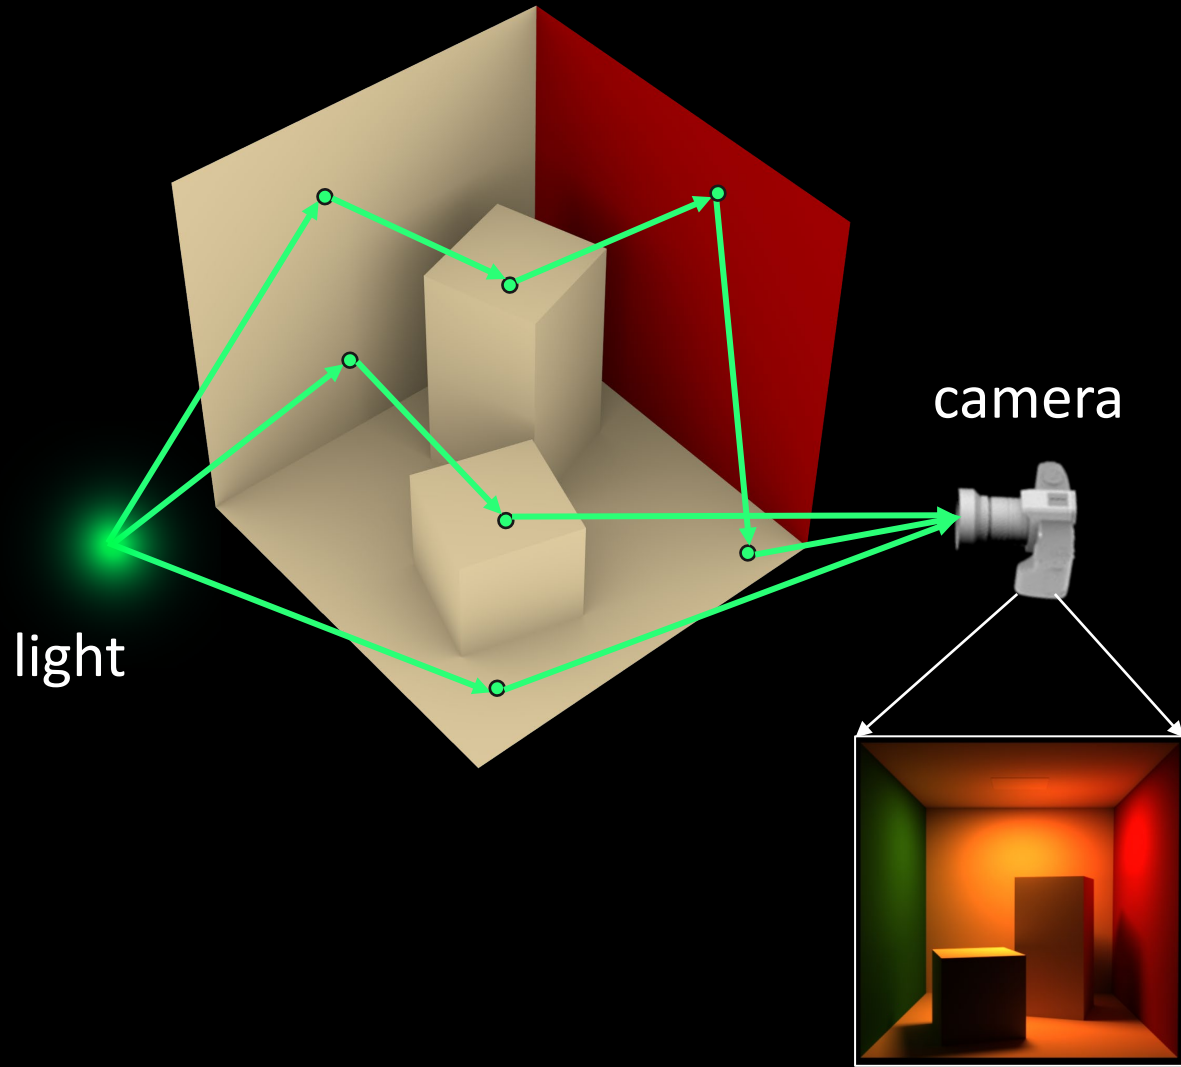

$$I(\pi) = \int_{\mathbb{P}} f(\bar{\mathbf{x}}; \pi) d\bar{\mathbf{x}}$$

- $\bar{\mathbf{x}}$ → Light path, set of ordered vertices on surfaces
- \mathbb{P} → Space of valid paths
- $f(\bar{\mathbf{x}})$ → Path contribution, includes geometric terms (visibility, fall-off) & local terms (BRDF, foreshortening, emission)

Monte Carlo rendering: approximating path integrals

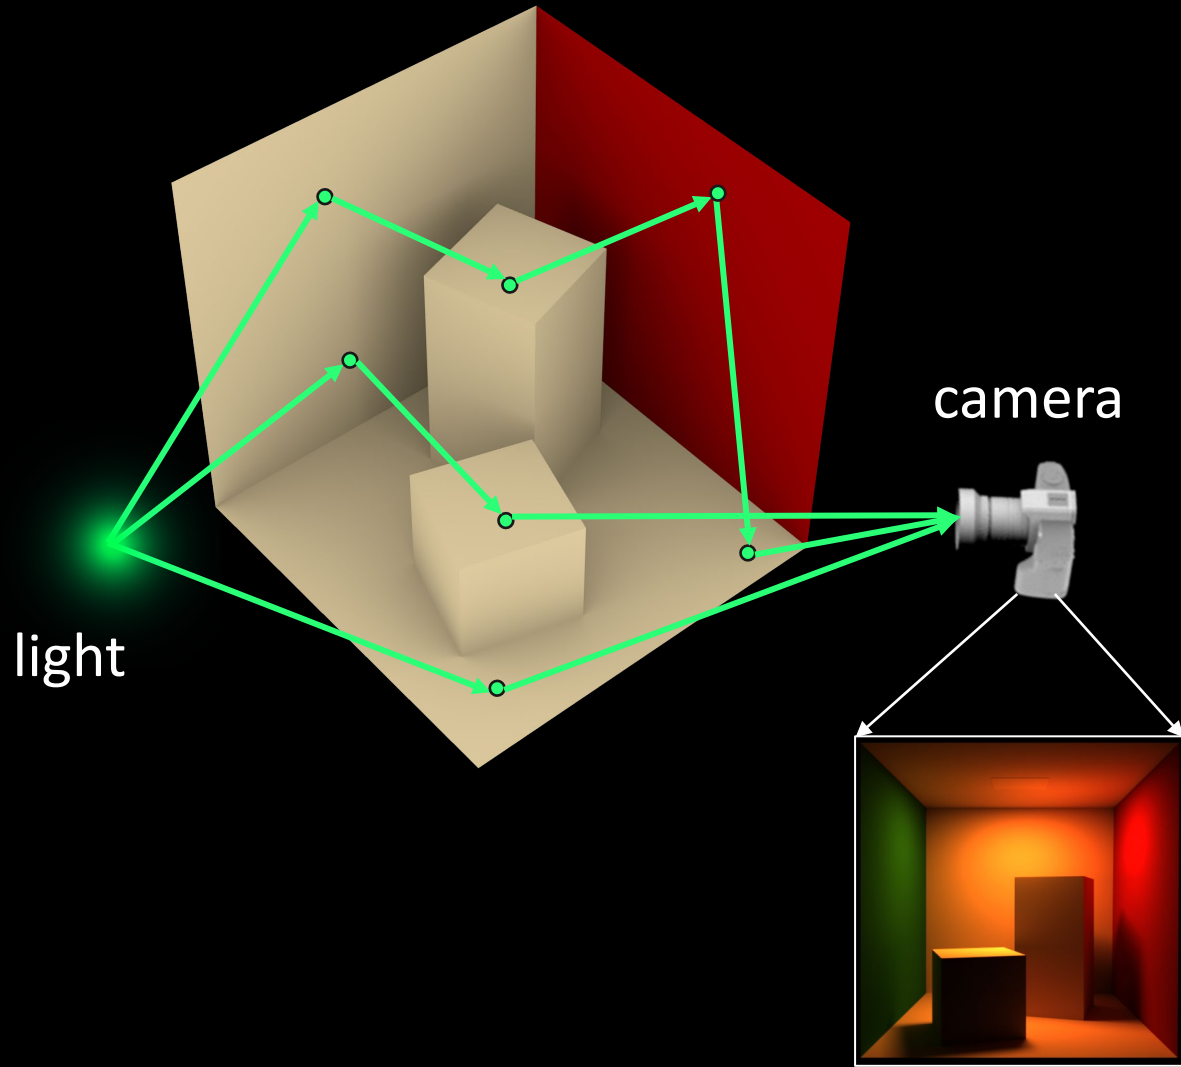


$$I(\pi) \approx \underbrace{\sum_{i=1}^N \frac{f(\bar{\mathbf{x}}_i; \pi)}{p(\bar{\mathbf{x}}_i; \pi)}}_{MC(\pi)}$$

$\bar{\mathbf{x}}_i$ → Randomly sampled light paths

$p(\bar{\mathbf{x}}_i)$ → Probability of sampling a path


Algorithms such as path tracing, bidirectional path tracing, etc. sample paths.

How can we approximate the derivative of the image?

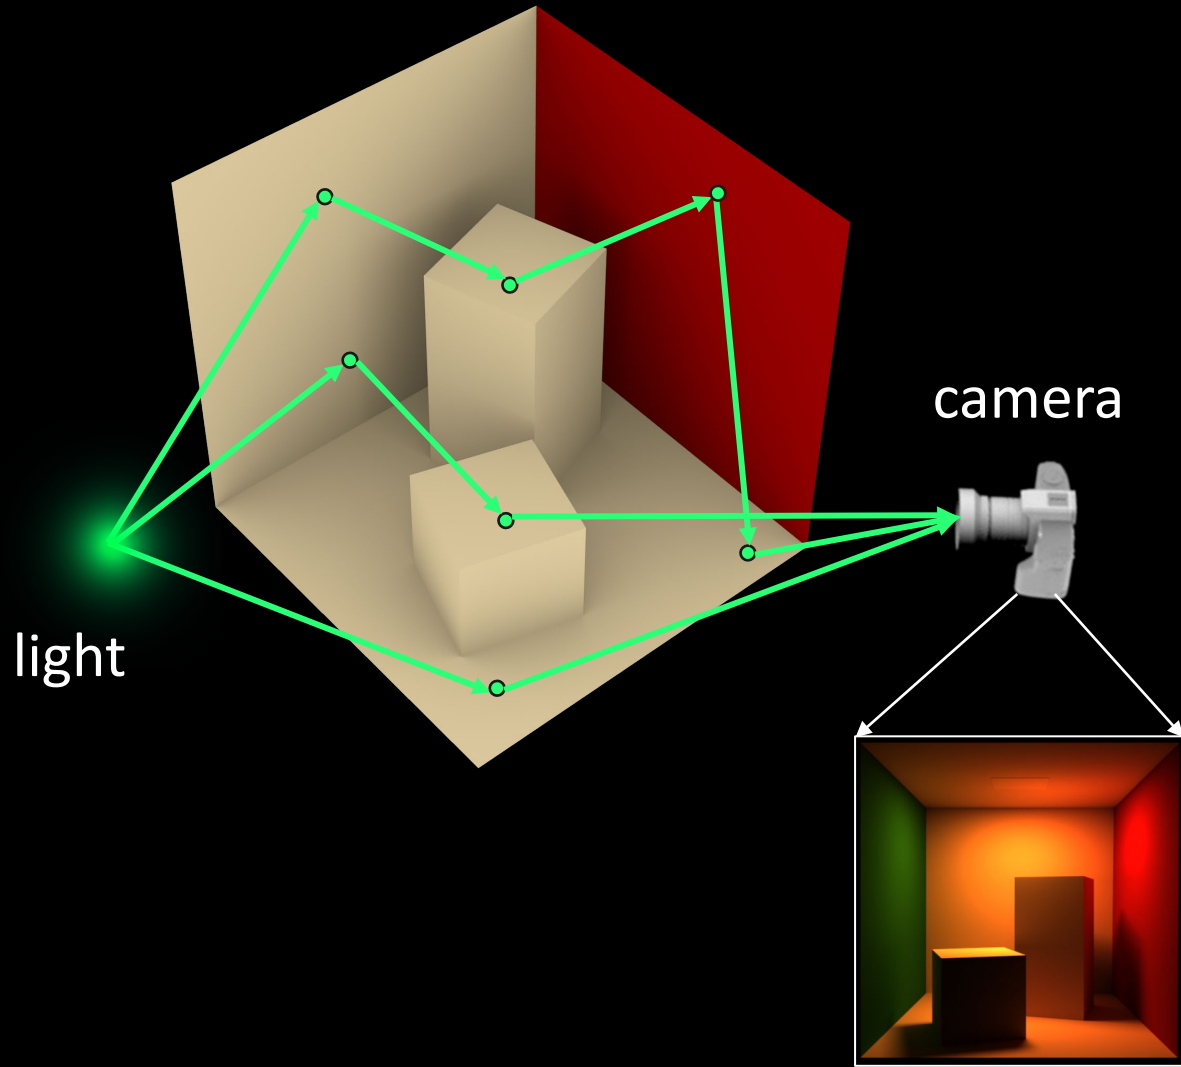

$$\frac{\partial I}{\partial \pi}(\pi) \approx ?$$

Easy approach 1: finite differences

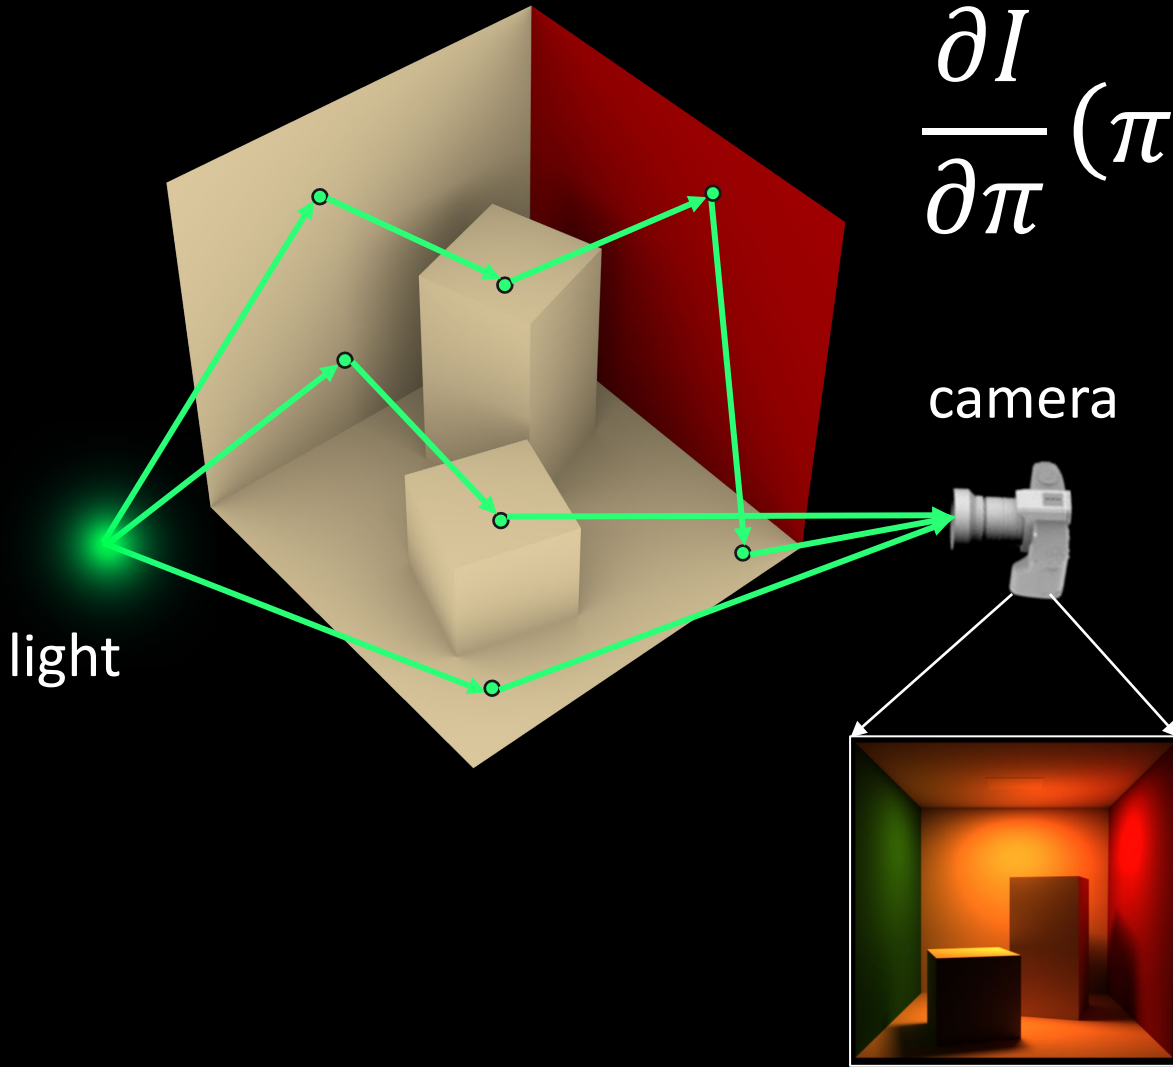


$$\frac{\partial I}{\partial \pi}(\pi) \approx \frac{MC(\pi + \varepsilon) - MC(\pi - \varepsilon)}{2\varepsilon}$$

Any issues with this?

- Incredibly noisy for small ε
- Very inaccurate for large ε
- Techniques for noise reduction exist, but generally impractical approach

Easy approach 2: automatic differentiation

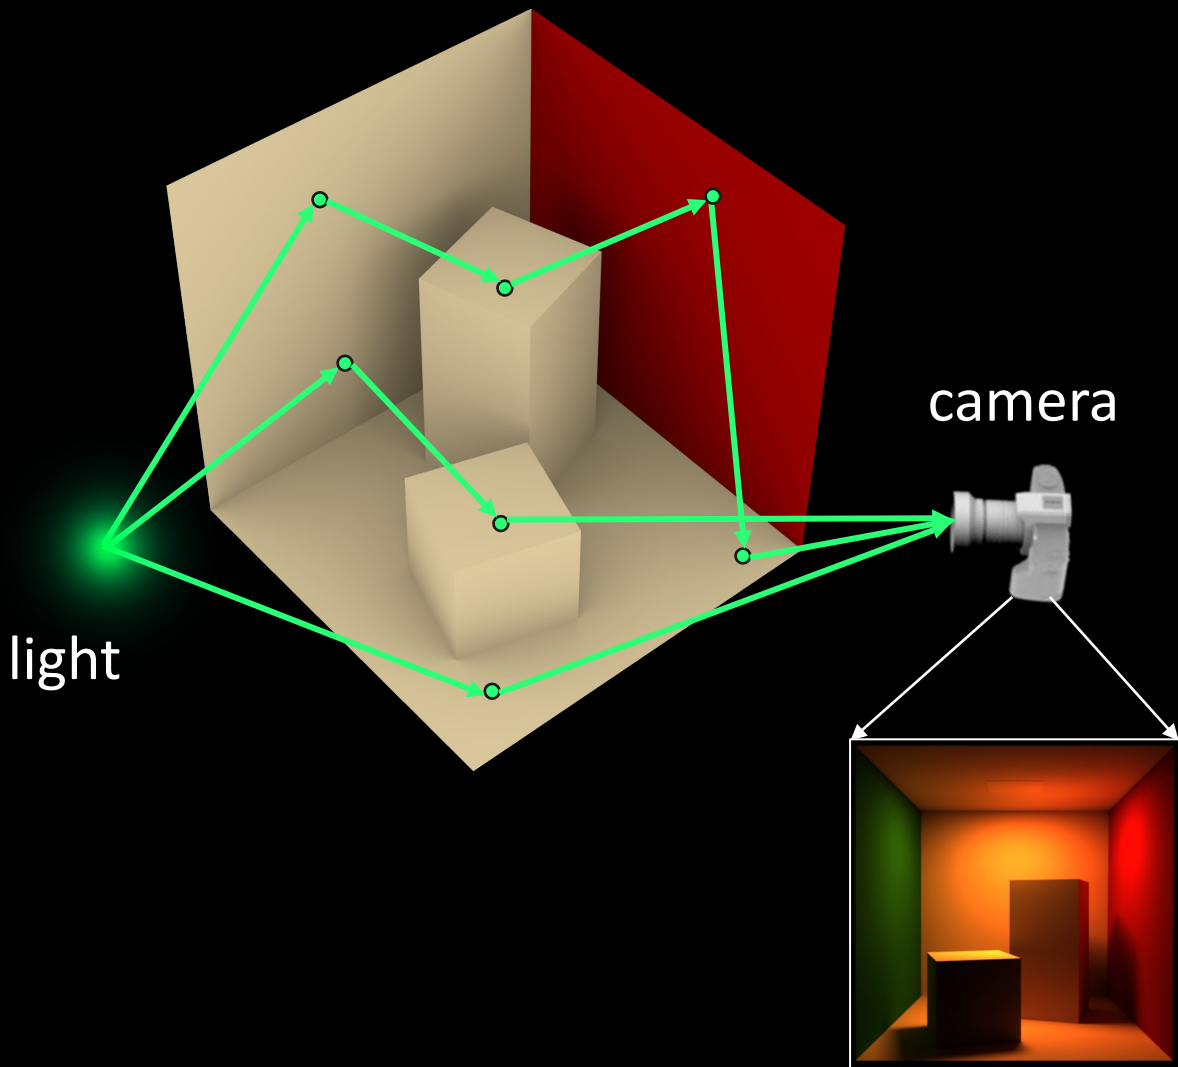


$$\frac{\partial I}{\partial \pi}(\pi) \approx \text{autodiff}(MC(\pi))$$

Any issues with this?

- Many path sampling techniques are not differentiable
- High variance (consider $f(x;\pi) = \text{constant}$)
- Rendering produces enormous, non-local computational graphs.

DIFFERENTIATING GLOBAL ILLUMINATION WITH RESPECT TO LOCAL PARAMETERS

Images as path integrals

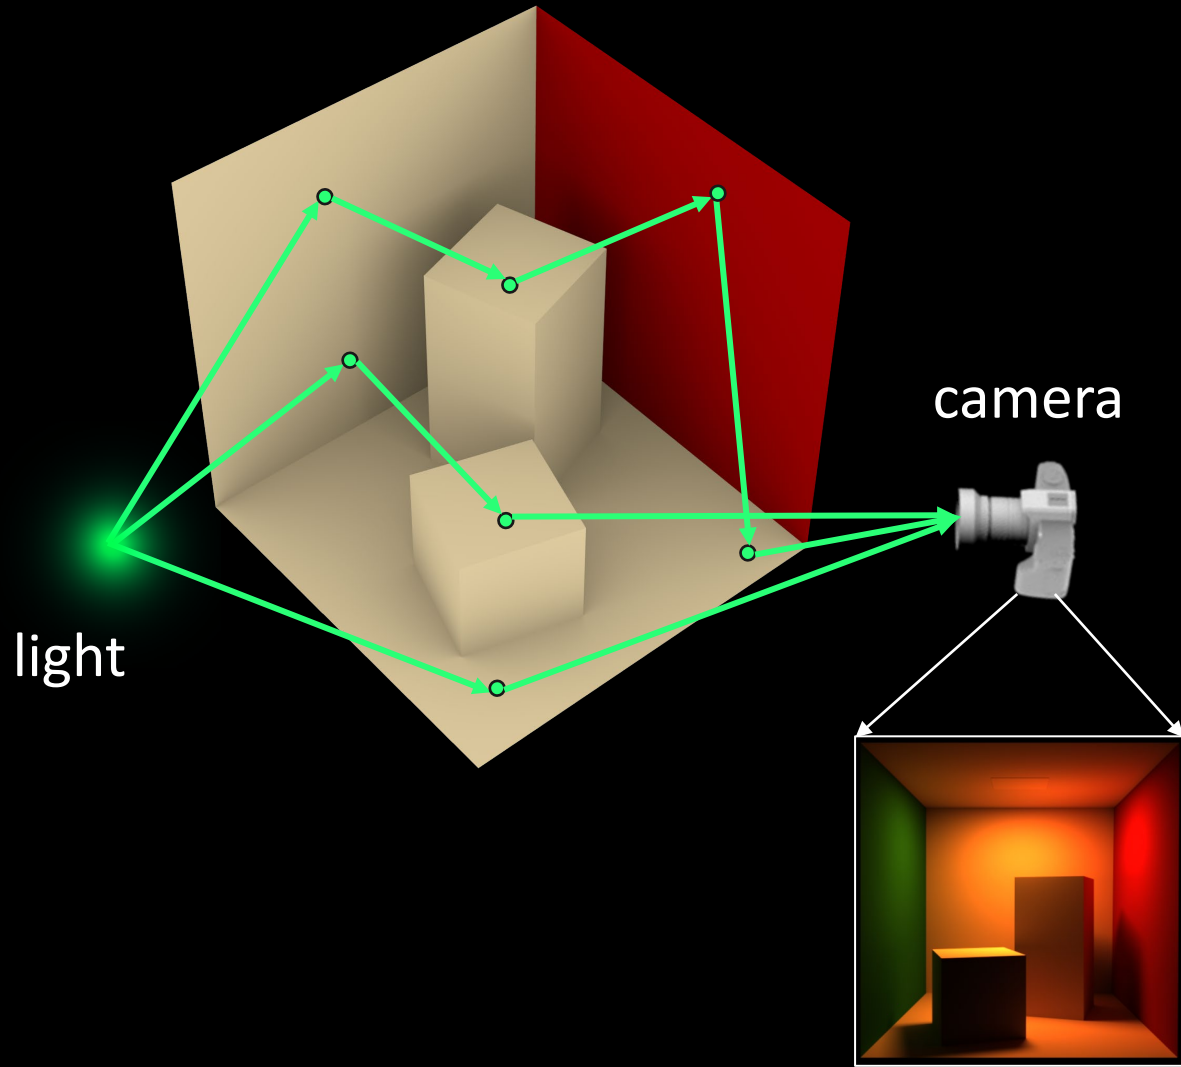


$$I(\pi) = \int_{\mathbb{P}} f(\bar{\mathbf{x}}; \pi) d\bar{\mathbf{x}}$$

- $\bar{\mathbf{x}}$ → Light path, set of ordered vertices on surfaces
- \mathbb{P} → Space of valid paths
- $f(\bar{\mathbf{x}})$ → Path contribution, includes geometric terms (visibility, fall-off) & local terms (BRDF, foreshortening, emission)

Assume \mathbb{P} is independent of π

Derivatives of images as path integrals

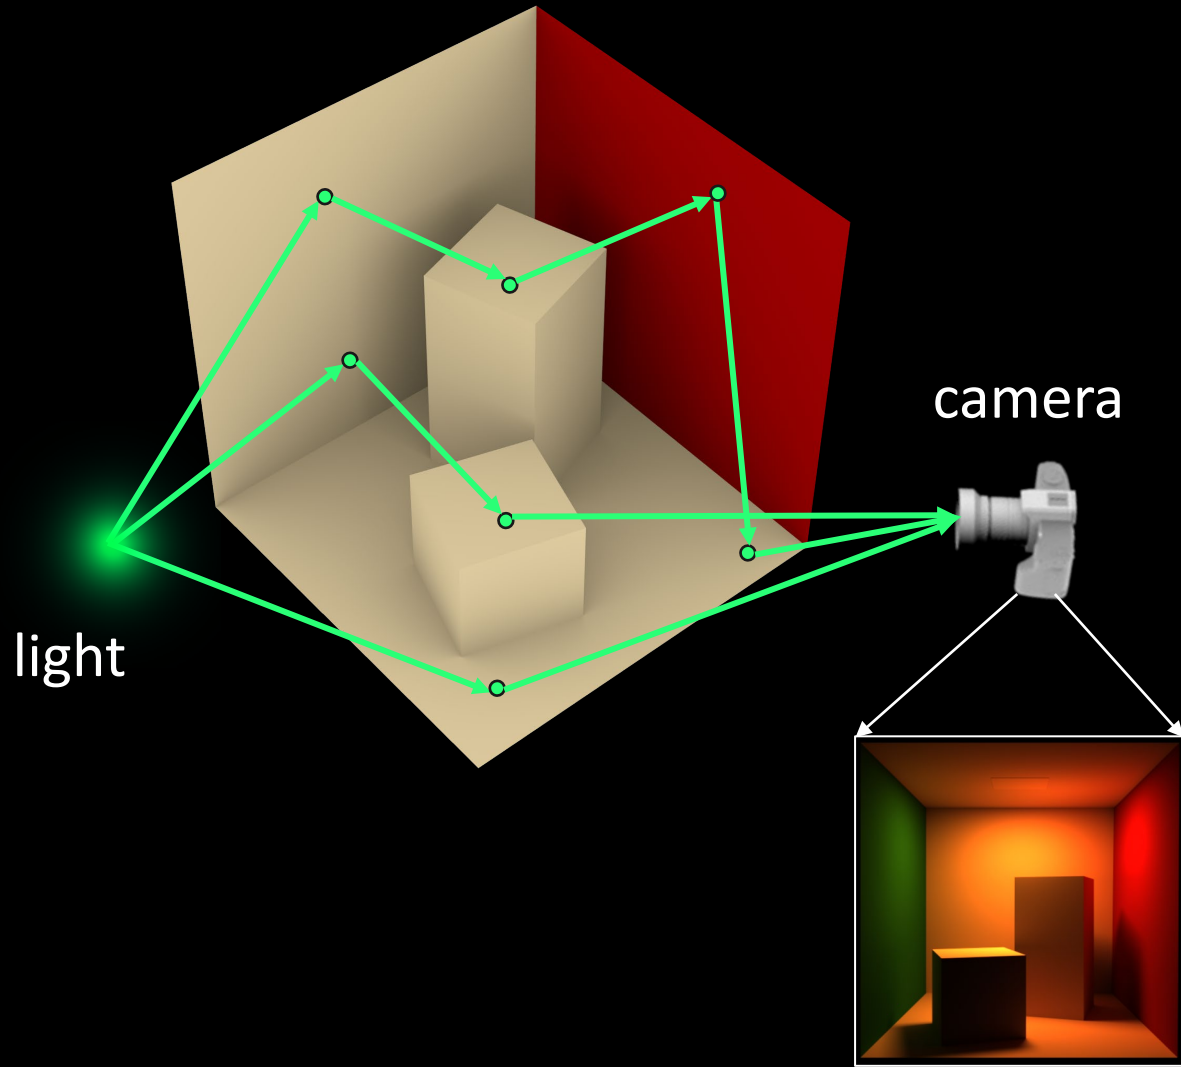


$$\frac{\partial I}{\partial \pi}(\pi) = ?$$

- \bar{x} → Light path, set of ordered vertices on surfaces
- \mathbb{P} → Space of valid paths
- $f(\bar{x})$ → Path contribution, includes geometric terms (visibility, fall-off) & local terms (BRDF, foreshortening, emission)

Assume \mathbb{P} is independent of π

Derivatives of images as path integrals

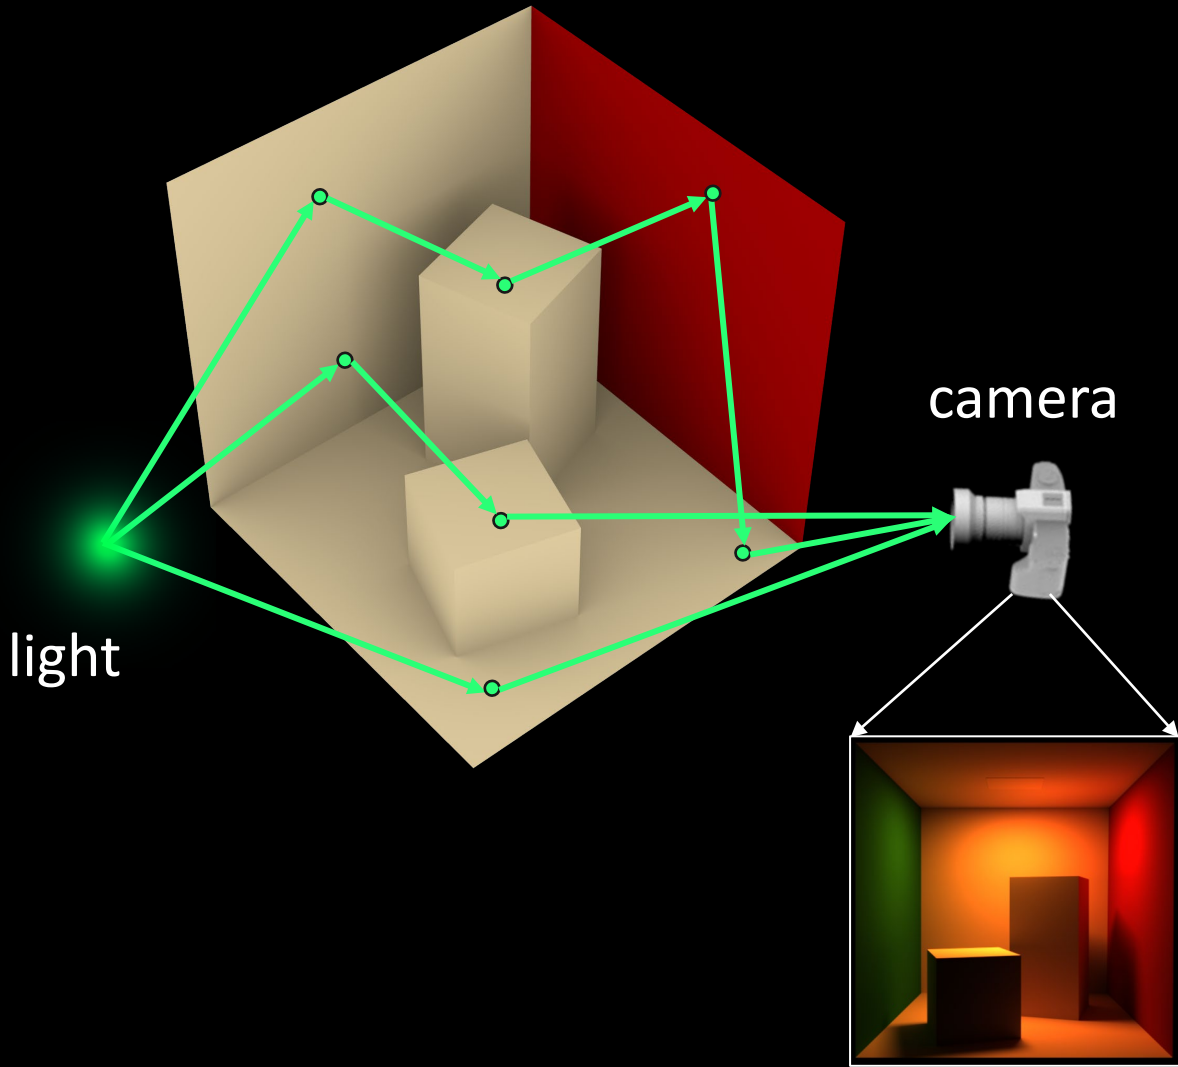

$$\frac{\partial I}{\partial \pi}(\pi) = \int_{\mathbb{P}} \frac{\partial f}{\partial \pi}(\bar{\mathbf{x}}; \pi) d\bar{\mathbf{x}}$$


differentiation under the integral sign

- $\bar{\mathbf{x}}$ → Light path, set of ordered vertices on surfaces
- \mathbb{P} → Space of valid paths
- $f(\bar{\mathbf{x}})$ → Path contribution, includes geometric terms (visibility, fall-off) & local terms (BRDF, foreshortening, emission)

Assume \mathbb{P} is independent of π

Monte Carlo differentiable rendering (for local parameters)

This term is generally easy to compute during path tracing

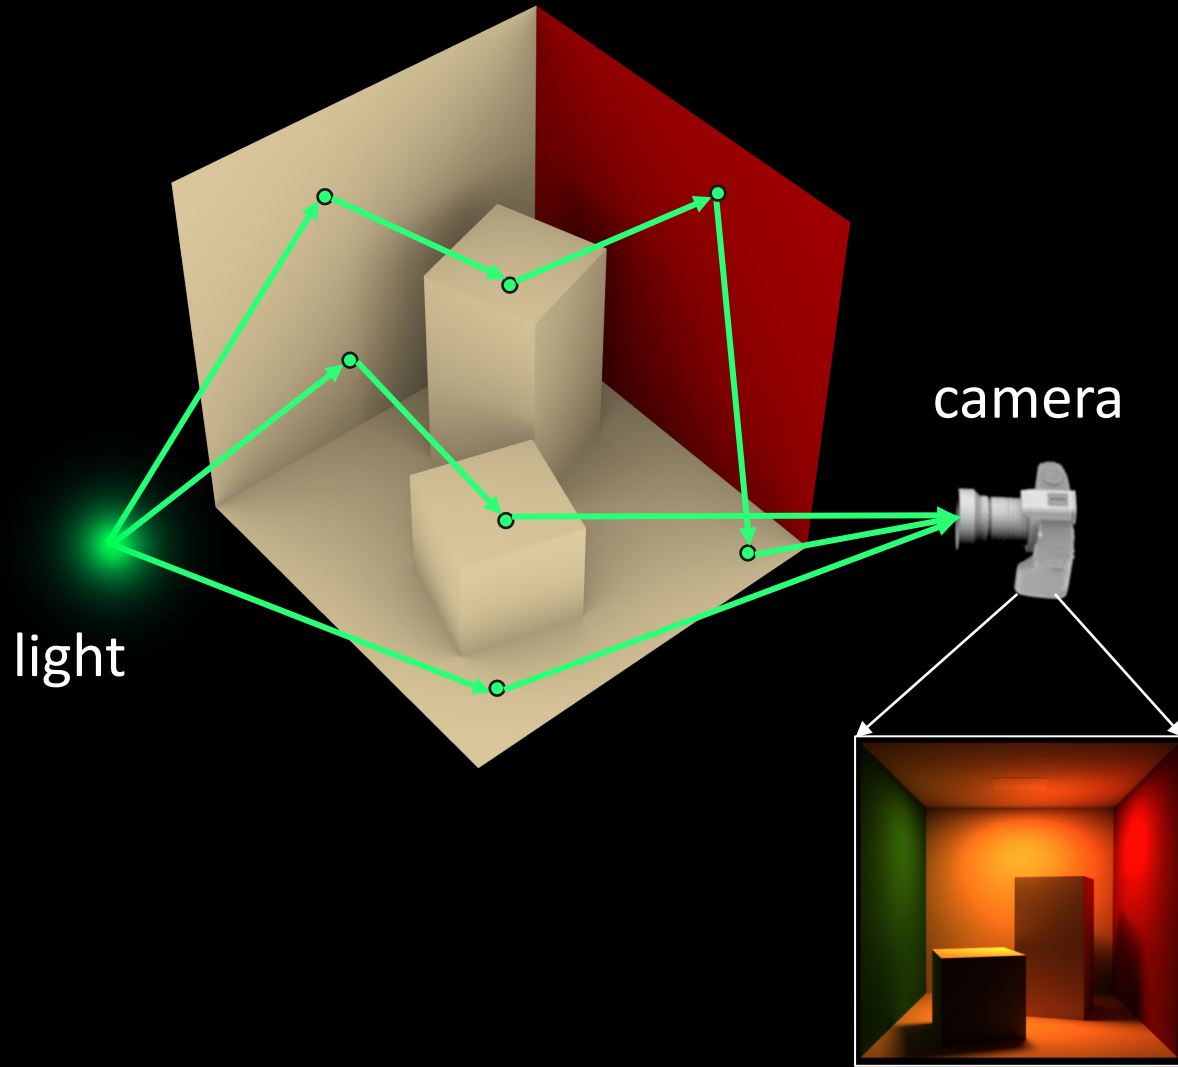

$$\frac{\partial I}{\partial \pi}(\pi) \approx \sum_{i=1}^N \frac{\partial f}{\partial \pi}(\bar{\mathbf{x}}_i; \pi)$$

$\bar{\mathbf{x}}_i$ → Randomly sampled light paths

$p(\bar{\mathbf{x}}_i)$ → Probability of sampling a path

Sample paths using path tracing etc.

Score estimator

$$f(\bar{\mathbf{x}}; \pi) = \prod_{b=1}^B f_s(x_{b-1} \rightarrow x_b \rightarrow x_{b+1}; \pi) \frac{V(x_{b-1} \leftrightarrow x_b)}{\|x_{b-1} - x_b\|^2}$$

Foreshortening terms are included in the BRDF

$$\frac{\partial f}{\partial \pi}(\bar{\mathbf{x}}; \pi) = \prod_{b=1}^B f_s(x_{b-1} \rightarrow x_b \rightarrow x_{b+1}; \pi) \frac{V(x_{b-1} \leftrightarrow x_b)}{\|x_{b-1} - x_b\|^2}$$

$$\sum_{b=1}^B \frac{\frac{\partial f_s}{\partial \pi}(x_{b-1} \rightarrow x_b \rightarrow x_{b+1}; \pi)}{f_s(x_{b-1} \rightarrow x_b \rightarrow x_{b+1}; \pi)}$$


Score function of f_s

At each path vertex:

- Update product throughput using f_s
- Update score sum using gradient of f_s

Multiply the two at end of path


Even simpler: use autodiff

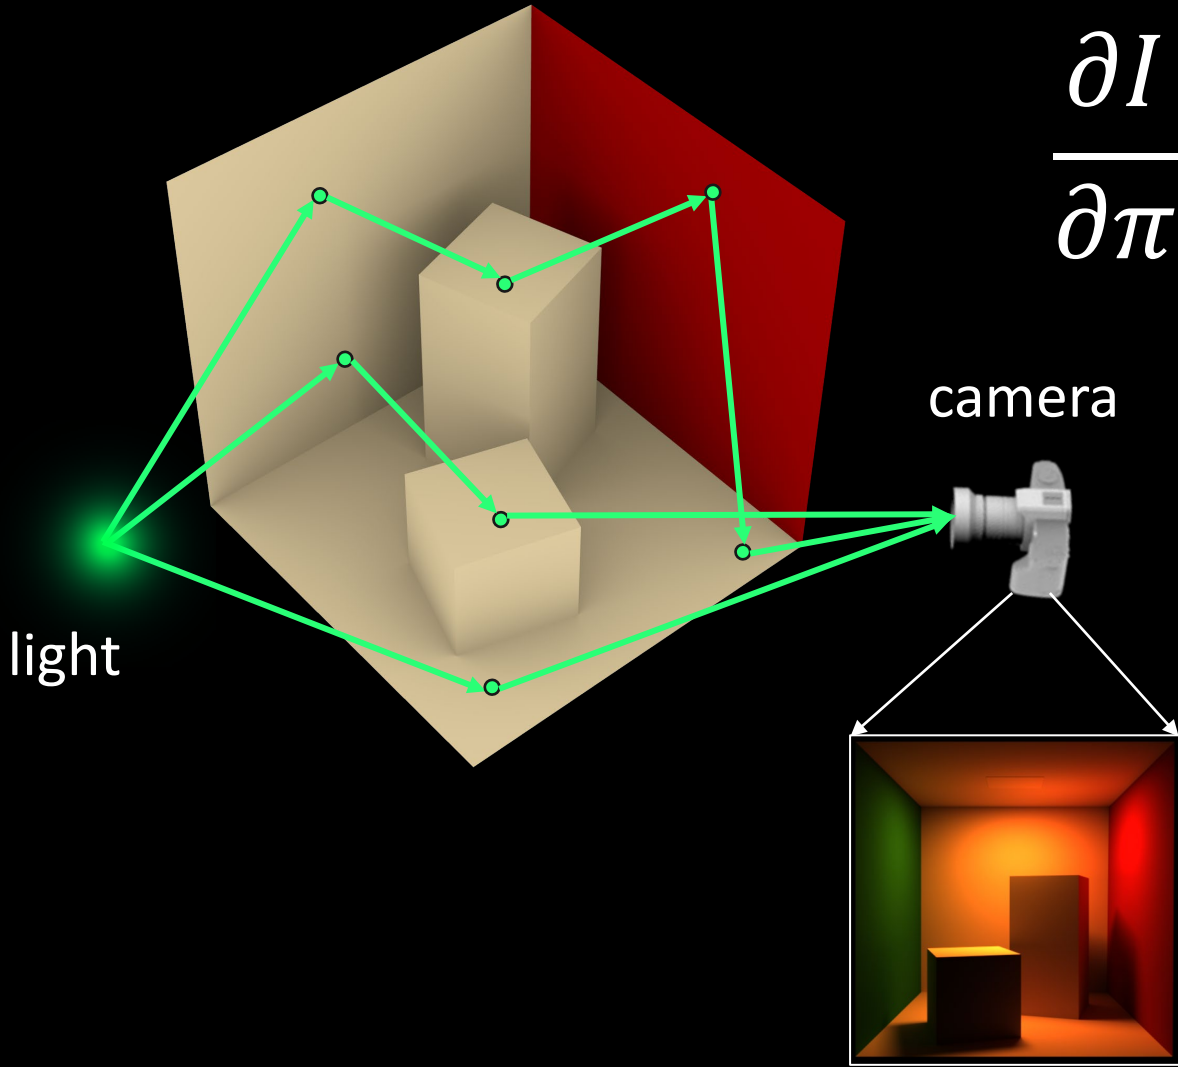

$$\frac{\partial I}{\partial \pi}(\pi) \approx \sum_{i=1}^N \frac{\text{autodiff}(f(\bar{\mathbf{x}}_i; \pi))}{p(\bar{\mathbf{x}}_i; \pi)}$$

- $\bar{\mathbf{x}}_i$ → Randomly sampled light paths
- $p(\bar{\mathbf{x}}_i)$ → Probability of sampling a path

Compare with...

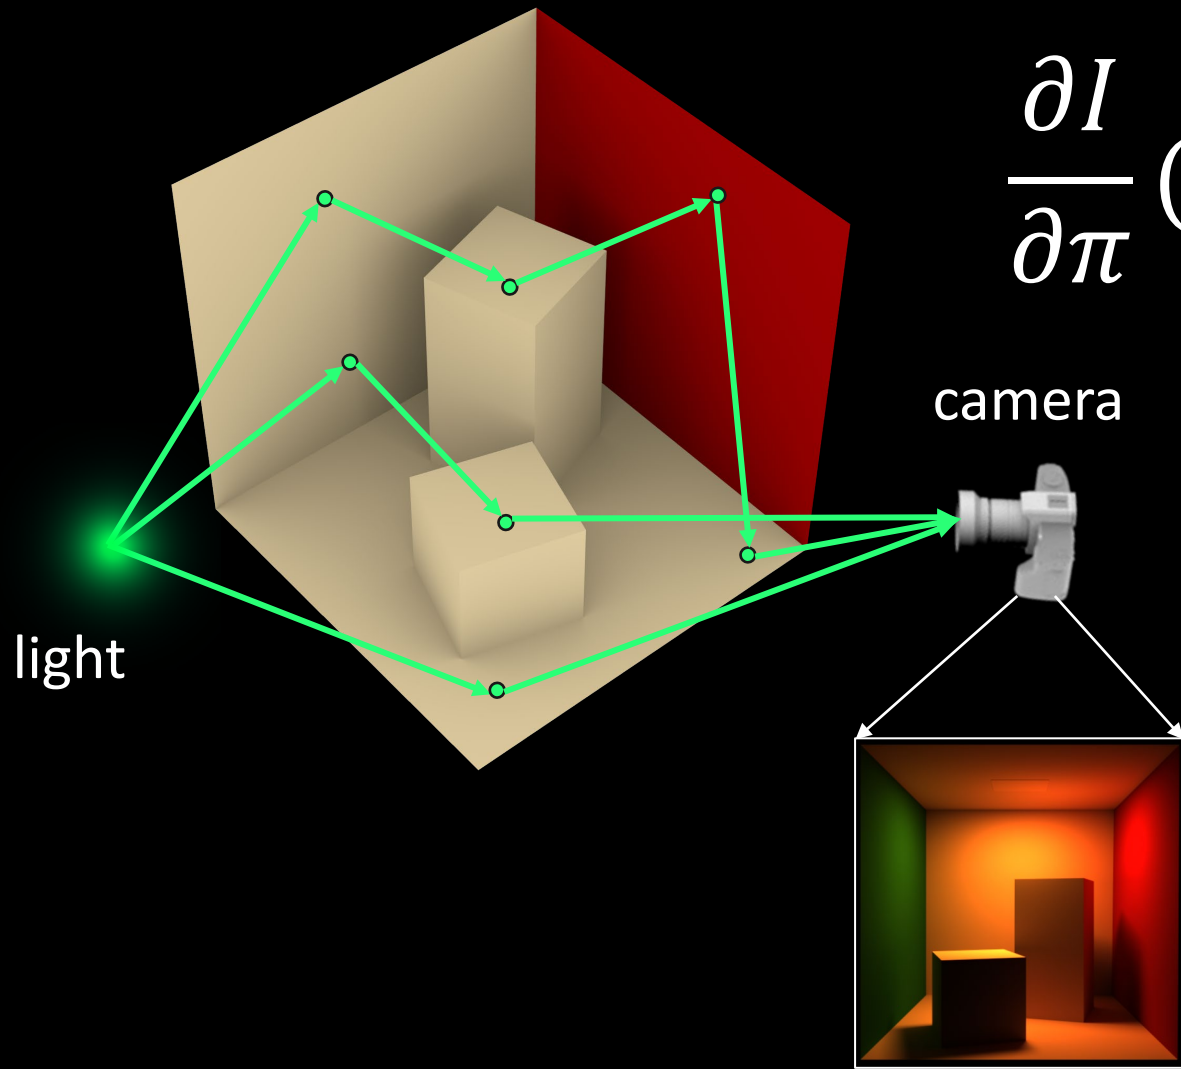


$$\frac{\partial I}{\partial \pi}(\pi) \approx \text{autodiff} \left(\sum_{i=1}^N \frac{f(\bar{\mathbf{x}}_i; \pi)}{p(\bar{\mathbf{x}}_i; \pi)} \right)$$

$\bar{\mathbf{x}}_i$ → Randomly sampled light paths

$p(\bar{\mathbf{x}}_i)$ → Probability of sampling a path

Even simpler: use autodiff

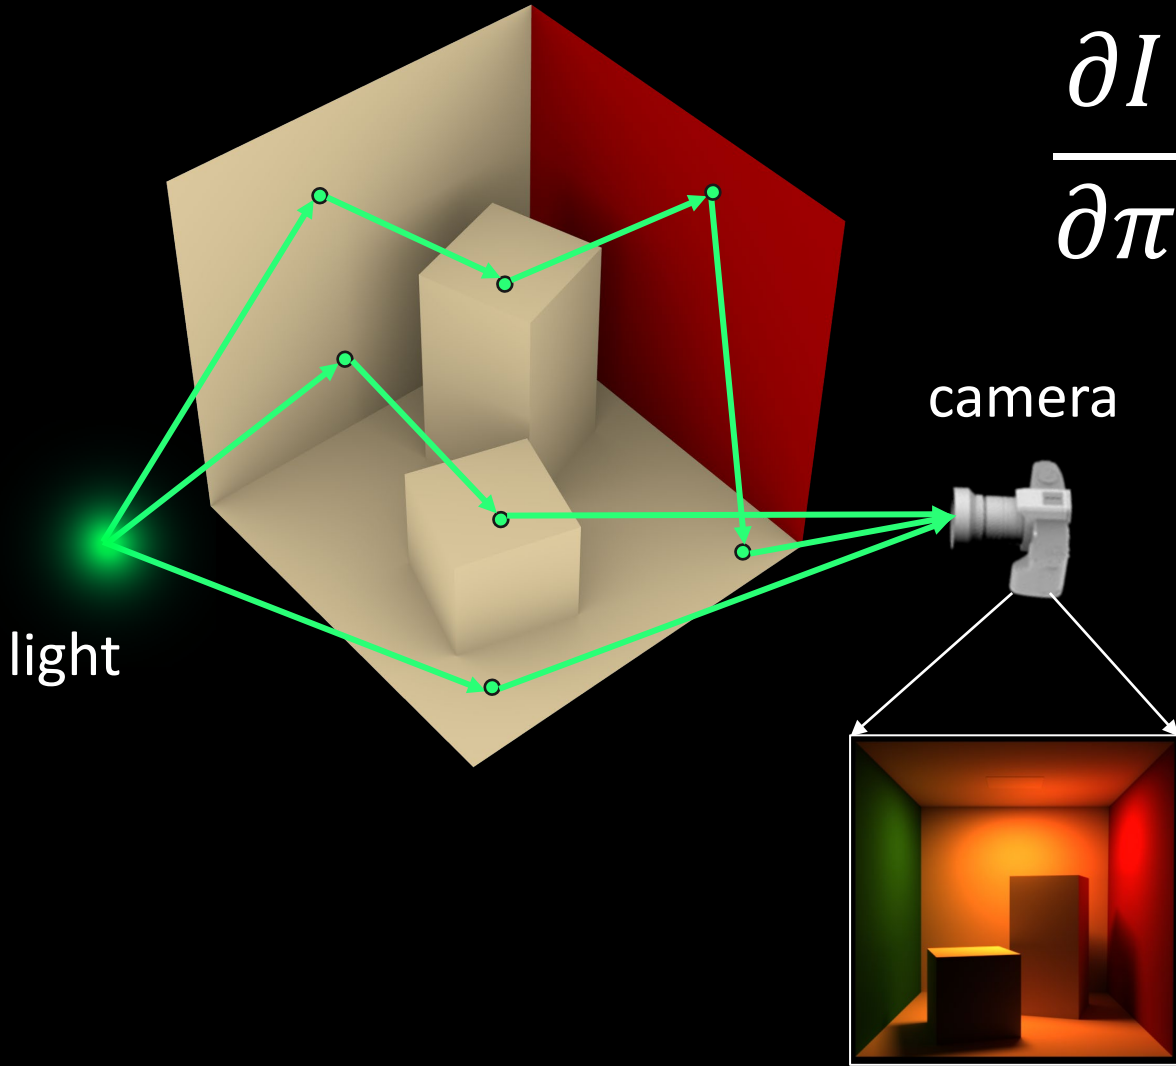

$$\frac{\partial I}{\partial \pi}(\pi) \approx \sum_{i=1}^N \frac{\text{autodiff}(f(\bar{\mathbf{x}}_i; \pi))}{p(\bar{\mathbf{x}}_i; \pi)}$$

- Depending on how badly p approximates f , can have much lower variance.
- Remember: *Compute an estimate of the derivative, not a derivative of the estimator.*

OpenDR: An Approximate Differentiable Renderer

[Loper and Black 2015]

- Approach: autodiff of the entire renderer.
- Only direct illumination.
- Only shading parameters (normals, reflectance).

Abstract. Inverse graphics attempts to take sensor data and infer 3D geometry, illumination, materials, and motions such that a graphics renderer could realistically reproduce the observed scene. Renderers, however, are designed to solve the forward process of image synthesis. To go in the other direction, we propose an approximate *differentiable renderer (DR)* that explicitly models the relationship between changes in model parameters and image observations. We describe a publicly available *OpenDR* framework that makes it easy to express a forward graphics model and then automatically obtain derivatives with respect to the model parameters and to optimize over them. Built on a new auto-differentiation package and OpenGL, OpenDR provides a local optimization method that can be incorporated into probabilistic programming frameworks. We demonstrate the power and simplicity of programming with OpenDR by using it to solve the problem of estimating human body shape from Kinect depth and RGB data.


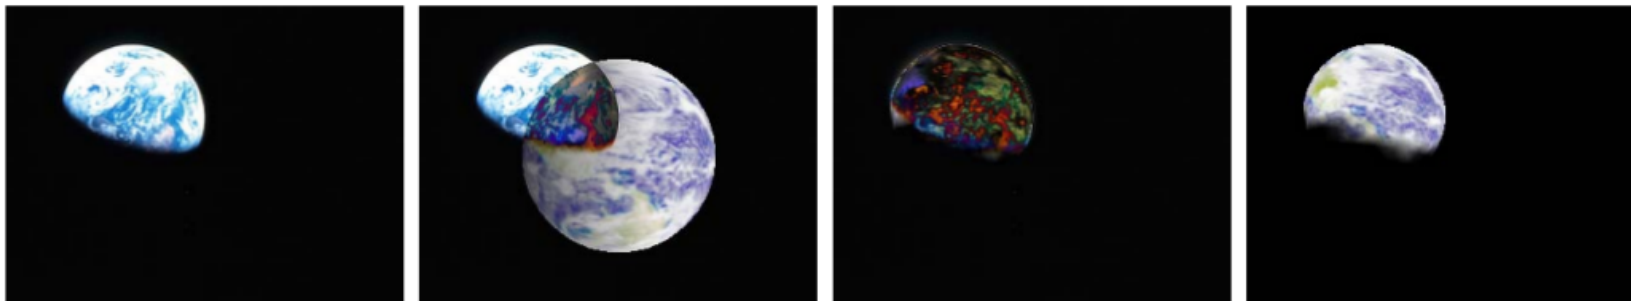


Fig. 4. Illustration of optimization in Figure 3. In order: observed image of earth, initial absolute difference between the rendered and observed image intensities, final difference, final result.

Compute an estimate of the derivative





derivative wrt volumetric density

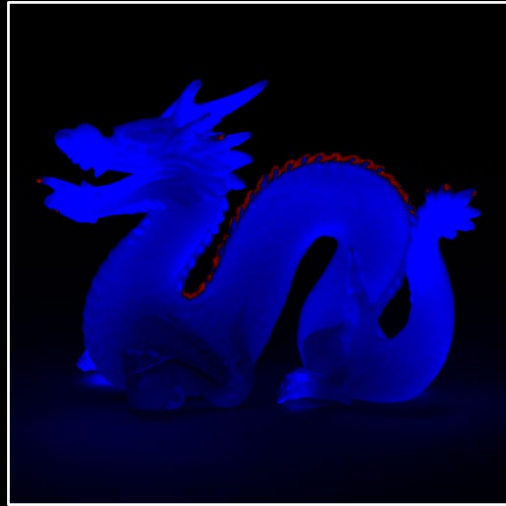

derivative wrt BRDF


Inverse Transport Networks

Chengqian Che Carnegie Mellon University	Fujun Luan Cornell University	Shuang Zhao University of California, Irvine
Kavita Bala Cornell University	Ioannis Gkioulekas Carnegie Mellon University	

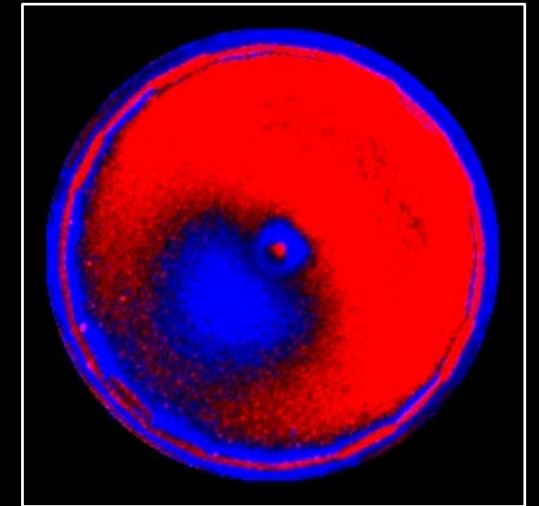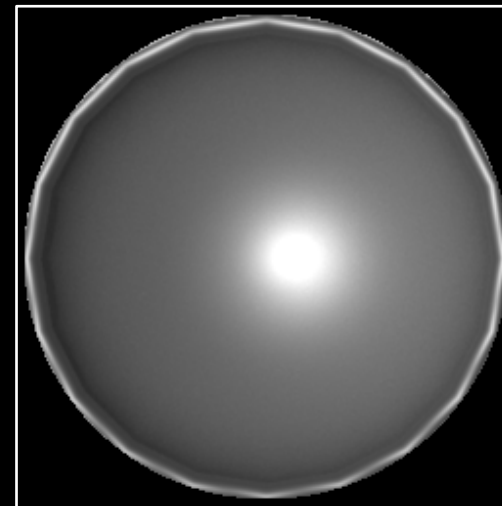


derivative wrt normal

Comparison with finite differences

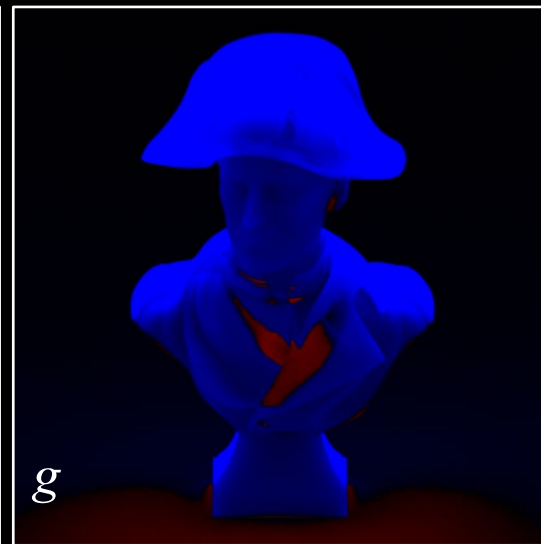

rendered

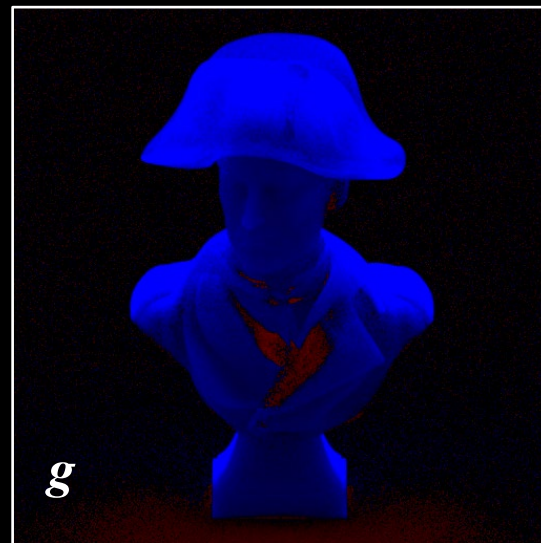

finite differences

Note: Finite differences are great for testing the correctness of your gradient code.

Compute a derivative of the estimate



Mitsuba 2: A Retargetable Forward and Inverse Renderer

MERLIN NIMIER-DAVID*, École Polytechnique Fédérale de Lausanne

DELIO VICINI*, École Polytechnique Fédérale de Lausanne


TIZIAN ZELTNER, École Polytechnique Fédérale de Lausanne

WENZEL JAKOB, École Polytechnique Fédérale de Lausanne

- A lot more general.
- GPU implementation.

derivative wrt volumetric density

Derivatives of images as path integrals

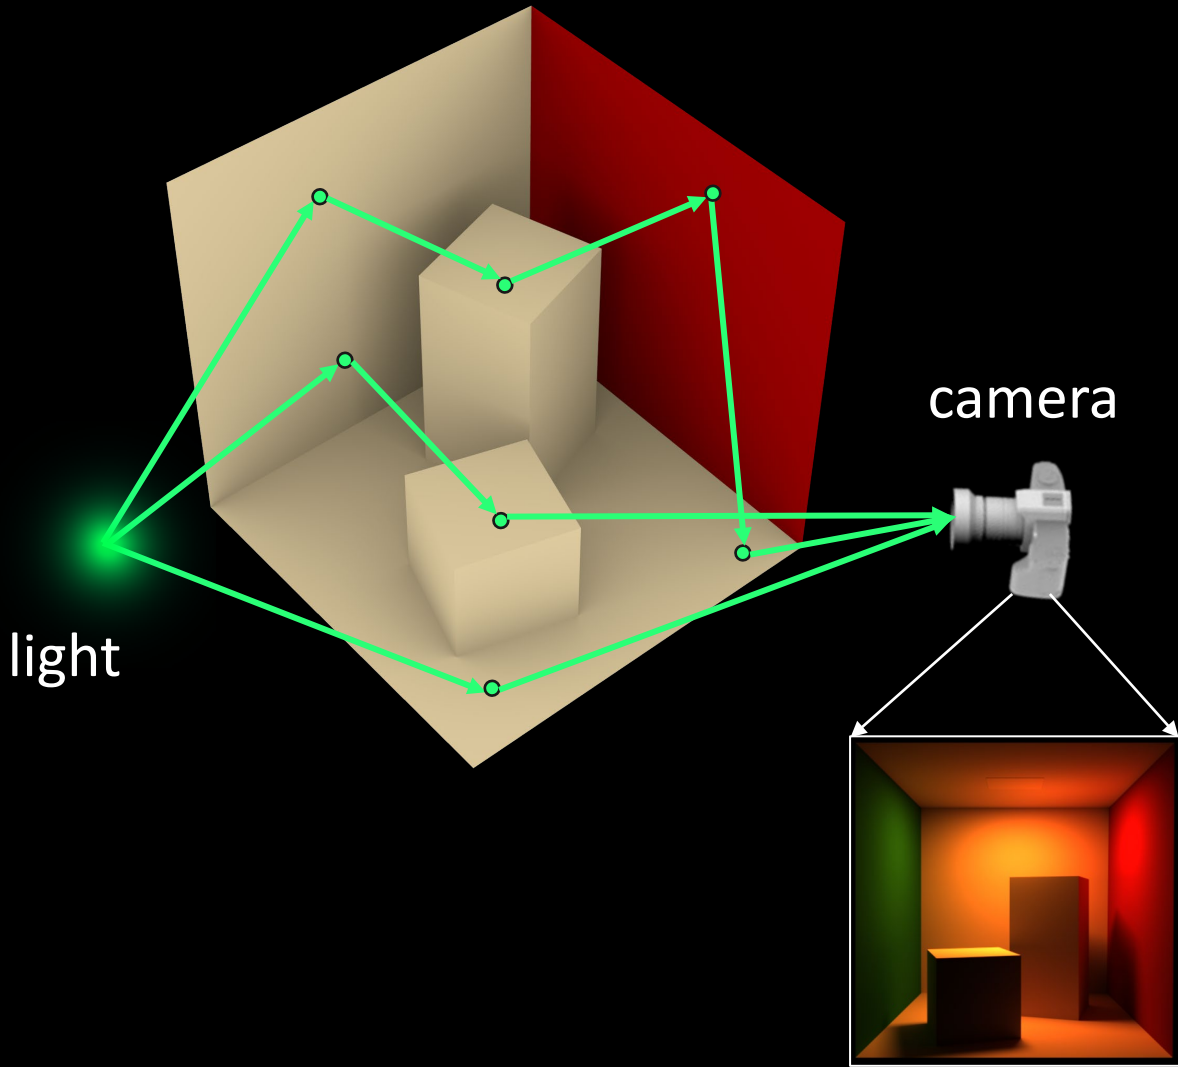


$$\frac{\partial I}{\partial \pi}(\pi) = \int_{\mathbb{P}} \frac{\partial f}{\partial \pi}(\bar{\mathbf{x}}; \pi) d\bar{\mathbf{x}}$$

differentiation under the integral sign

- $\bar{\mathbf{x}}$ → Light path, set of ordered vertices on surfaces
- \mathbb{P} → Space of valid paths
- $f(\bar{\mathbf{x}})$ → Path contribution, includes geometric terms (visibility, fall-off) & local terms (BRDF, foreshortening, emission)

Assume \mathbb{P} is independent of π

Derivatives of images as path integrals

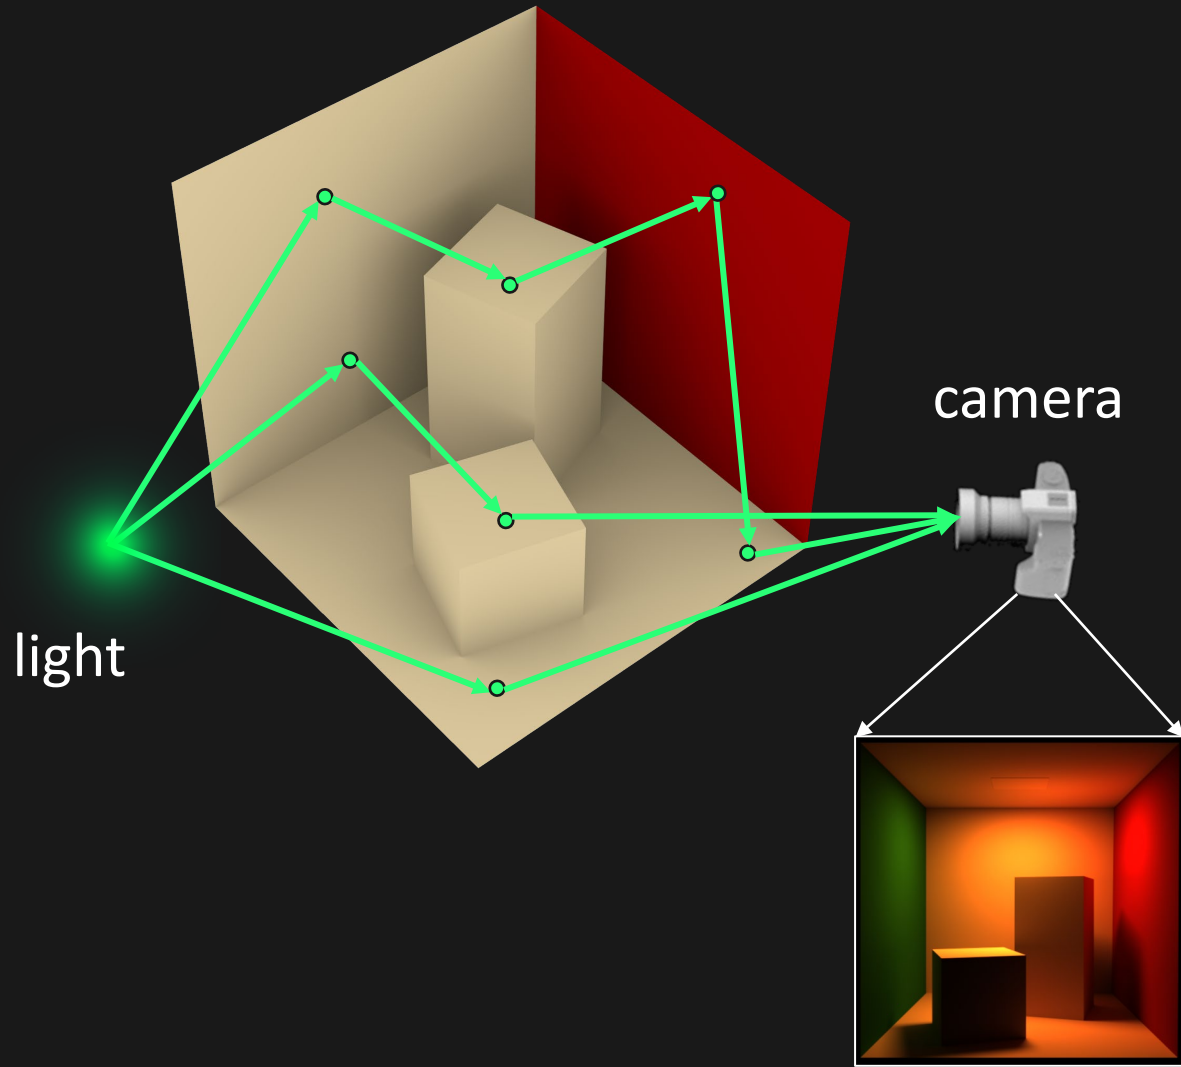

$$\frac{\partial I}{\partial \pi}(\pi) = \int_{\mathbb{P}} \frac{\partial f}{\partial \pi}(\bar{\mathbf{x}}; \pi) d\bar{\mathbf{x}}$$

differentiation under the integral sign

What about parameters π that change \mathbb{P} ?

- Location, pose, and shape of light, camera, and scene objects.

DIFFERENTIATING GLOBAL ILLUMINATION WITH RESPECT TO GLOBAL PARAMETERS

We'll work with the rendering equation for a few


$$L(x, \omega; \pi) = \int_{G(\pi)} L(x' \rightarrow x; \pi) f(x' \rightarrow x, \omega; \pi) V(x' \leftrightarrow x; \pi) dA(x')$$

$L \rightarrow$ Radiance at a point and direction

$G \rightarrow$ All surfaces in the scene

$f \rightarrow$ Reflection, foreshortening, and fall-off

$V \rightarrow$ Visibility

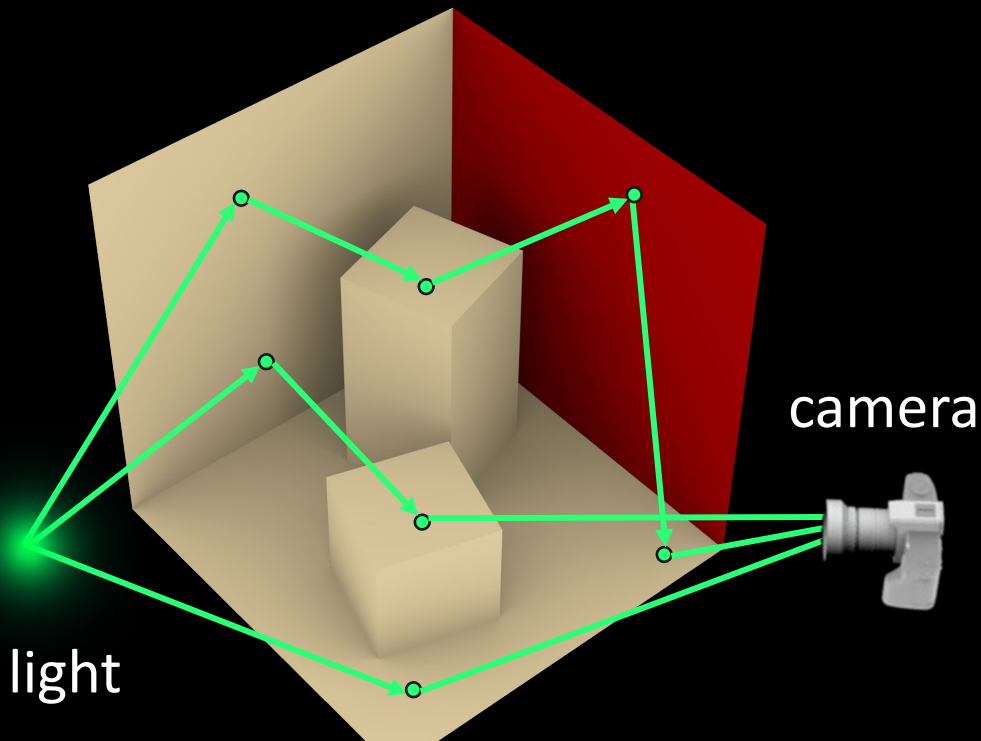


Let's slightly rewrite the rendering equation

$$L(x, \omega; \pi) = \int_{V(x, \pi)} L(x' \rightarrow x; \pi) f(x' \rightarrow x, \omega; \pi) dA(x')$$

$L \rightarrow$ Radiance at a point and direction

$V \rightarrow$ All visible surfaces in the scene

$f \rightarrow$ Reflection, foreshortening, and fall-off

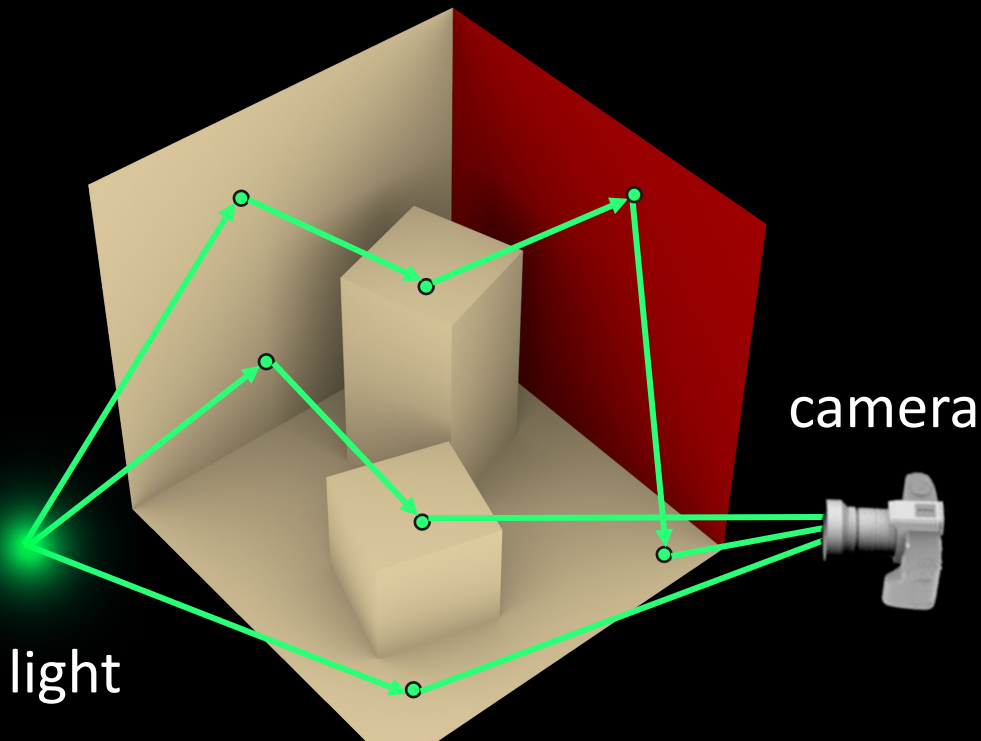

Let's differentiate it


$$\frac{\partial}{\partial \pi} L(x, \omega; \pi) = \frac{\partial}{\partial \pi} \int_{V(x, \pi)} L(x' \rightarrow x; \pi) f(x' \rightarrow x, \omega; \pi) dA(x')$$

$L \rightarrow$ Radiance at a point and direction

$V \rightarrow$ All visible surfaces in the scene

$f \rightarrow$ Reflection, foreshortening, and fall-off

Can we just move the integral inside?

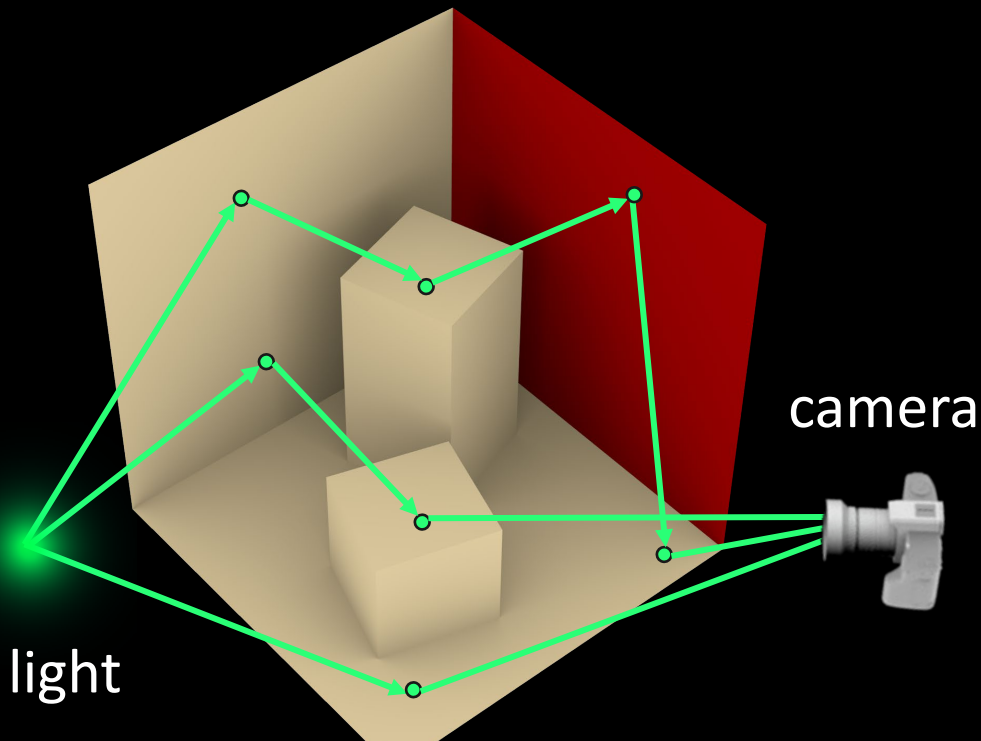

Let's differentiate it

$$\frac{\partial}{\partial \pi} L(x, \omega; \pi) = \frac{\partial}{\partial \pi} \int_{V(x, \pi)} L(x' \rightarrow x; \pi) f(x' \rightarrow x, \omega; \pi) dA(x')$$


$L \rightarrow$ Radiance at a point and direction

$V \rightarrow$ All visible surfaces in the scene

$f \rightarrow$ Reflection, foreshortening, and fall-off

Can we just move the integral inside?

- No. What can we do?

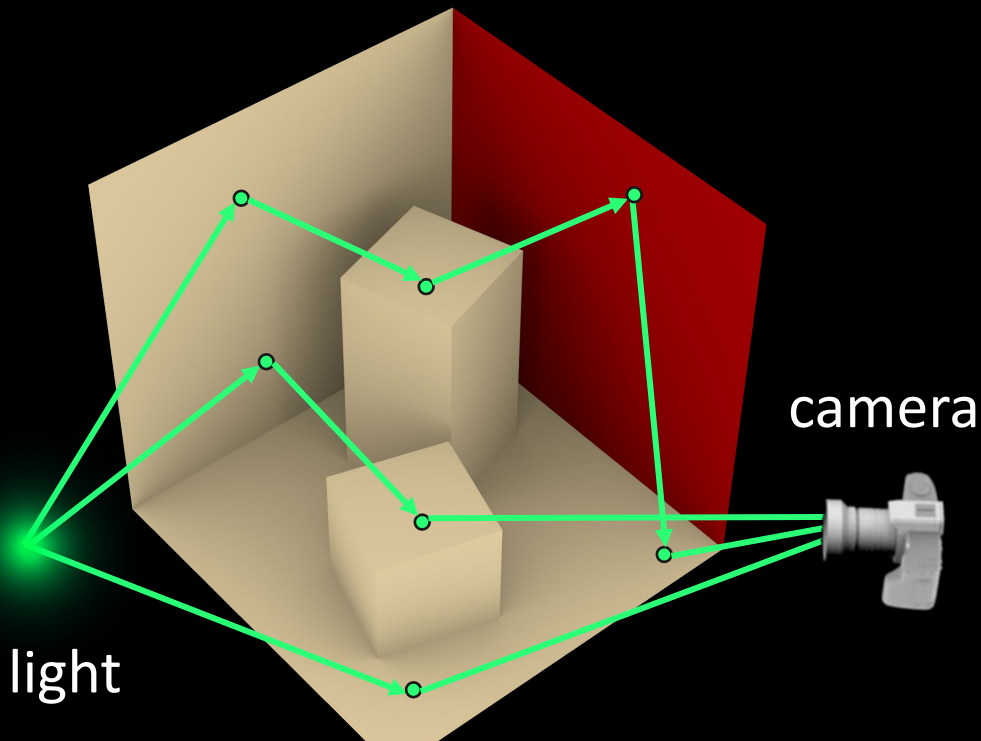


Let's differentiate it

$$\frac{\partial}{\partial \pi} L(x, \omega; \pi) = \frac{\partial}{\partial \pi} \int_{V(x, \pi)} L(x' \rightarrow x; \pi) f(x' \rightarrow x, \omega; \pi) dA(x')$$

$L \rightarrow$ Radiance at a point and direction

$V \rightarrow$ All visible surfaces in the scene

$f \rightarrow$ Reflection, foreshortening, and fall-off

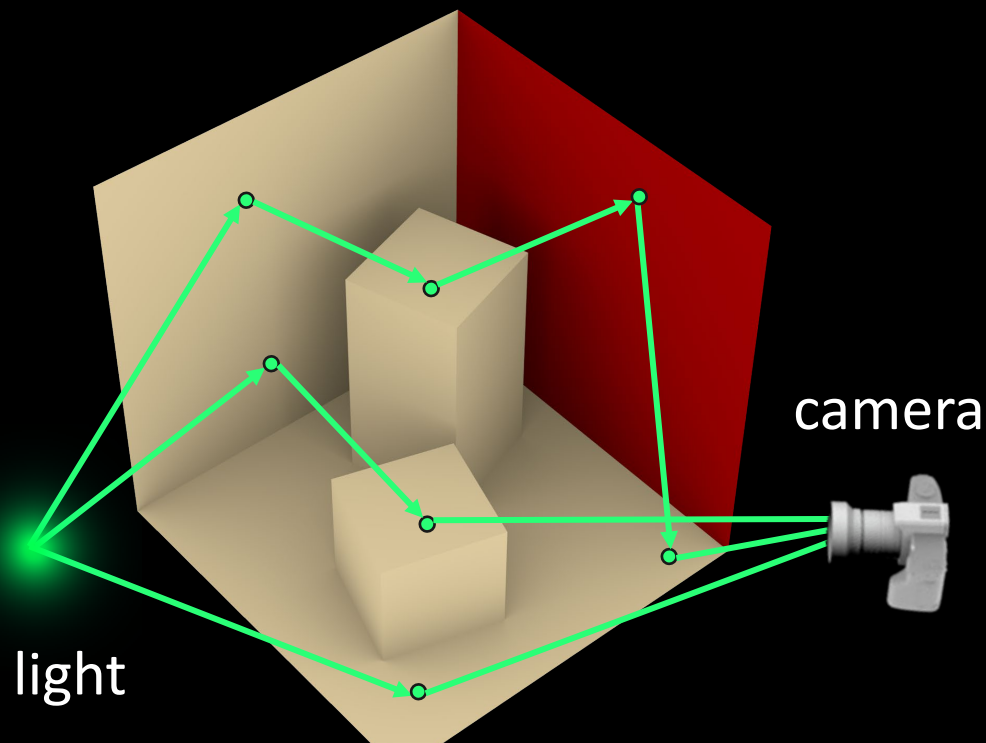


What are the “boundary” and discontinuities of V ?


Boundaries



(a) **Boundary** edges

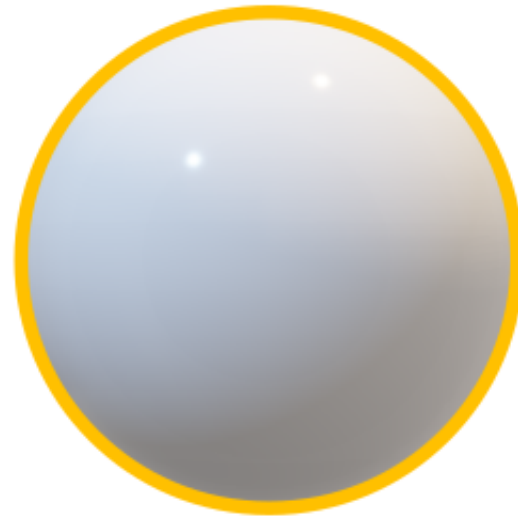

(b) **Silhouette** edges

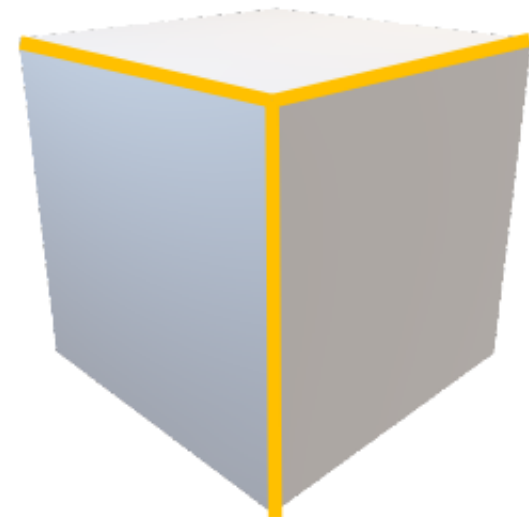


(c) **Sharp** edges

Fig. 5. Three types of edges (drawn in yellow) that can cause geometric discontinuities: (a) boundary, (b) silhouette, and (c) sharp.

Let's differentiate it

$$\frac{\partial}{\partial \pi} L(x, \omega; \pi) = \underbrace{\int_{V(x, \pi)} \frac{\partial}{\partial \pi} L dA(x)}_{\text{recursively estimate derivative of } L \text{ at some visible point}} + \underbrace{\int_{\partial V(x, \pi)} H(L) d\sigma(x)}_{\text{recursively estimate radiance } L \text{ at some boundary point}}$$

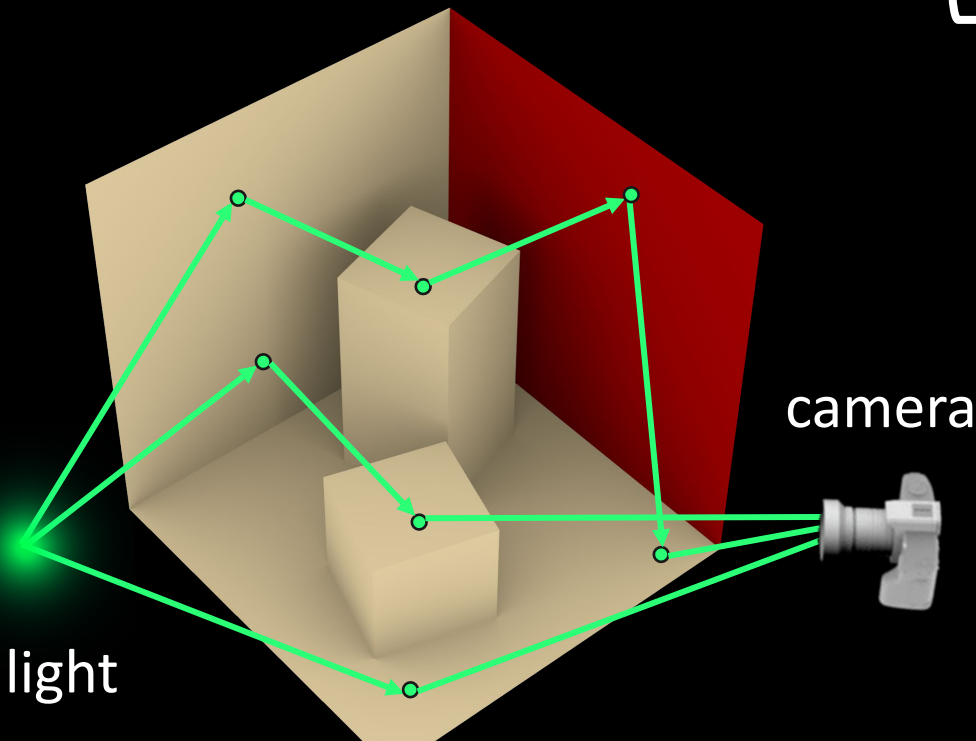

recursively estimate
derivative of L at
some visible point

recursively estimate
radiance L at some
boundary point

Not terribly good, as we ray trace, we need to:

- recompute silhouette at each vertex
- branch twice

Boundary edge detection and sampling



Not terribly good, as we ray trace, we need to:

- recompute silhouette at each vertex
- branch twice

Global geometry differentiation

Differentiable Monte Carlo Ray Tracing through Edge Sampling

TZU-MAO LI, MIT CSAIL

MIIKA AITTALA, MIT CSAIL

FRÉDO DURAND, MIT CSAIL



JAAKKO LEHTINEN, Aalto University & NVIDIA

Beyond Volumetric Albedo



— A Surface Optimization Framework for Non-Line-of-Sight Imaging

Chia-Yin Tsai, Aswin C. Sankaranarayanan, and Ioannis Gkioulekas
Carnegie Mellon University

Global geometry differentiation

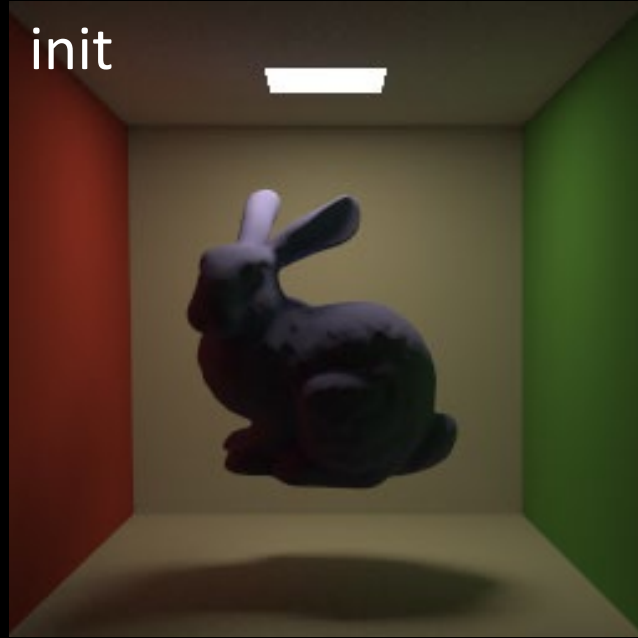


optimize
bunny
pose

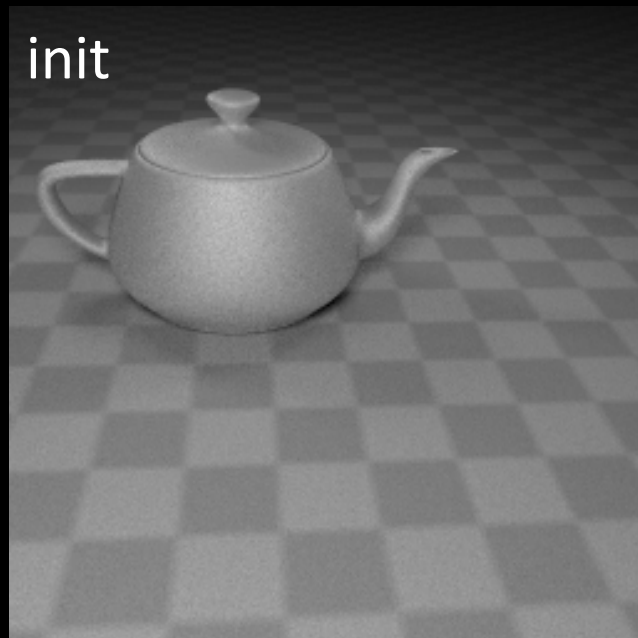

optimize
reflectance
and camera
pose

Let's differentiate it


$$\frac{\partial}{\partial \pi} L(x, \omega; \pi) = \int_{V(x, \pi)} \underbrace{F \left(\frac{\partial}{\partial \pi} L \right)}_{\text{render derivative of } L \text{ at some visible point}} dA(x) + \int_{\partial V(x, \pi)} \underbrace{H(L)}_{\text{render } L \text{ at some boundary (silhouette) point}} d\sigma(x)$$

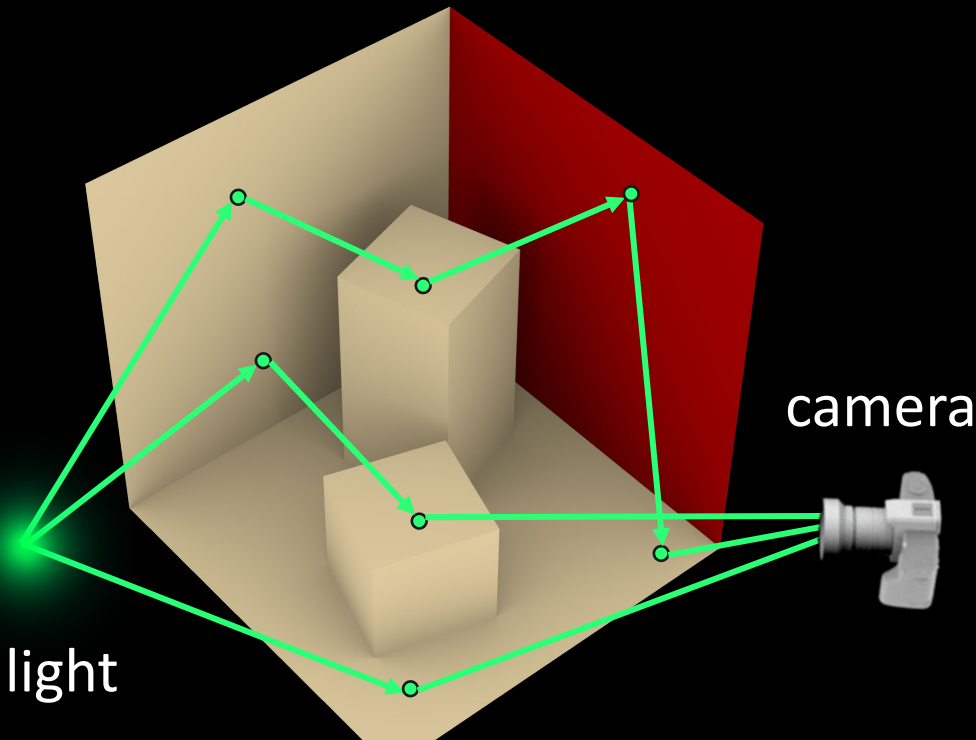

Not terribly good:

- As we ray trace, we need to recompute silhouette
- Branching of two at each recursion

CHALLENGES

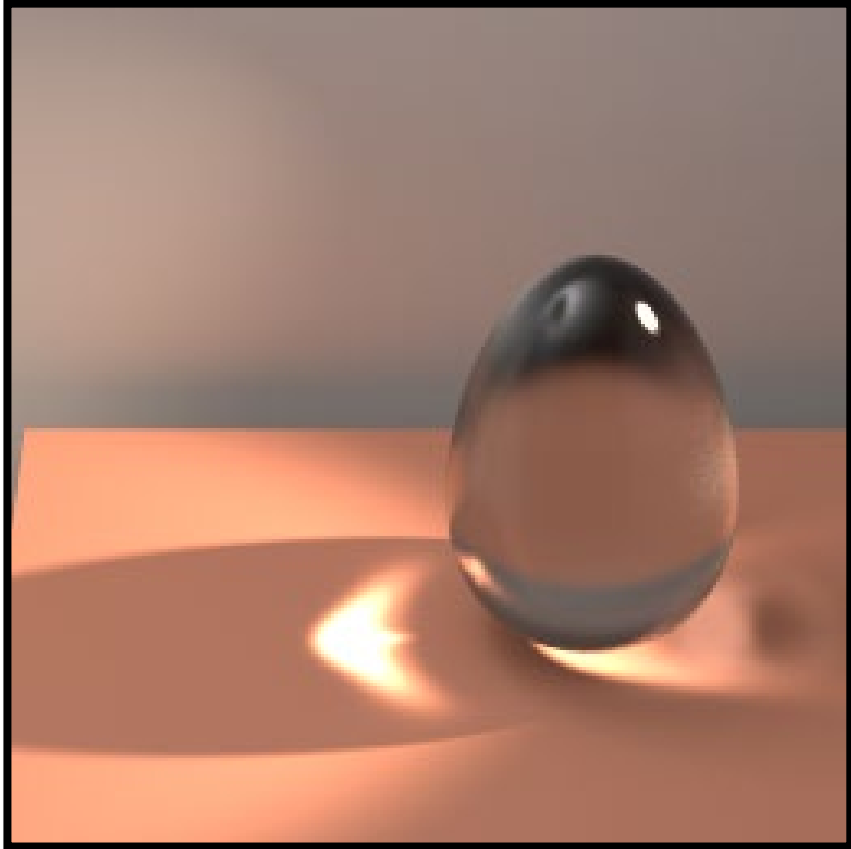


Complex light transport effects



Complex geometry

REPARAMETERIZATION APPROACHES

THE REYNOLDS TRANSPORT THEOREM

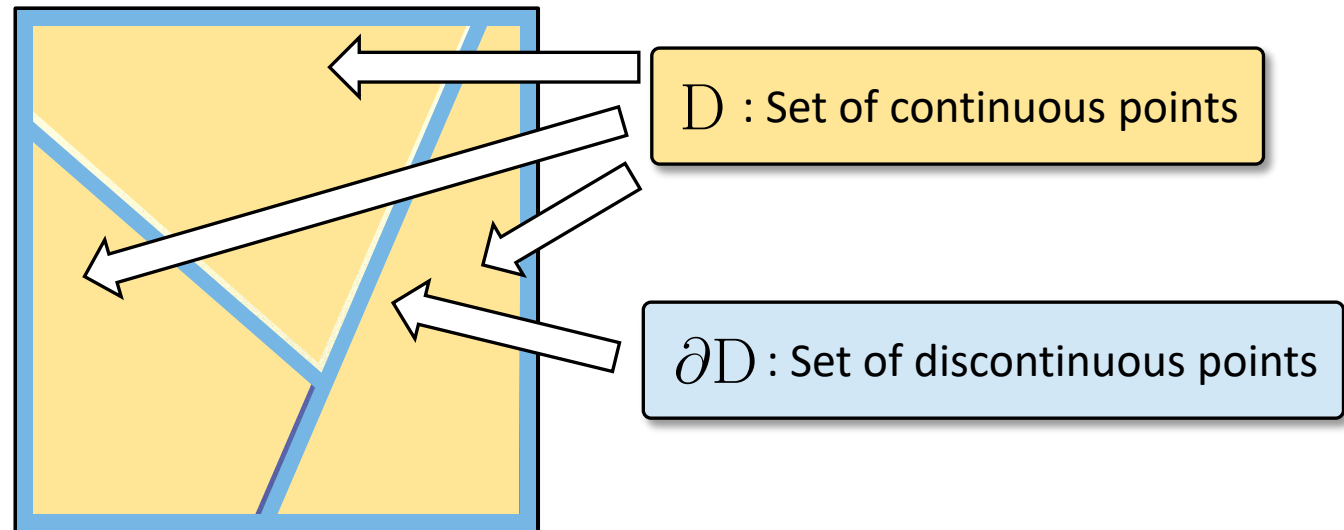

$$\partial_\theta \int_D f = \int_D \partial_\theta f + \int_{\partial D} f \vec{v} \cdot \vec{n}$$

Interior term Edge term

CONVERTING EDGE-SAMPLES TO AREA-SAMPLES

$$\int_{\partial D} f \vec{v} \cdot \vec{n}$$

is estimated through edge-samples ●

Goal: Rewrite


$$\int_{\partial D} f \vec{v} \cdot \vec{n}$$

into area integral

$$\int_D g$$




$$\int_D \nabla \cdot (\vec{v}_\theta f)$$

can be estimated through area-samples ●

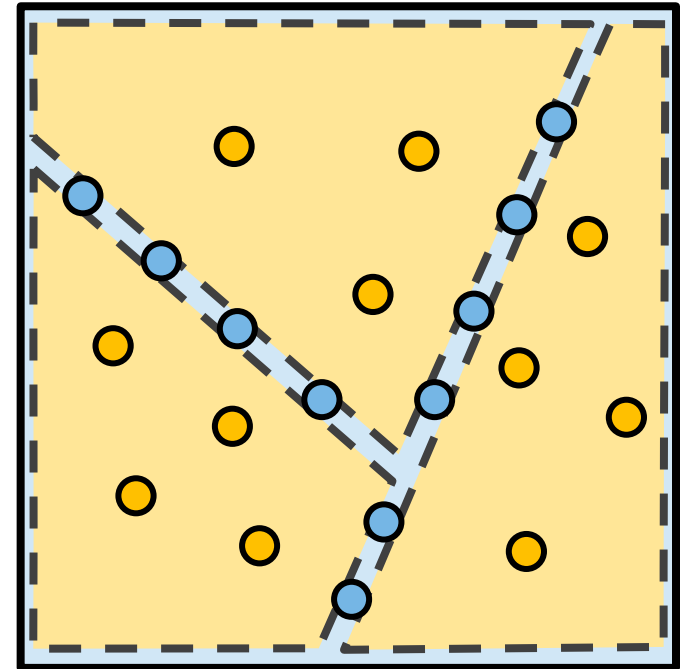

THE DIVERGENCE THEOREM

[Gauss 1813]

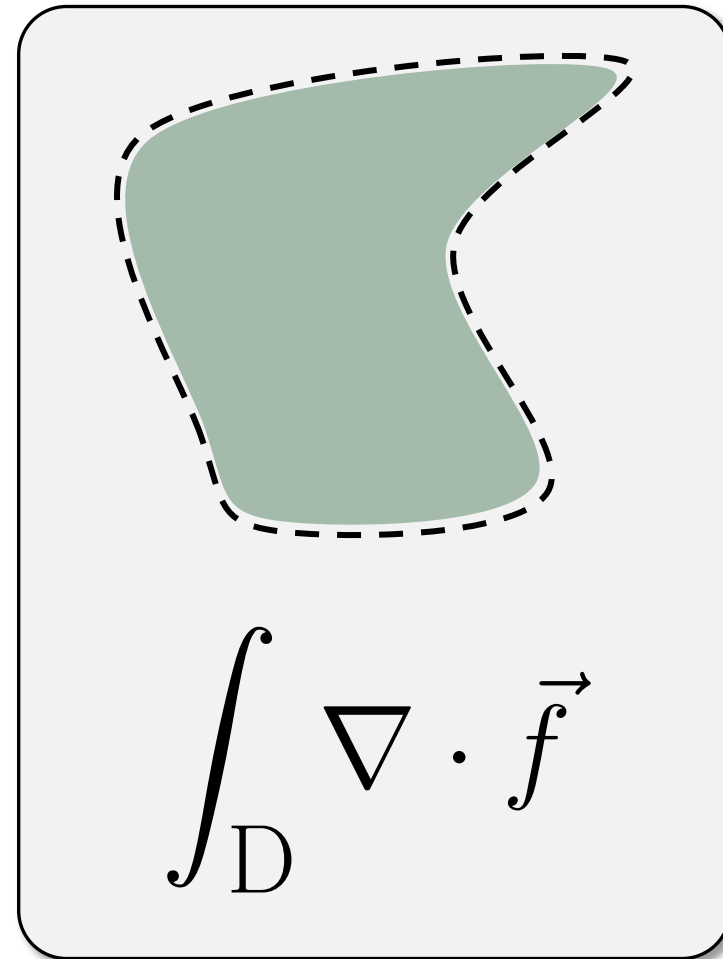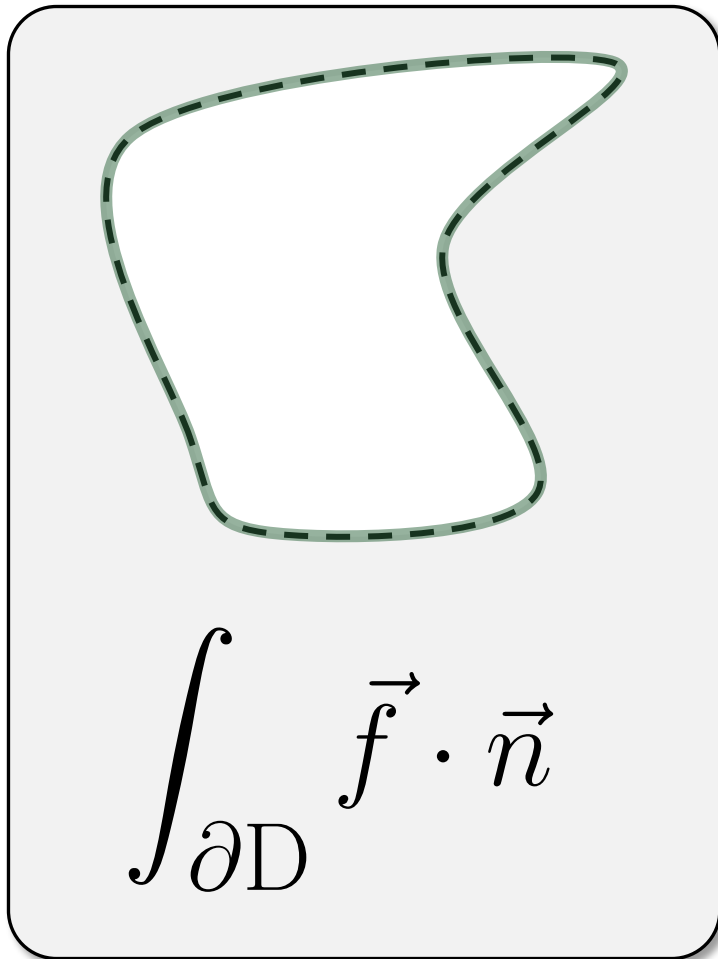

QUICK RECAP


- Used *Reynolds transport theorem* to find the boundary integral

$$\int_{\partial D} f \vec{v} \cdot \vec{n}$$


- Rewrote $\int_{\partial D} f \vec{v} \cdot \vec{n}$ to $\int_D \nabla \cdot (\vec{v}_\theta f)$ using the *divergence theorem*.

- Have to define the *vector field* \vec{v}_θ over domain D


A 2D EXAMPLE SCENE

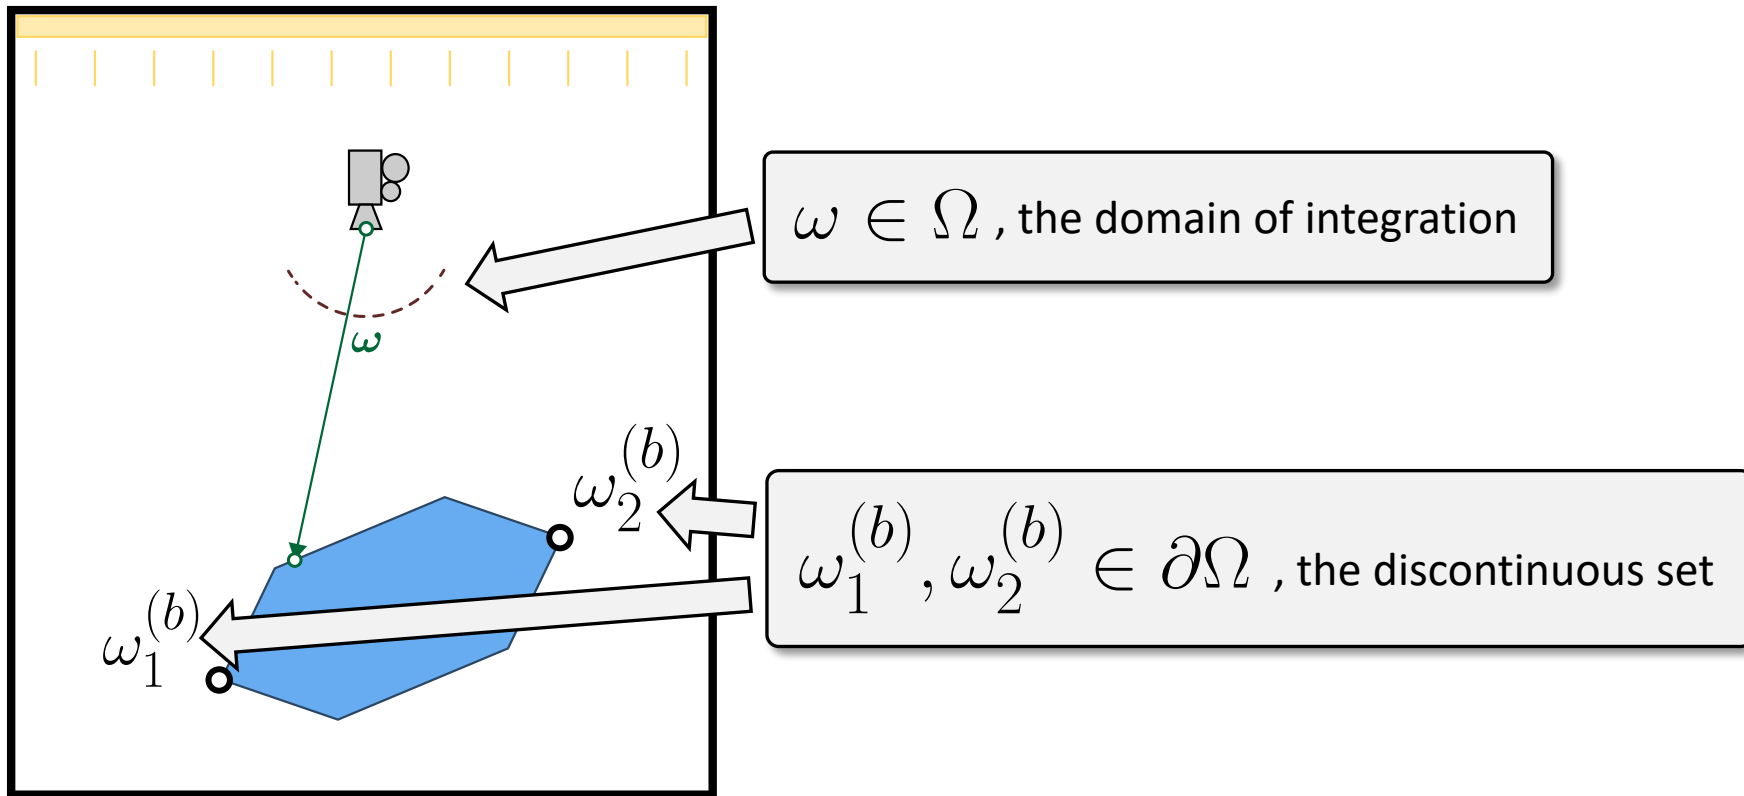


VELOCITY \vec{V} : THE BOUNDARY DERIVATIVE



$\partial_{\theta} \omega_i^{(b)}$: Derivative of boundary position w.r.t θ





WARP FIELD \mathcal{V}_θ : EXTENSION OF \vec{V} TO ALL POINTS

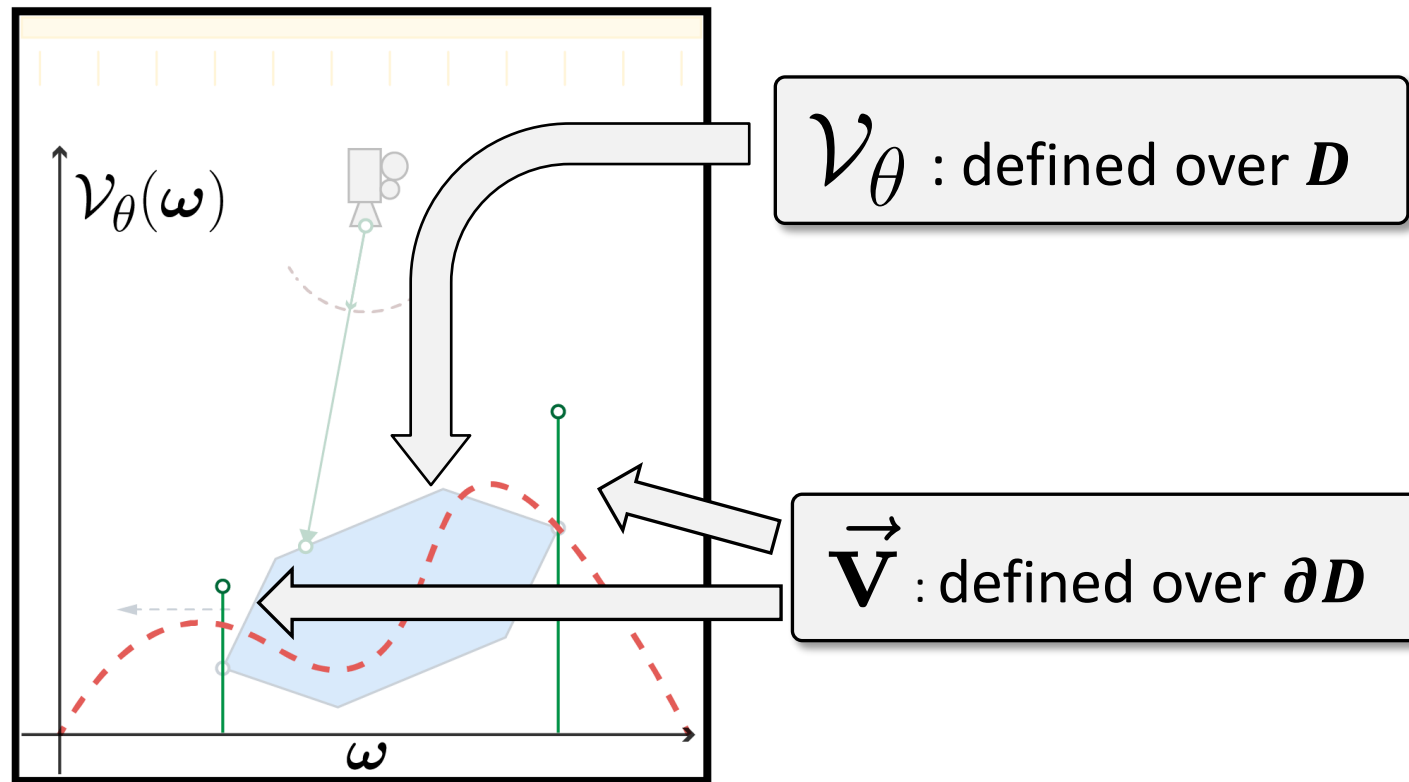



VALIDITY OF \vec{V}_θ

Rule 1: Continuous

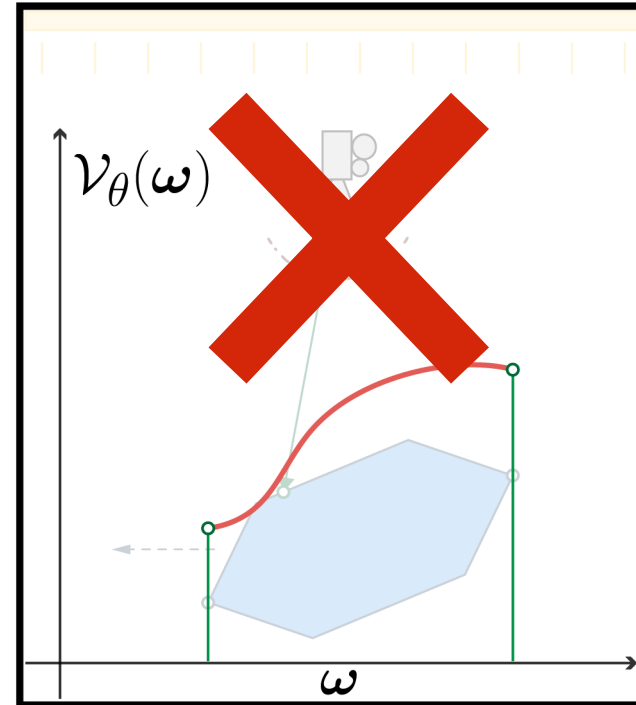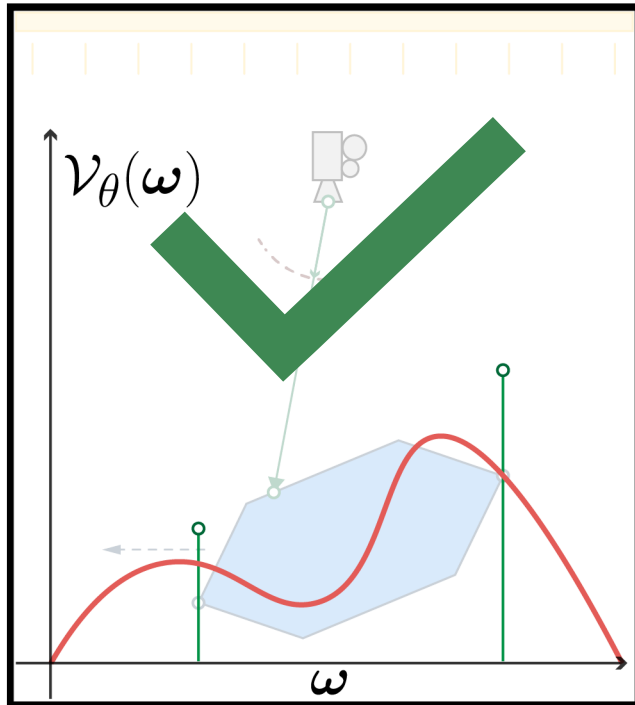

VALIDITY OF \vec{V}_θ

Rule 2: Boundary Consistent

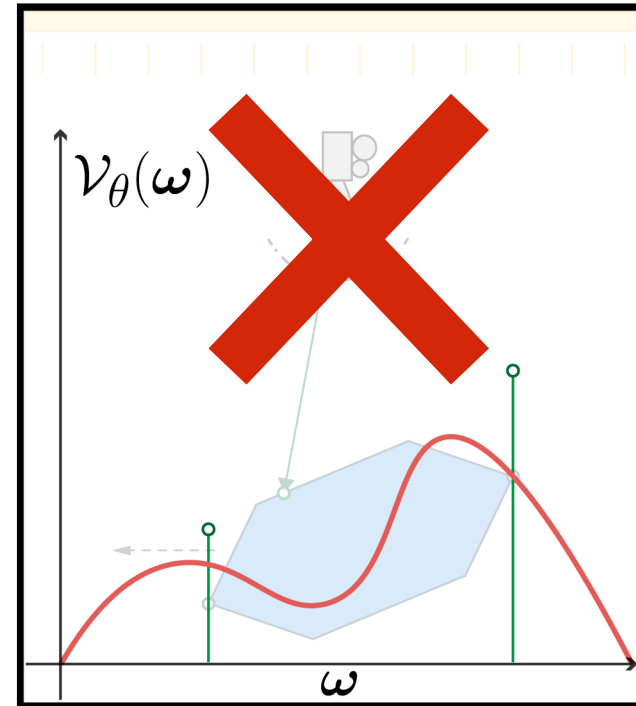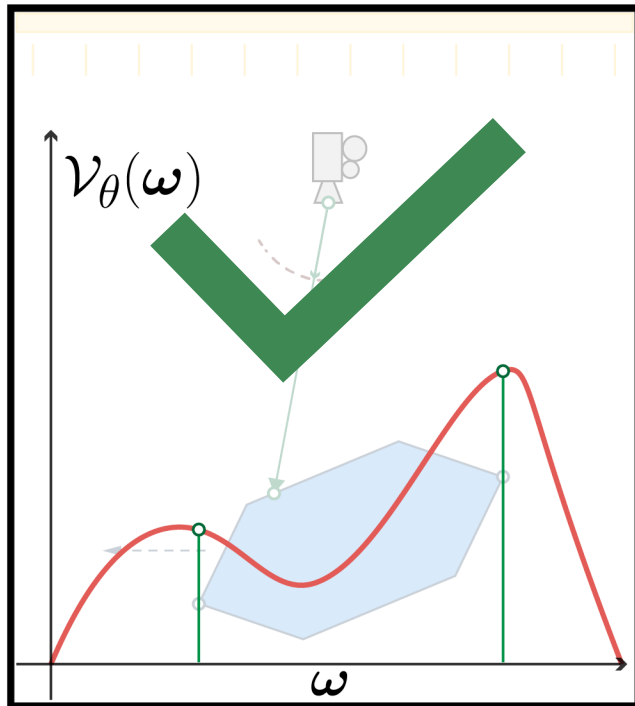

CONSTRUCTING \vec{V}_θ

Attempt 1 \longrightarrow Find $\partial_\theta \omega$ through *implicit derivative*


(Incorrect)

$$\mathbf{y} = \text{INTERSECT}(\omega, \theta) \implies \partial_\theta \omega = \frac{\partial_\omega \mathbf{y}}{\partial_\theta \mathbf{y}}$$

At all points (not just boundaries)

+ Boundary consistent

- Not continuous

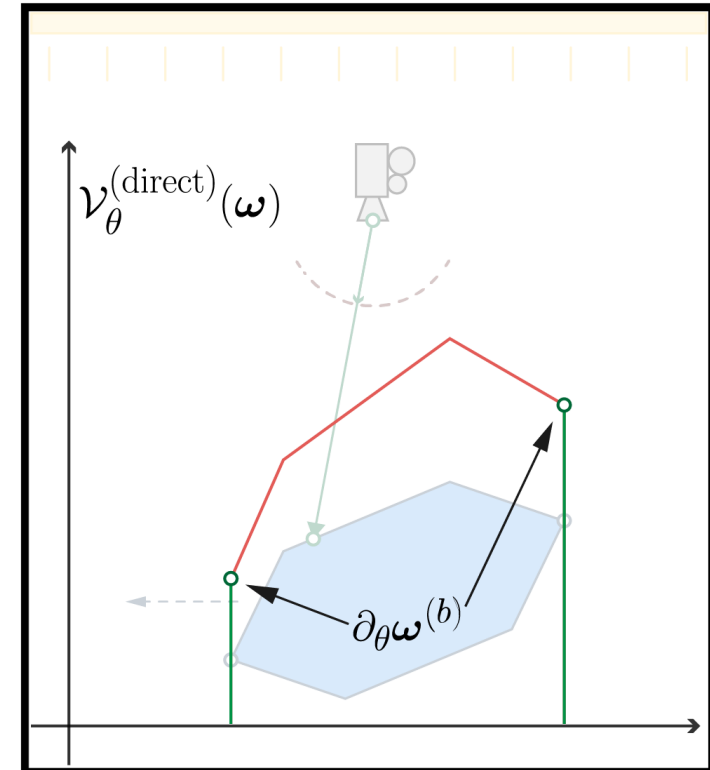

CONSTRUCTING \vec{V}_θ

Attempt 2 \longrightarrow Filter *Attempt 1* with a Gaussian filter


(Incorrect)

$$\int_{\Omega'} k(\omega, \omega') \frac{\partial \omega \mathbf{y}}{\partial \theta \mathbf{y}}$$

$k(.,.) = \text{Gaussian filter}$

+ Continuous


- Not boundary consistent

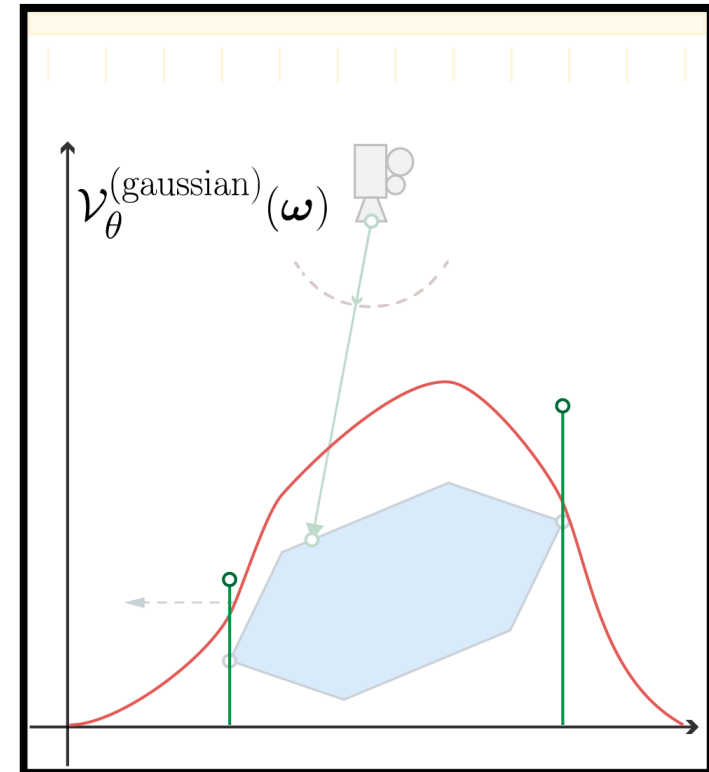

BOUNDARY-AWARE WEIGHTING

Goal: Find weights $k(\omega, \omega')$ s.t. $\vec{V}_\theta = \frac{\partial \omega y}{\partial \theta y}$ at boundaries.

Ideal weighting function

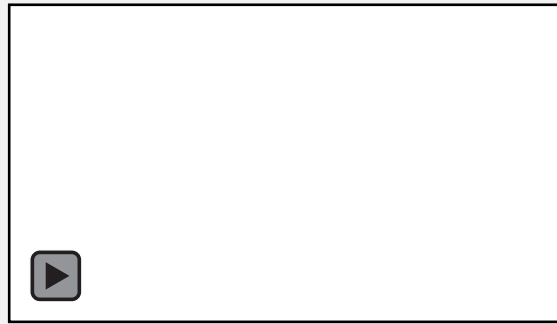

ω



Approach Dirac delta near boundaries



PATH-INTEGRAL FOR DIFFERENTIABLE RENDERING


FORWARD PATH INTEGRAL

$$I = \int_{\Omega} f(\bar{x}) d\mu(\bar{x})$$

Measurement contribution function

Path space

Area-product measure

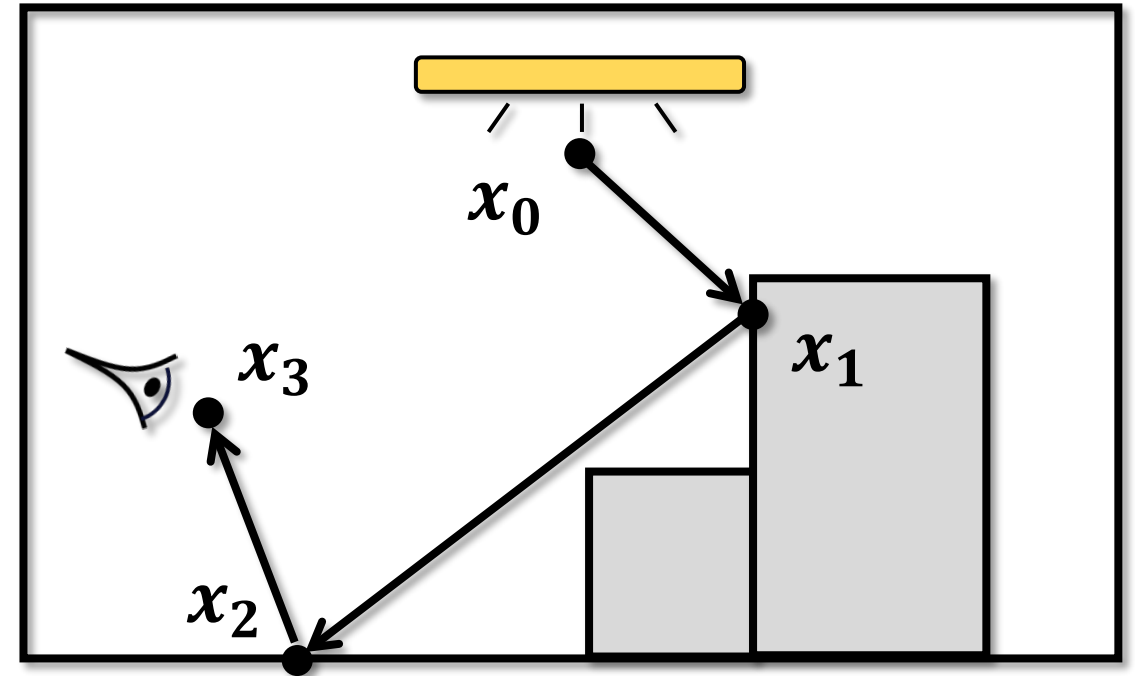

Light path $\bar{x} = (x_0, x_1, x_2, x_3)$

DIFFERENTIAL PATH INTEGRAL

Path Integral

A generalization of Reynolds theorem

$$I = \int_{\Omega} f(\bar{\mathbf{x}}) d\mu(\bar{\mathbf{x}}) \quad \longrightarrow \quad \frac{dI}{d\pi} = ?$$

We now derive $\partial I_N / \partial \pi$ in Eq. (25) using the recursive relations provided by Eqs. (21) and (24). Let

$$h_n^{(0)} := [\prod_{n'=n+1}^N g(\mathbf{x}_{n'}; \mathbf{x}_{n'-2}, \mathbf{x}_{n'-1})] W_e(\mathbf{x}_N \rightarrow \mathbf{x}_{N-1}), \quad (52)$$

$$h_n^{(1)} := \sum_{n'=n+1}^N \kappa(\mathbf{x}_{n'}) V(\mathbf{x}_{n'}), \quad (53)$$

$$\Delta h_{n,n'}^{(0)} := h_n^{(0)} \Delta g(\mathbf{x}_{n'}; \mathbf{x}_{n'-2}, \mathbf{x}_{n'-1}) / g(\mathbf{x}_{n'}; \mathbf{x}_{n'-2}, \mathbf{x}_{n'-1}), \quad (54)$$

for $0 \leq n < n' \leq N$. We omit the dependencies of $h_n^{(0)}$, $h_n^{(1)}$, and $\Delta h_{n,n'}^{(0)}$ on $\mathbf{x}_{n+1}, \dots, \mathbf{x}_N$ for notational convenience.

We now show that, for all $0 \leq n < N$, it holds that

$$h_n(\mathbf{x}_n; \mathbf{x}_{n-1}) = \int_{\mathcal{M}^{N-n}} h_n^{(0)} \prod_{n'=n+1}^N dA(\mathbf{x}_{n'}), \quad (55)$$

and

$$\begin{aligned} \dot{h}_n(\mathbf{x}_n; \mathbf{x}_{n-1}) &= \int_{\mathcal{M}^{N-n}} \left[\left(h_n^{(0)} \right)' - h_n^{(0)} h_n^{(1)} \right] \prod_{\substack{n'=n+1 \\ i \neq n'}}^N dA(\mathbf{x}_{n'}) \\ &+ \sum_{n'=n+1}^N \int \Delta h_{n,n'}^{(0)} V_{\partial \mathcal{M}_{n'}}(\mathbf{x}_{n'}) d\ell(\mathbf{x}_{n'}) \prod_{\substack{n < i \leq N \\ i \neq n'}} dA(\mathbf{x}_i), \end{aligned} \quad (56)$$

where the integral domain of the second term on the right-hand side, which is omitted for notational clarity, is $\mathcal{M}(\pi)$ for each \mathbf{x}_i with $i \neq n'$ and $\partial \mathcal{M}_{n'}(\pi)$, which depends on $\mathbf{x}_{n'-1}$, for $\mathbf{x}_{n'}$.

It is easy to verify that Eqs. (55) and (56) hold for $n = N - 1$. We now show that, if they hold for some $0 < n < N$, then it is also the case for $n - 1$. Let $g_{n-1} := g(\mathbf{x}_n; \mathbf{x}_{n-2}, \mathbf{x}_{n-1})$ for all $0 < n \leq N$. Then,

$$\begin{aligned} h_{n-1}(\mathbf{x}_{n-1}; \mathbf{x}_{n-2}) &= \int_{\mathcal{M}} g_{n-1} \int_{\mathcal{M}^{N-n}} h_n^{(0)} \prod_{n'=n+1}^N dA(\mathbf{x}_{n'}) dA(\mathbf{x}_n) \\ &= \int_{\mathcal{M}^{N-n+1}} h_{n-1}^{(0)} \prod_{n'=n}^N dA(\mathbf{x}_{n'}), \end{aligned} \quad (57)$$

and

$$\begin{aligned} \dot{h}_{n-1}(\mathbf{x}_{n-1}; \mathbf{x}_{n-2}) &= \int_{\mathcal{M}} \left[\dot{g}_{n-1} h_n + g_{n-1} (\dot{h}_n - h_n \kappa(\mathbf{x}_n) V(\mathbf{x}_n)) \right] dA(\mathbf{x}_n) \\ &+ \int_{\partial \mathcal{M}_n} \Delta g_{n-1} h_n V_{\partial \mathcal{M}_n} d\ell(\mathbf{x}_n) \\ &= \int_{\mathcal{M}^{N-n+1}} \left\{ \dot{g}_{n-1} h_n^{(0)} + g_{n-1} \left[\left(h_n^{(0)} \right)' - h_n^{(0)} h_{n-1}^{(1)} \right] \right\} \prod_{n'=k}^N dA(\mathbf{x}_{n'}) \\ &+ \sum_{n'=n+1}^N \int g_{n-1} \Delta h_{n,n'}^{(0)} V_{\partial \mathcal{M}_{n'}}(\mathbf{x}_{n'}) d\ell(\mathbf{x}_{n'}) \prod_{\substack{n \leq i \leq N \\ i \neq n'}} dA(\mathbf{x}_i) \\ &+ \int \Delta g_{n-1} h_n^{(0)} V_{\partial \mathcal{M}_n} d\ell(\mathbf{x}_n) \prod_{n'=n+1}^N dA(\mathbf{x}_{n'}) \\ &= \int_{\mathcal{M}^{N-n+1}} \left[\left(h_{n-1}^{(0)} \right)' - h_{n-1}^{(0)} h_{n-1}^{(1)} \right] \prod_{n'=n}^N dA(\mathbf{x}_{n'}) \\ &+ \sum_{n'=n}^N \int \Delta h_{n-1,n'}^{(0)} V_{\partial \mathcal{M}_{n'}}(\mathbf{x}_{n'}) d\ell(\mathbf{x}_{n'}) \prod_{\substack{n \leq i \leq N \\ i \neq n'}} dA(\mathbf{x}_i). \end{aligned} \quad (58)$$

Thus, using mathematical induction, we know that Eqs. (55) and (56) hold for all $0 \leq n < N$.

Notice that $h_0^{(0)} = f$ and $\Delta h_{0,n'}^{(0)} = \Delta f_{n'}$, where $\Delta f_{n'}$ follows the definition in Eq. (28). Letting $n = 0$ in Eq. (56) yields

$$\begin{aligned} \dot{h}_0(\mathbf{x}_0) &= \int_{\mathcal{M}^N} \left[\dot{f}(\bar{\mathbf{x}}) - f(\bar{\mathbf{x}}) \sum_{n'=1}^N \kappa(\mathbf{x}_{n'}) V(\mathbf{x}_{n'}) \right] \prod_{n'=1}^N dA(\mathbf{x}_{n'}) \\ &+ \sum_{n'=1}^N \int \Delta f_{n'}(\bar{\mathbf{x}}) V_{\partial \mathcal{M}_{n'}} d\ell(\mathbf{x}_{n'}) \prod_{\substack{0 < i \leq N \\ i \neq n'}} dA(\mathbf{x}_i). \end{aligned} \quad (59)$$

Lastly, based on the assumption that h_0 is continuous in \mathbf{x}_0 , Eq. (25) can be obtained by differentiating Eq. (23):

$$\begin{aligned} \frac{\partial I_N}{\partial \pi} &= \frac{\partial}{\partial \pi} \int_{\mathcal{M}} h_0(\mathbf{x}_0) dA(\mathbf{x}_0) \\ &= \int_{\mathcal{M}} \left[\dot{h}_0(\mathbf{x}_0) - h_0(\mathbf{x}_0) \kappa(\mathbf{x}_0) V(\mathbf{x}_0) \right] dA(\mathbf{x}_0) \\ &+ \int_{\partial \mathcal{M}_0} h_0(\mathbf{x}_0) V_{\partial \mathcal{M}_0}(\mathbf{x}_0) d\ell(\mathbf{x}_0) \\ &= \int_{\Omega_N} \left[\dot{f}(\bar{\mathbf{x}}) - f(\bar{\mathbf{x}}) \sum_{K=0}^N \kappa(\mathbf{x}_K) V(\mathbf{x}_K) \right] d\mu(\bar{\mathbf{x}}) \\ &+ \sum_{K=0}^N \int_{\Omega_{N,K}} \Delta f_K(\bar{\mathbf{x}}) V_{\partial \mathcal{M}_K} d\mu'_{N,K}(\bar{\mathbf{x}}). \end{aligned} \quad (60)$$

Full derivation in the paper

DIFFERENTIAL PATH INTEGRAL

Path Integral

A generalization of Reynolds theorem



Differential Path Integral

$$I = \int_{\Omega} f(\bar{x}) d\mu(\bar{x})$$



$$\frac{dI}{d\pi} = \int_{\Omega} \frac{d}{d\pi} f(\bar{x}) d\mu(\bar{x}) + \int_{\partial\Omega} g(\bar{x}) d\mu'(\bar{x})$$

path space \rightarrow Interboundary path space \rightarrow Boundary integral

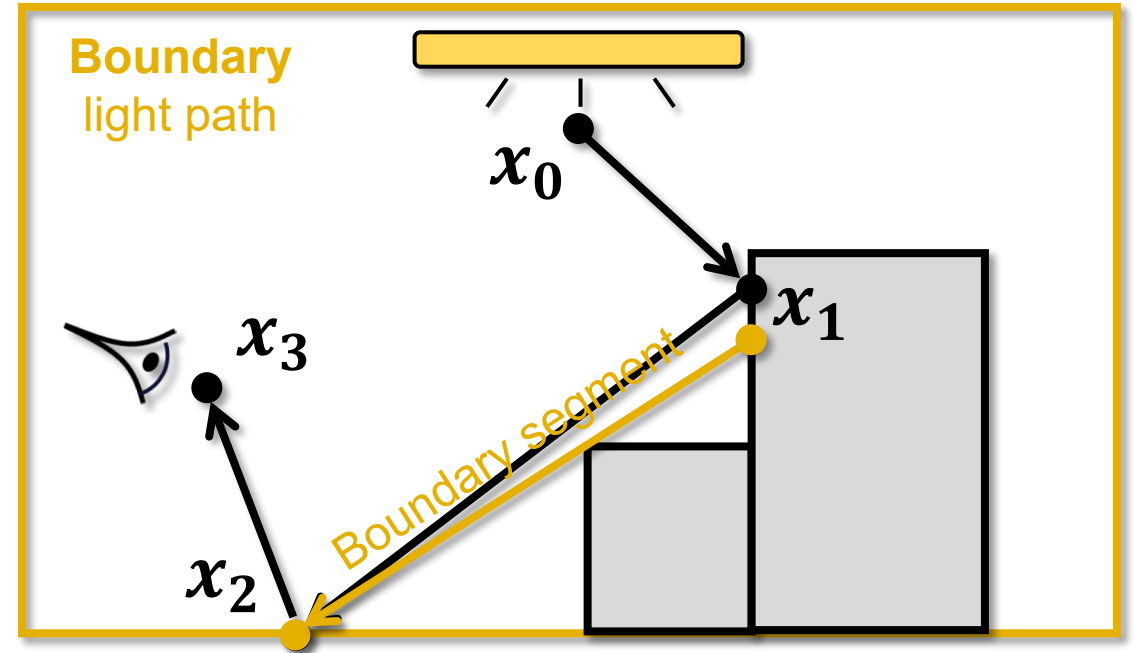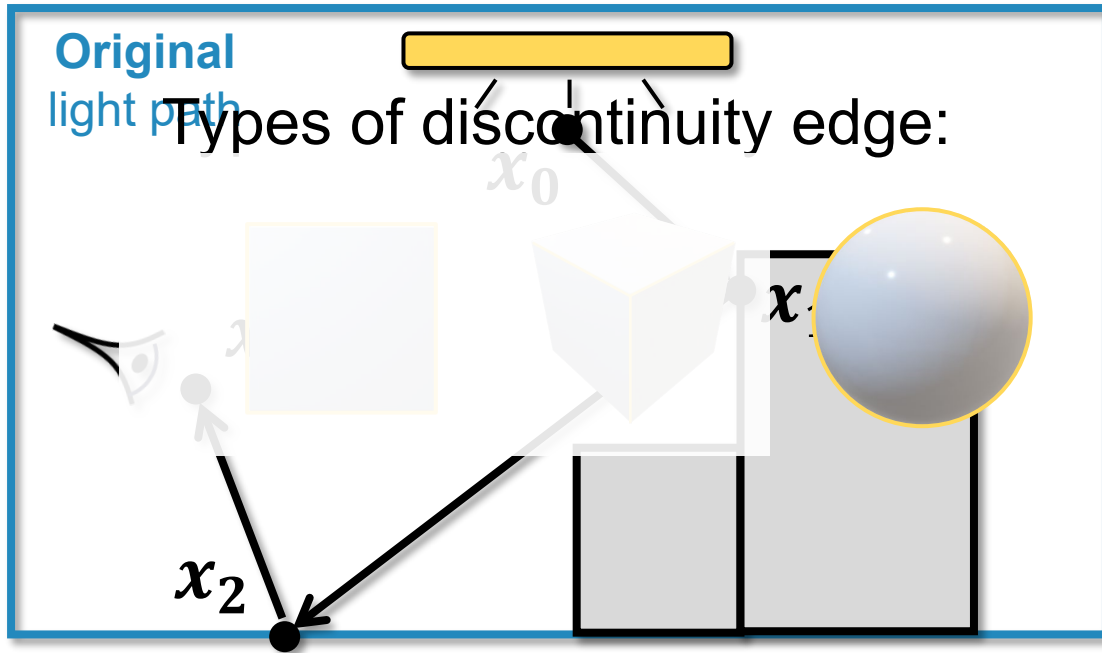


SOURCE OF DISCONTINUITIES




Boundary edge



Sharp edge



Silhouette edge

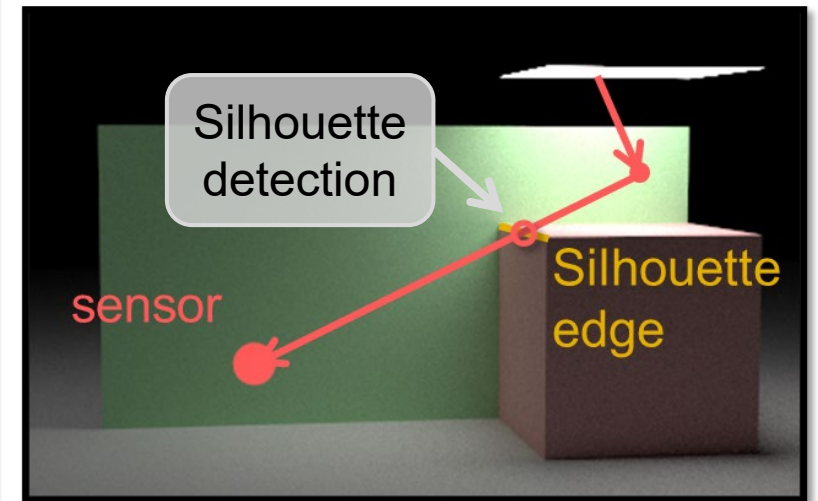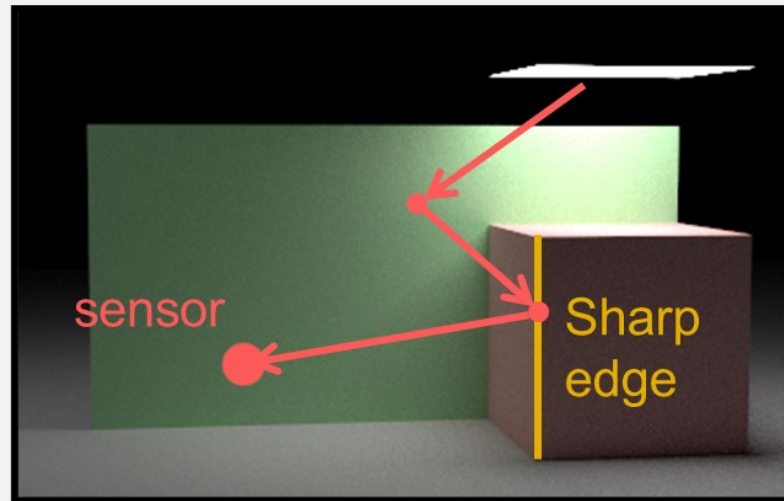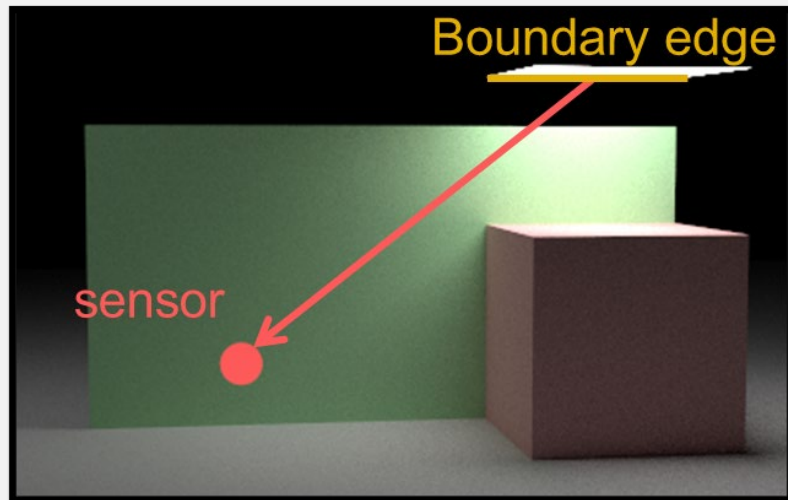


Topology-driven

Visibility-driven

TEXTURE PARAMETERIZATION FOR SIMPLIFYING THE BOUNDARY TERM

REPARAMETERIZATION

$$E = \int_{\mathcal{L}(\pi)} L_e(\mathbf{y} \rightarrow \mathbf{x}) G(\mathbf{x}, \mathbf{y}) dA(\mathbf{y})$$

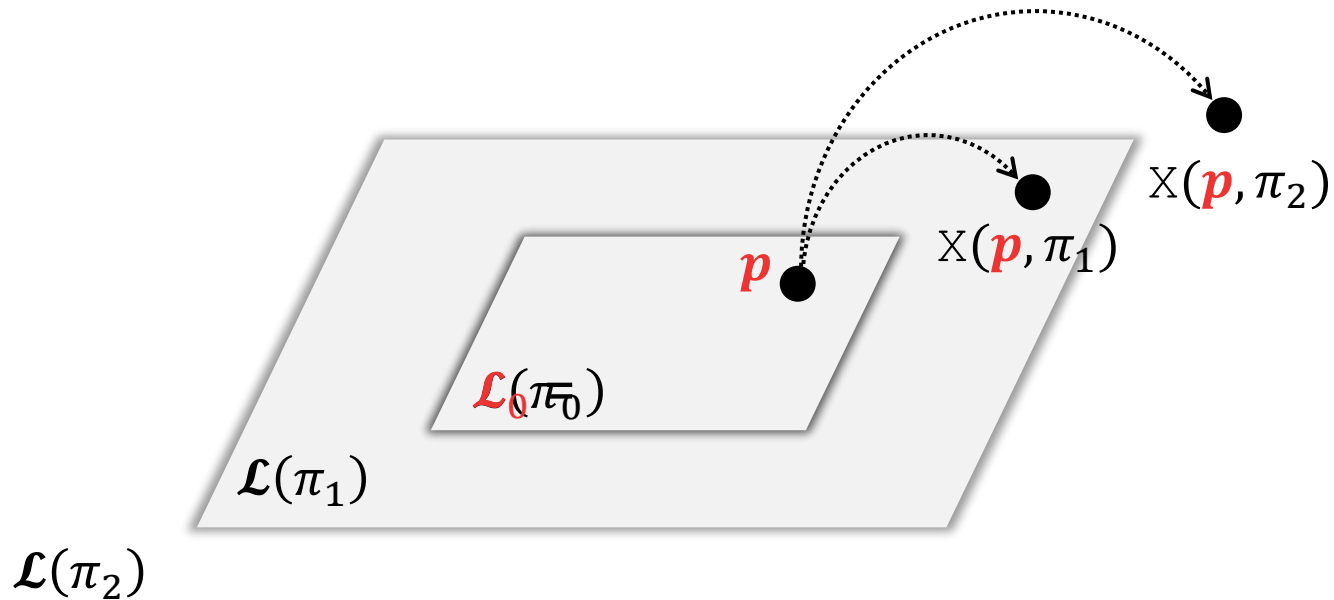

Parameterize $\mathcal{L}(\pi)$ using some fixed \mathcal{L}_0 :


$$\mathbf{y} = X(\mathbf{p}, \pi)$$

where $X(\cdot, \pi)$ is one-to-one and continuous

Reparameterization with $\mathbf{y} = X(\mathbf{p}, \pi)$:

$$E = \int_{\mathcal{L}_0} L_e(\mathbf{y} \rightarrow \mathbf{x}) G(\mathbf{x}, \mathbf{y}) \left| \frac{dA(\mathbf{y})}{dA(\mathbf{p})} \right| dA(\mathbf{p})$$

REPARAMETERIZATION

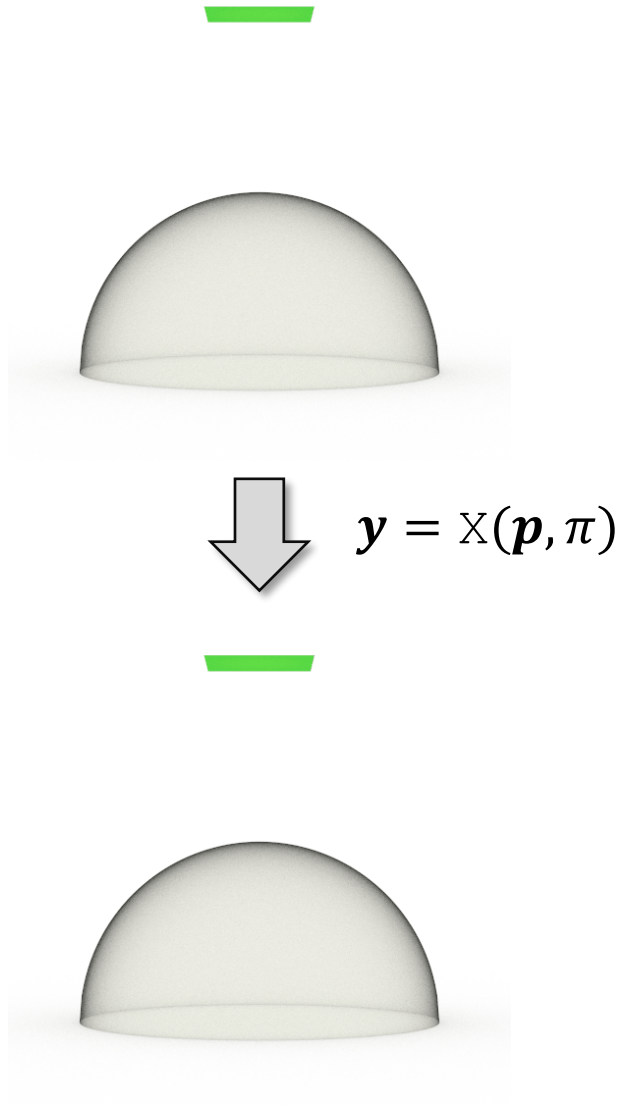

$$E = \int_{\mathcal{L}(\pi)} \overbrace{L_e(\mathbf{y} \rightarrow \mathbf{x}) G(\mathbf{x}, \mathbf{y})}^f dA(\mathbf{y})$$

$$\frac{dE}{d\pi} = \underbrace{\int_{\mathcal{L}(\pi)} \frac{df}{d\pi} dA}_{= 0} + \underbrace{\int_{\partial\mathcal{L}(\pi)} g dl}_{\neq 0}$$

$$E = \int_{\mathcal{L}_0} \overbrace{L_e(\mathbf{y} \rightarrow \mathbf{x}) G(\mathbf{x}, \mathbf{y})}^{f_0} \left| \frac{dA(\mathbf{y})}{dA(\mathbf{p})} \right| dA(\mathbf{p})$$

$$\frac{dE}{d\pi} = \underbrace{\int_{\mathcal{L}_0} \frac{df_0}{d\pi} dA}_{\neq 0} + \underbrace{\int_{\partial\mathcal{L}_0} g_0 dl}_{= 0}$$

REPARAMETERIZATION

Reparameterization for irradiance

$$E = \int_{\mathcal{L}(\pi)} L_e(\mathbf{y} \rightarrow \mathbf{x}) G(\mathbf{x}, \mathbf{y}) dA(\mathbf{y})$$

$$\mathbf{y} = \mathbb{X}(\mathbf{p}, \pi)$$




$$E = \int_{\mathcal{L}_0} L_e(\mathbf{y} \rightarrow \mathbf{x}) G(\mathbf{x}, \mathbf{y}) \left| \frac{dA(\mathbf{y})}{dA(\mathbf{p})} \right| dA(\mathbf{p})$$

Fixed surface

Reparameterization for path integral

$$I = \int_{\Omega(\pi)} f(\bar{\mathbf{x}}) d\mu(\bar{\mathbf{x}})$$

$$\bar{\mathbf{x}} = \mathbb{X}(\bar{\mathbf{p}}, \pi)$$



$$I = \int_{\Omega_0} f(\bar{\mathbf{x}}) \left| \frac{d\mu(\bar{\mathbf{x}})}{d\mu(\bar{\mathbf{p}})} \right| d\mu(\bar{\mathbf{p}})$$


Fixed path space

$$\prod_i \left| \frac{dA(\mathbf{x}_i)}{dA(\mathbf{p}_i)} \right|$$

DIFFERENTIAL PATH INTEGRAL

Original

$$I = \int_{\Omega(\pi)} f(\bar{\mathbf{x}}) d\mu(\bar{\mathbf{x}})$$



$$\bar{\mathbf{x}} = \mathbb{X}(\bar{\mathbf{p}}, \pi)$$

Reparameterized

$$I = \int_{\Omega_0} f(\bar{\mathbf{x}}) \left| \frac{d\mu(\bar{\mathbf{x}})}{d\mu(\bar{\mathbf{p}})} \right| d\mu(\bar{\mathbf{p}})$$

Original

$$\frac{dI}{d\pi} = \int_{\Omega(\pi)} \frac{df(\bar{\mathbf{x}})}{d\pi} d\mu(\bar{\mathbf{x}}) + \int_{\partial\Omega(\pi)} g(\bar{\mathbf{x}}) d\mu'(\bar{\mathbf{x}})$$

Pro: No global parametrization required
Con: More types of discontinuities

Reparameterized

$$\frac{dI}{d\pi} = \int_{\Omega_0} \frac{d}{d\pi} \left(f(\bar{\mathbf{x}}) \left| \frac{d\mu(\bar{\mathbf{x}})}{d\mu(\bar{\mathbf{p}})} \right| \right) d\mu(\bar{\mathbf{p}}) + \int_{\partial\Omega_0} g(\bar{\mathbf{p}}) d\mu'(\bar{\mathbf{p}})$$

Con: Requires global parametrization \mathbb{X}
Pro: Fewer types of discontinuities


DIFFERENTIAL PATH INTEGRAL

Differential path integral


$$\frac{dI}{d\pi} = \int_{\Omega(\pi)} \frac{df(\bar{x})}{d\pi} d\mu(\bar{x}) + \int_{\partial\Omega(\pi)} g(\bar{x}) d\mu'(\bar{x})$$

$$\frac{dI}{d\pi} = \int_{\Omega_0} \frac{d}{d\pi} \left(f(\bar{x}) \left| \frac{d\mu(\bar{x})}{d\mu(\bar{p})} \right| \right) d\mu(\bar{p}) + \int_{\partial\Omega_0} g(\bar{p}) d\mu'(\bar{p})$$

Topology-driven

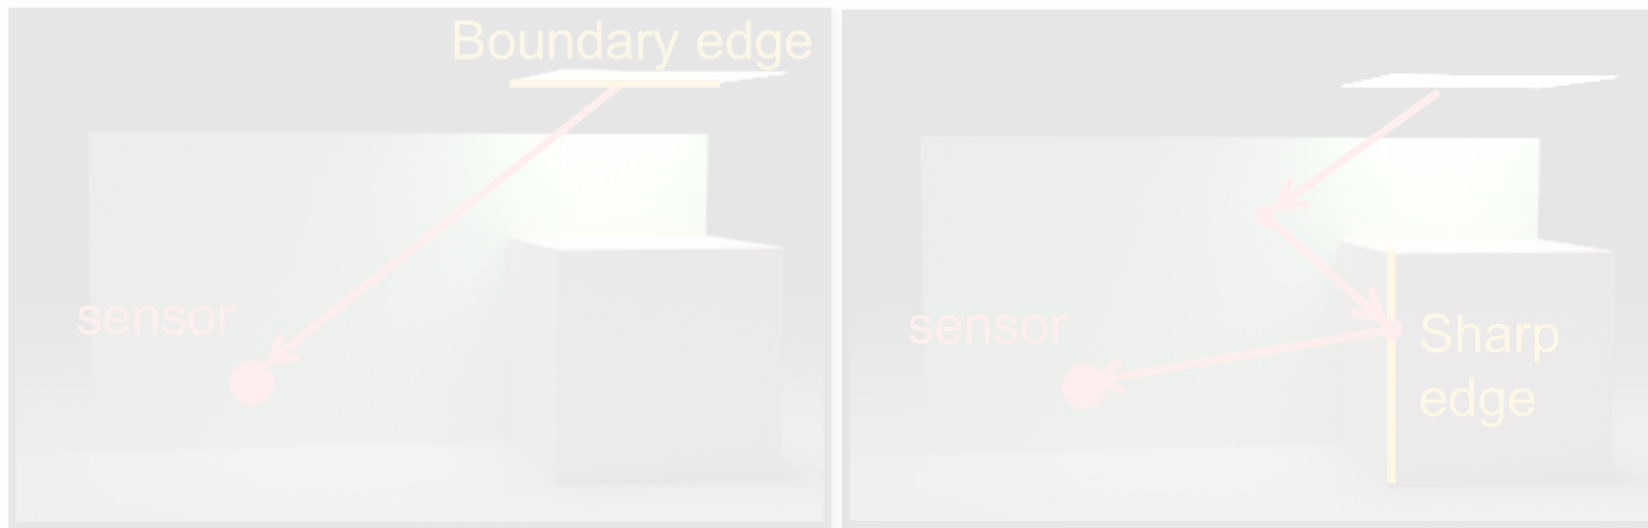

Visibility-driven

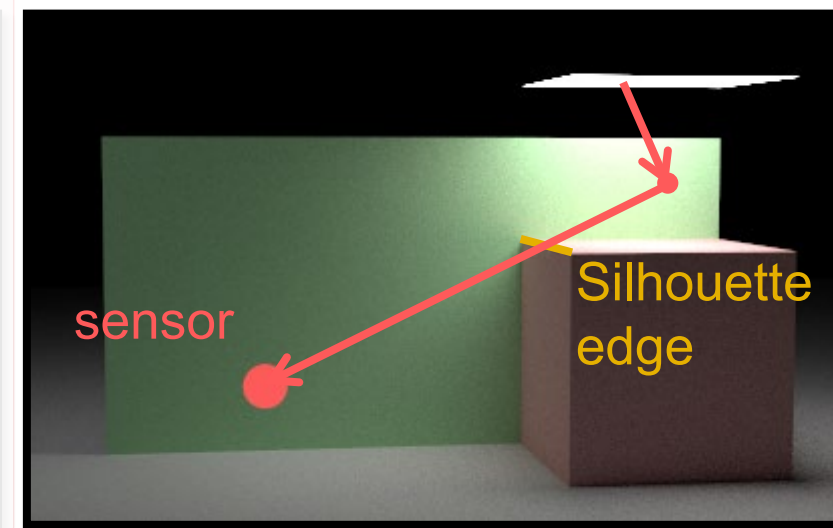

MONTE CARLO ESTIMATORS


ESTIMATING INTERIOR INTEGRAL

(Reparameterized)
Differential path Integral

$$\frac{\partial I}{\partial \pi} = \int_{\Omega_0} \frac{\partial}{\partial \pi} \left(f(\bar{\mathbf{x}}) \left| \frac{d\mu(\bar{\mathbf{x}})}{d\mu(\bar{\mathbf{p}})} \right| \right) d\mu(\bar{\mathbf{p}}) + \int_{\partial\Omega_0} g(\bar{\mathbf{p}}) d\mu'(\bar{\mathbf{p}})$$

Interior integral

Boundary integral

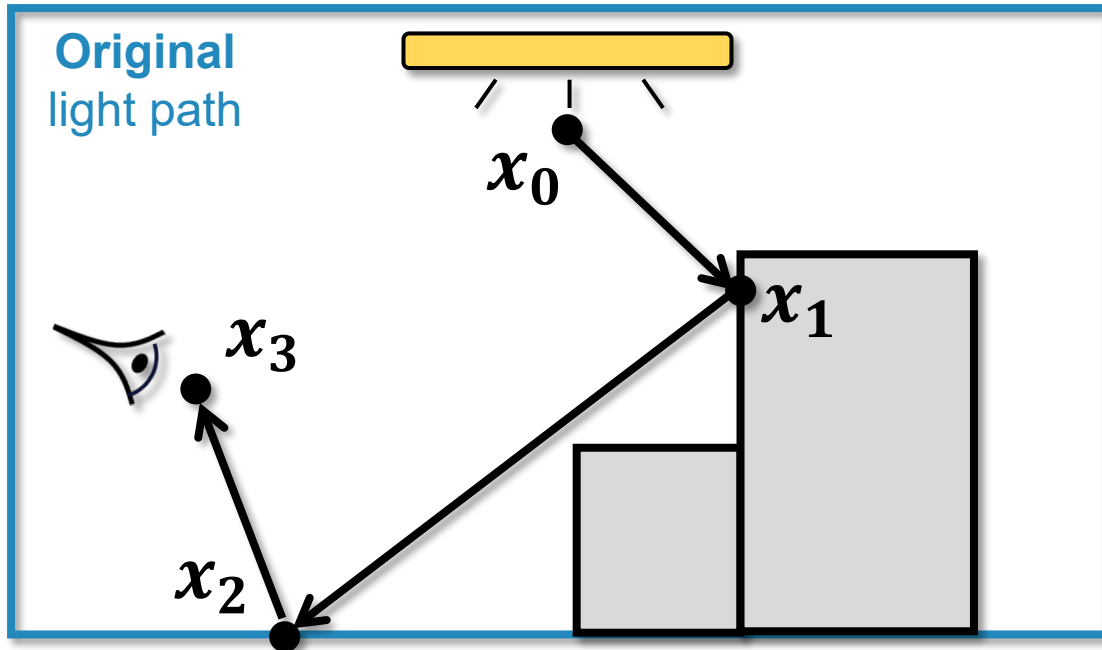



- Can be estimated using identical path sampling strategies as forward rendering
 - Unidirectional path tracing
 - Bidirectional path tracing
 - ...

ESTIMATING BOUNDARY INTEGRAL

(Reparameterized)
Differential path Integral

$$\frac{\partial I}{\partial \pi} = \int_{\Omega_0} \frac{\partial}{\partial \pi} \left(f(\bar{\mathbf{x}}) \left| \frac{d\mu(\bar{\mathbf{x}})}{d\mu(\bar{\mathbf{p}})} \right| \right) d\mu(\bar{\mathbf{p}}) + \int_{\partial\Omega_0} g(\bar{\mathbf{p}}) d\mu'(\bar{\mathbf{p}})$$

Boundary integral

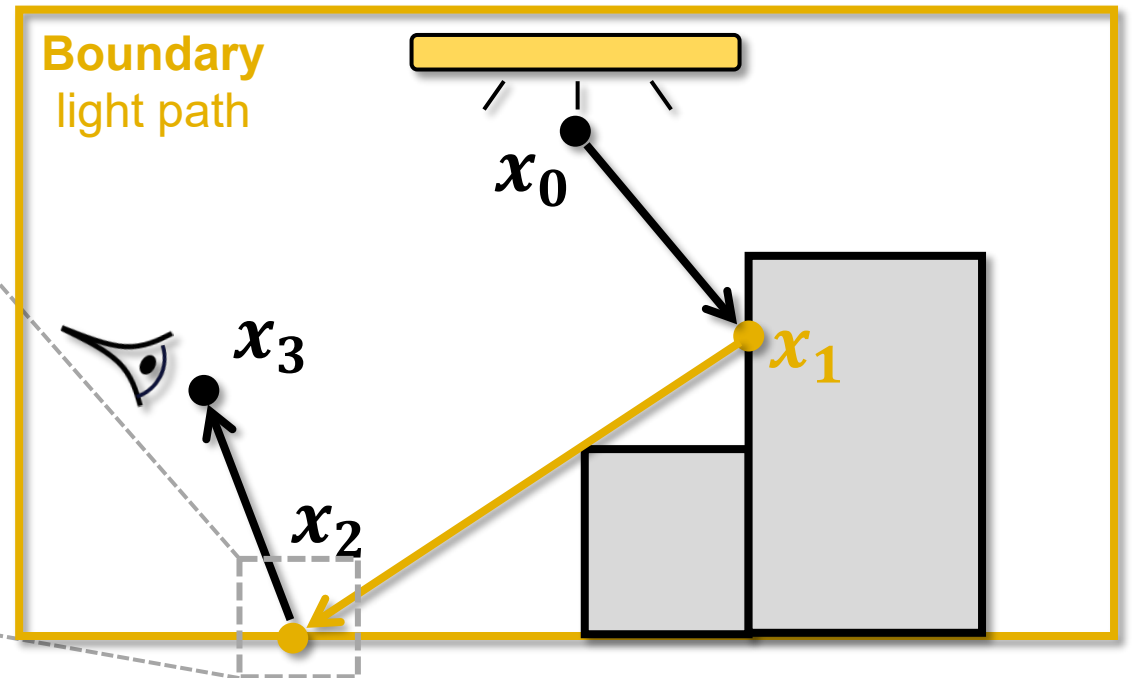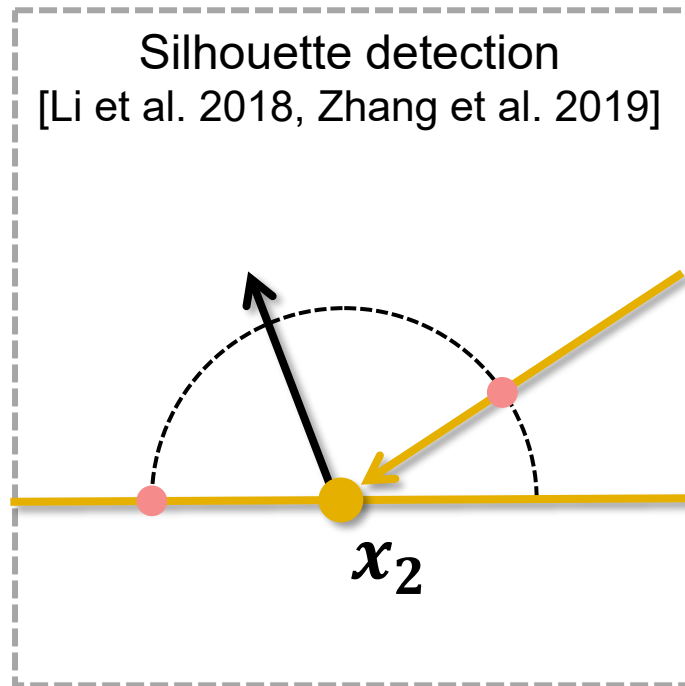


ESTIMATING BOUNDARY INTEGRAL


(Reparameterized)
Differential path Integral

$$\frac{\partial I}{\partial \pi} = \int_{\Omega_0} \frac{\partial}{\partial \pi} \left(f(\bar{\mathbf{x}}) \left| \frac{d\mu(\bar{\mathbf{x}})}{d\mu(\bar{\mathbf{p}})} \right| \right) d\mu(\bar{\mathbf{p}}) + \int_{\partial\Omega_0} g(\bar{\mathbf{p}}) d\mu'(\bar{\mathbf{p}})$$

where $\bar{\mathbf{x}} = \mathbb{X}(\bar{\mathbf{p}}, \pi)$

Boundary integral

- Construct **boundary segment**
- Construct **source** and **sensor** subpaths

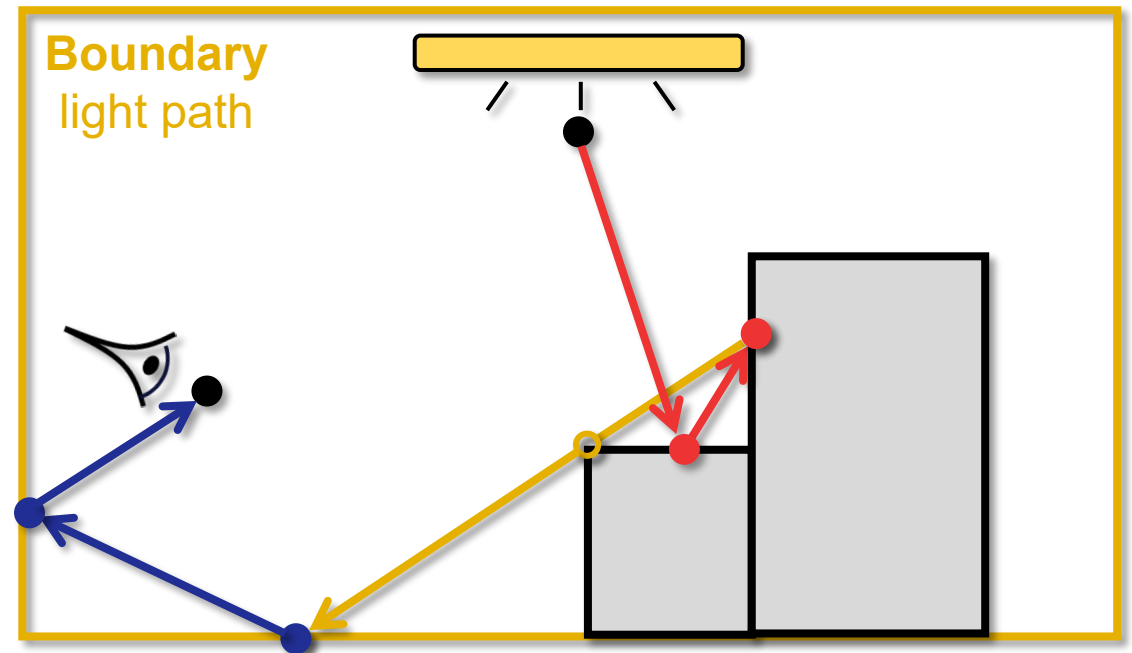- To improve efficiency
 - Next-event estimation
 - Importance sampling of boundary segments




OUR ESTIMATORS

Unidirectional estimator

Interior: **unidirectional** path tracing

Boundary: **unidirectional** sampling of subpaths

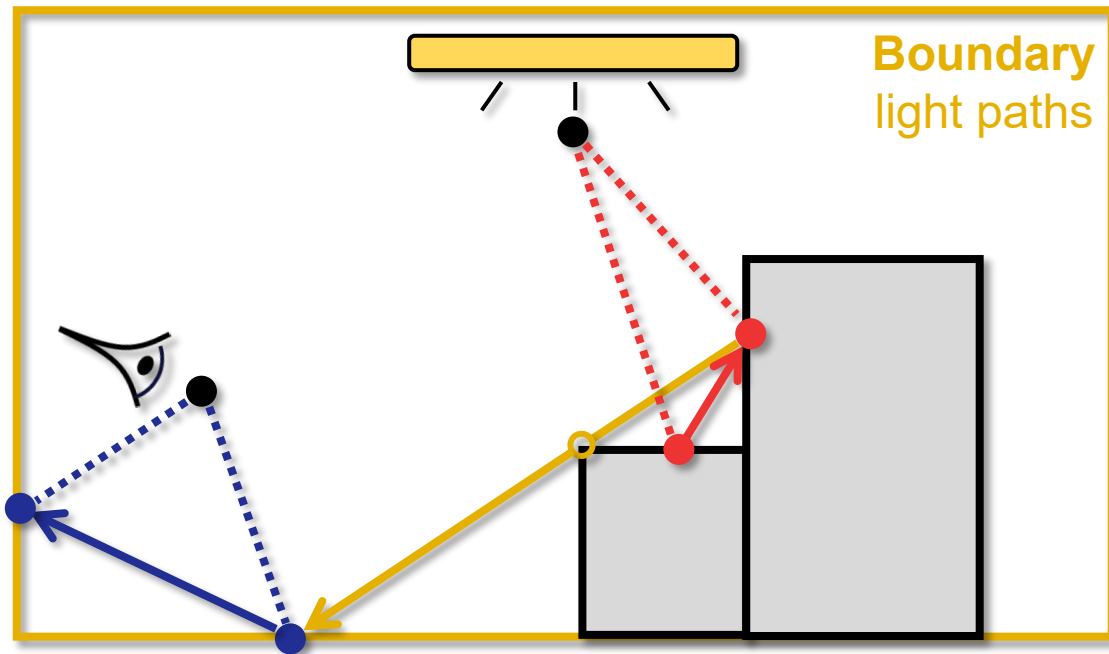


Unidirectional path tracing + NEE

Bidirectional estimator

Interior: **bidirectional** path tracing


Boundary: **bidirectional** sampling of subpaths

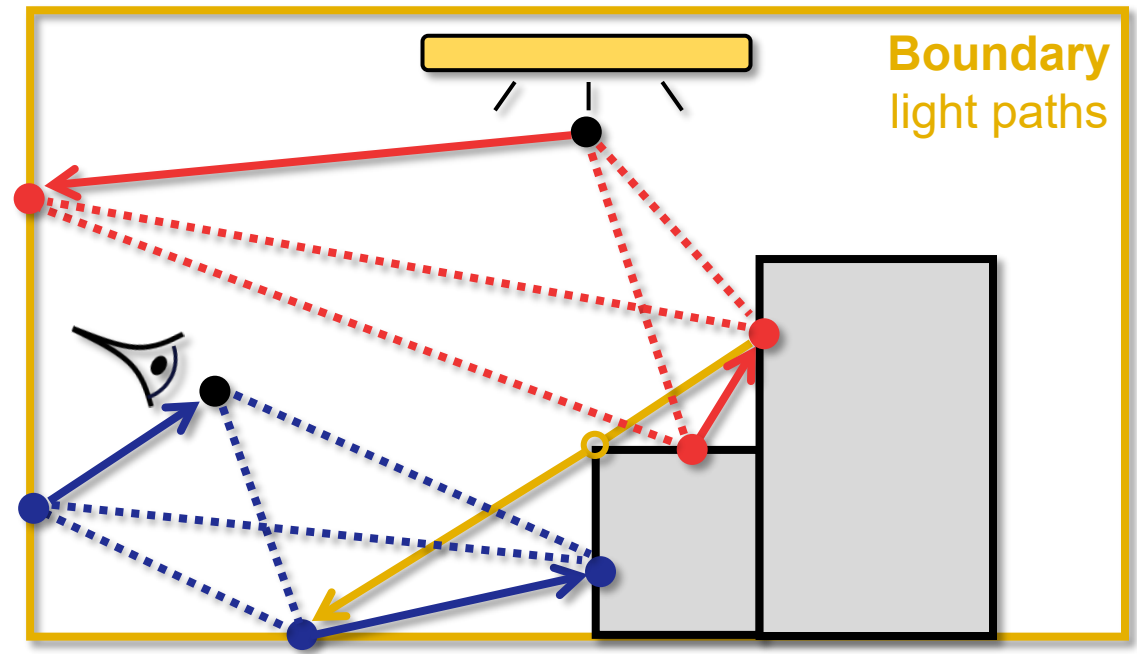



Bidirectional path tracing

SOME RESULTS

HANDLING COMPLEX GEOMETRY

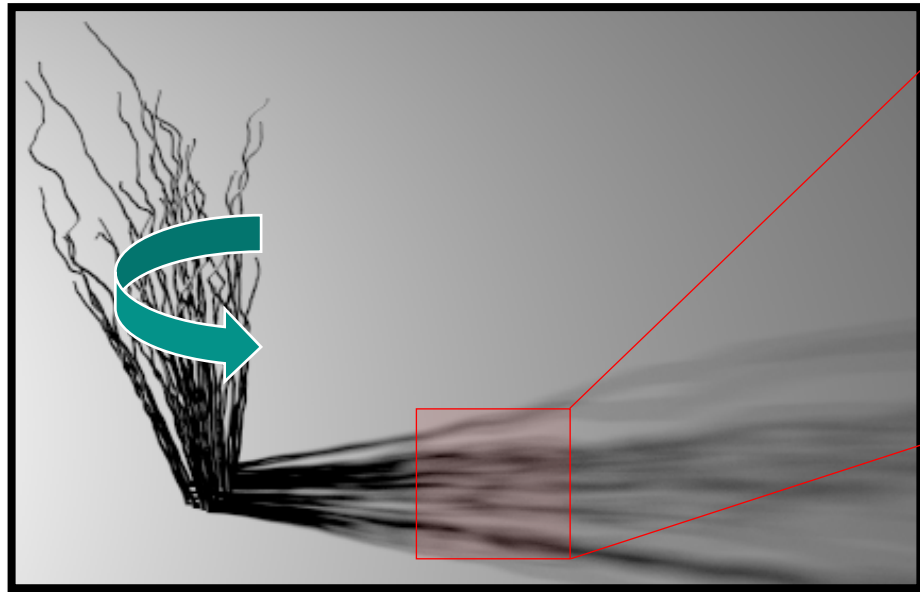


Complex geometry

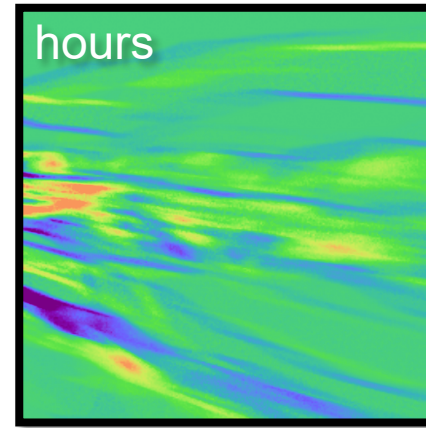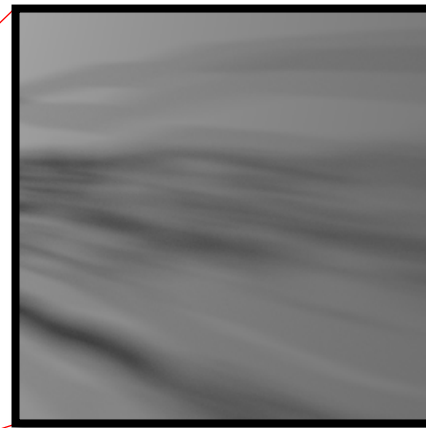


Reference




**Equal-sample
comparison**

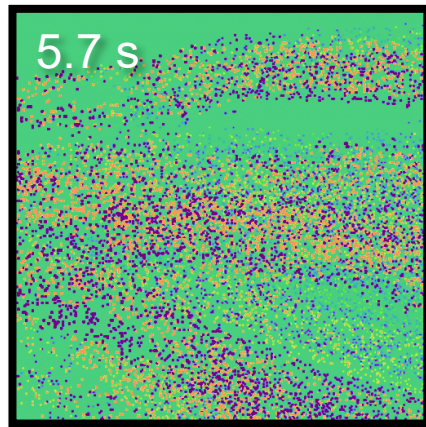

[Zhang et al. 2019]

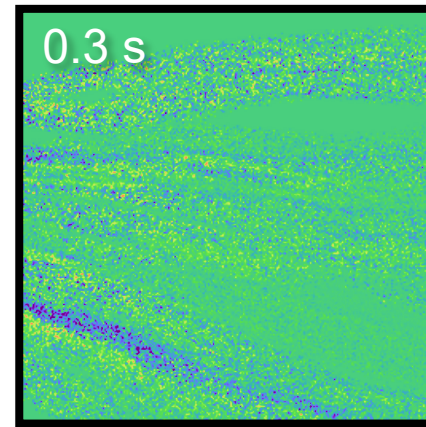


[Loubet et al. 2019]

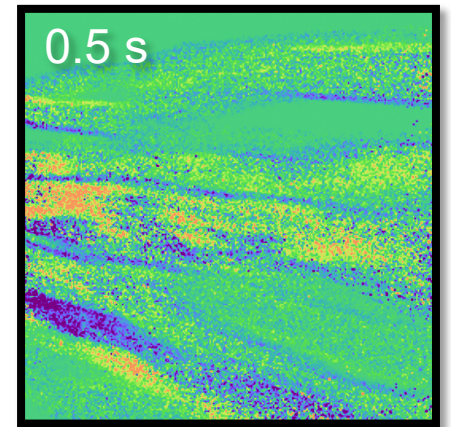


Ours

HANDLING COMPLEX GEOMETRY


Target image

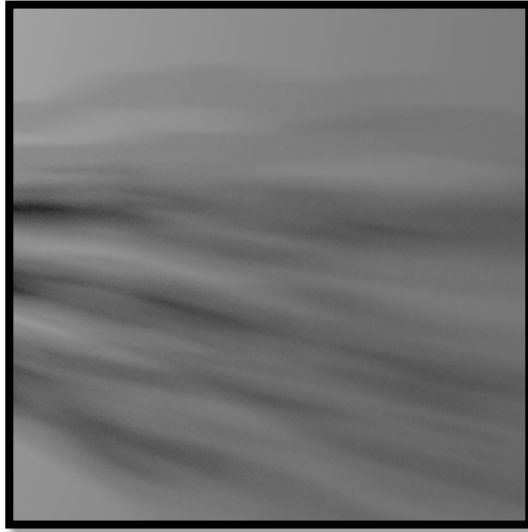



- Optimizing *rotation angle*
- **Equal-sample** per iteration
- **Identical** optimization setting
 - Learning rate (Adam)
 - Initializations

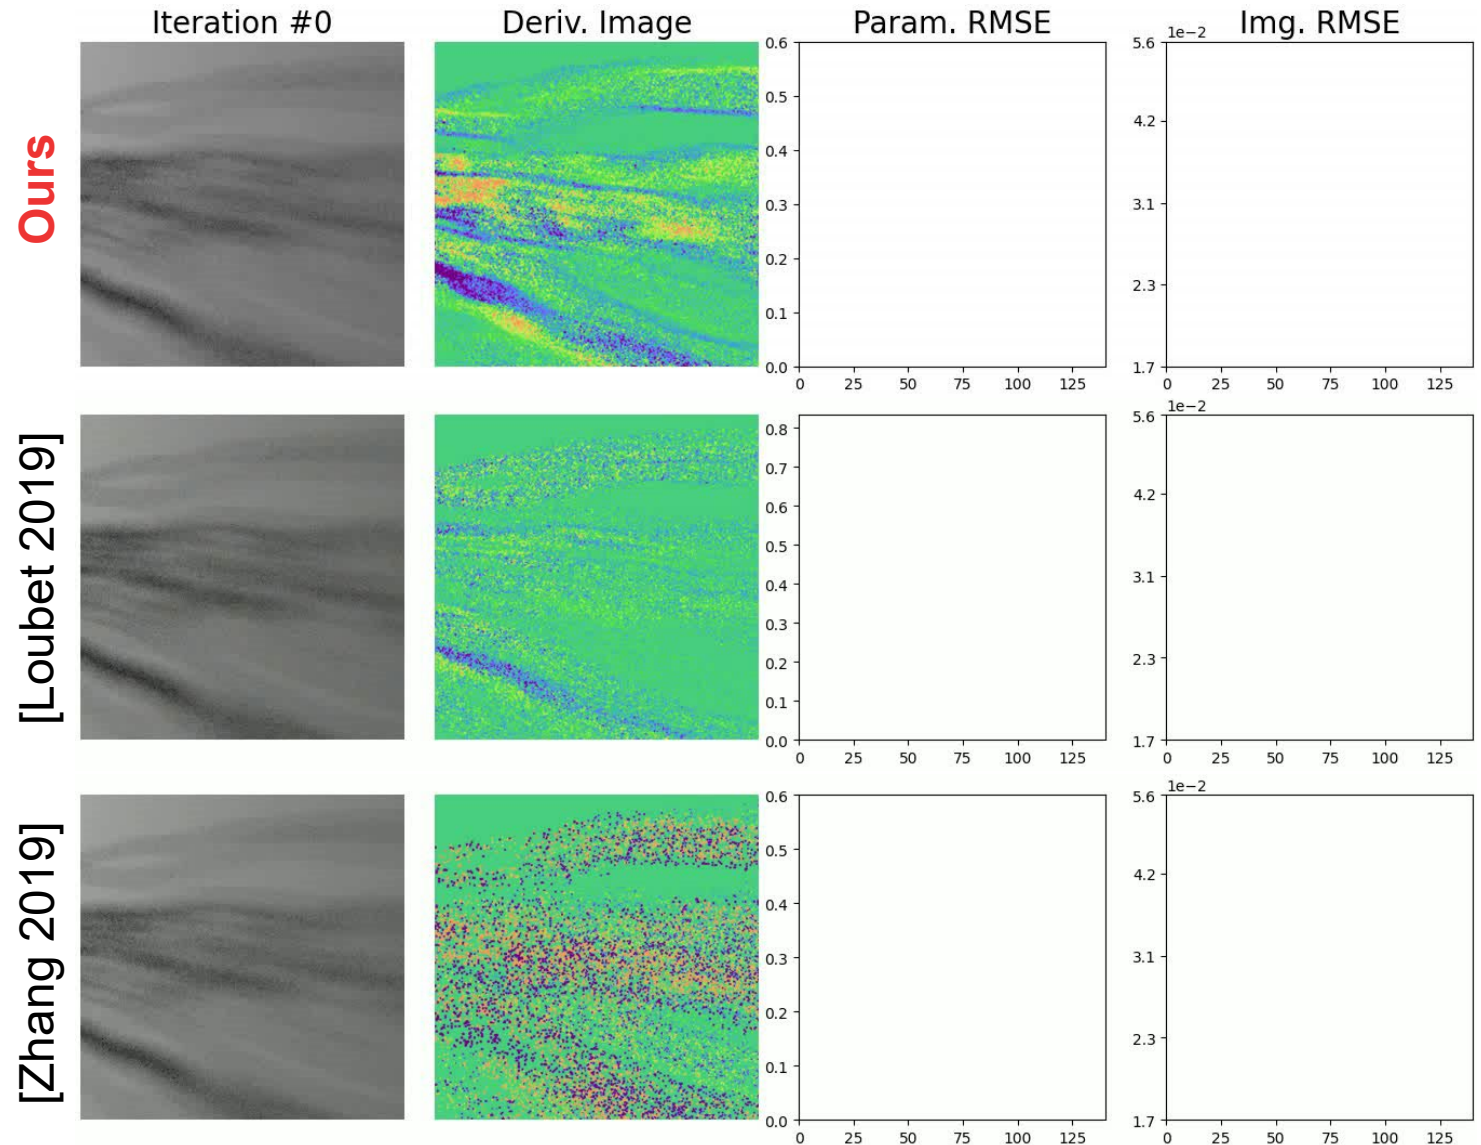

HANDLING CAUSTICS

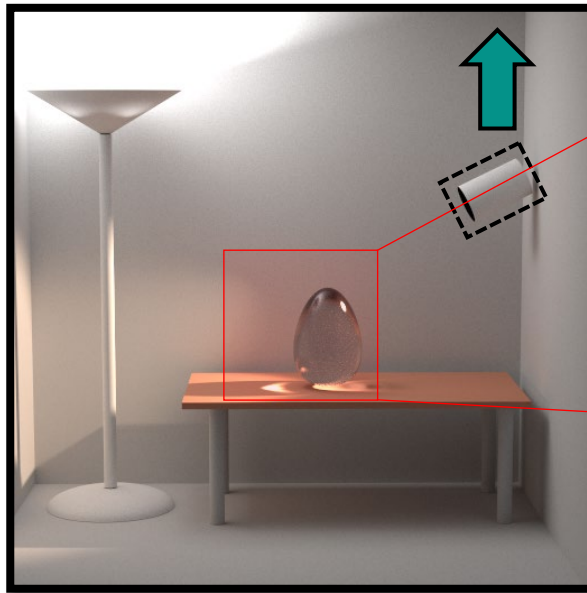


Complex light transport effects

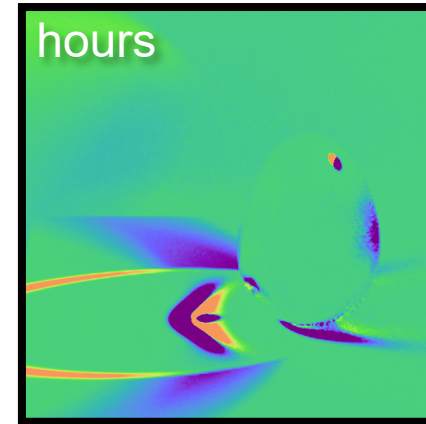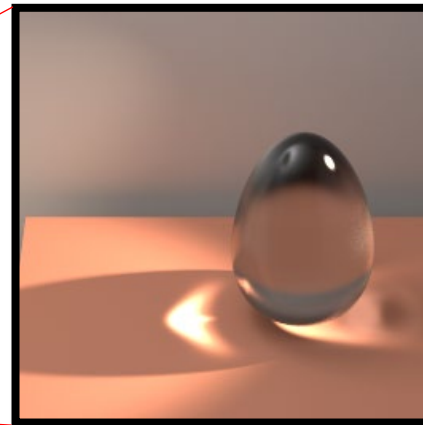


Reference




Equal-sample
comparison

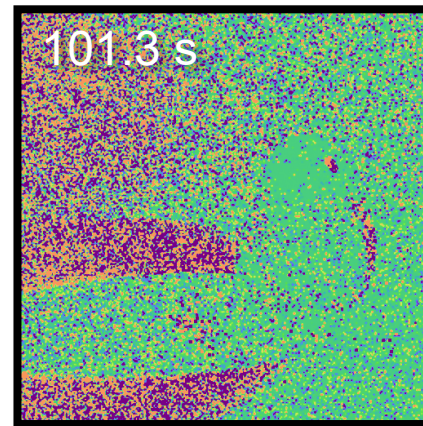

[Zhang et al. 2019]


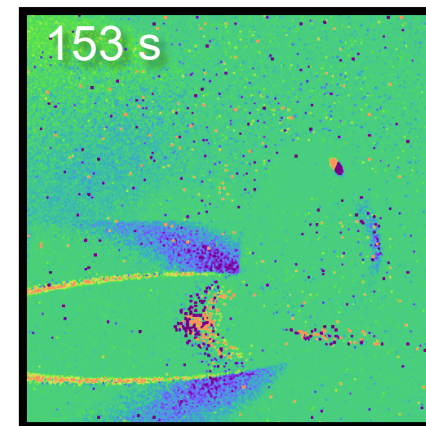


[Loubet et al. 2019]

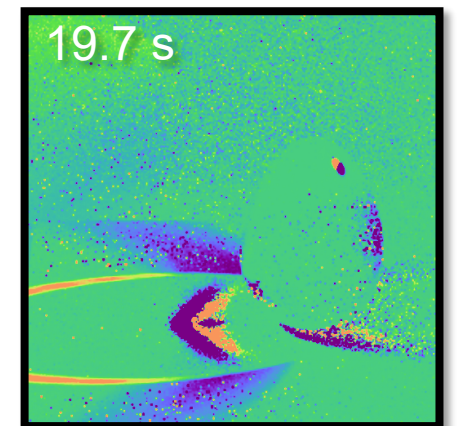


Ours

HANDLING CAUSTICS

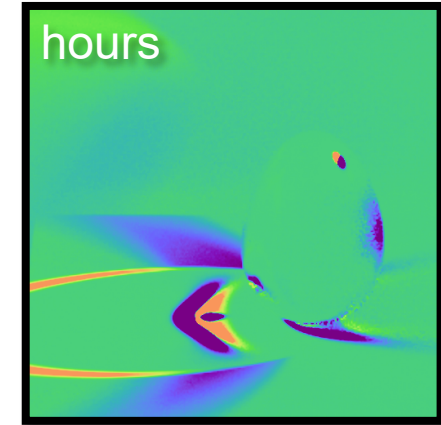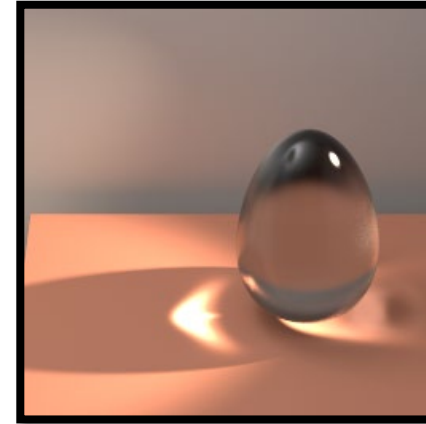


Reference


Equal-sample comparison

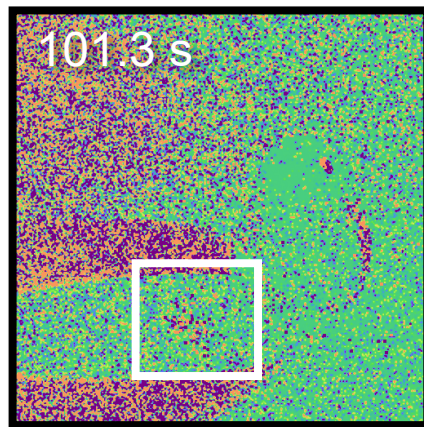


[Zhang et al. 2019]

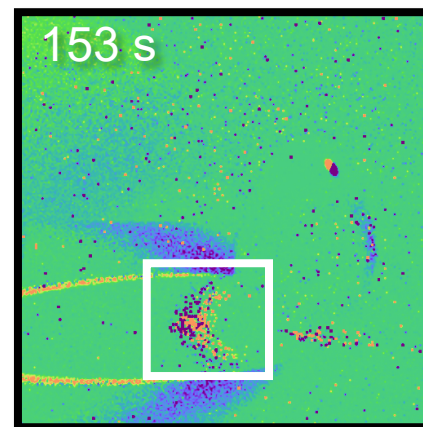

[Loubet et al. 2019]

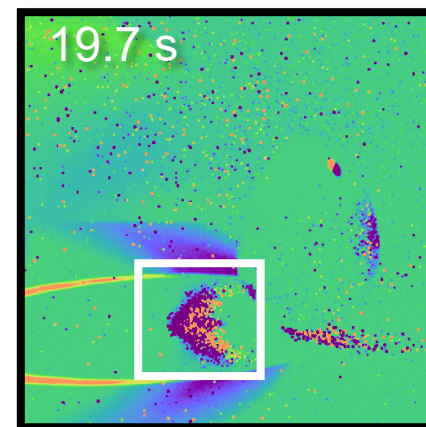


Ours (unidirectional)

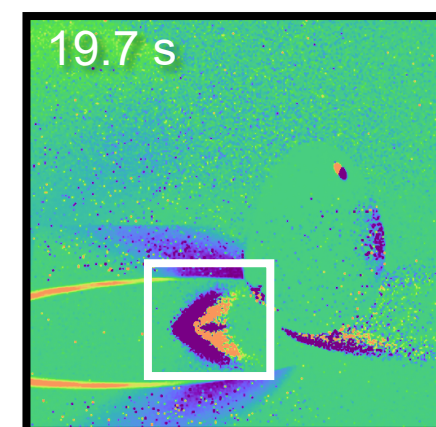


Ours (bidirectional)

HANDLING CAUSTICS

Target image


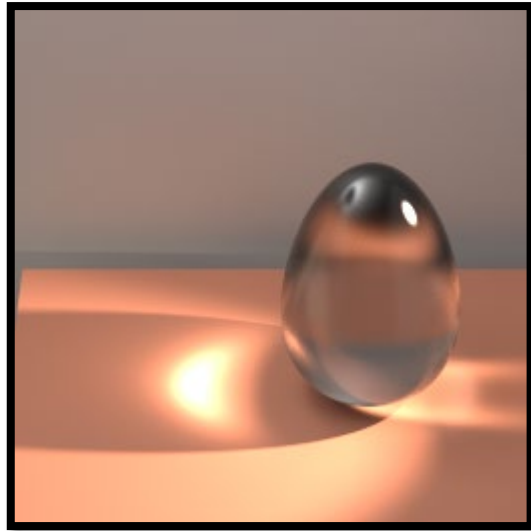


- Optimizing
 - Glass IOR
 - Spotlight position
- **Equal-time** per iteration
- **Identical** optimization setting

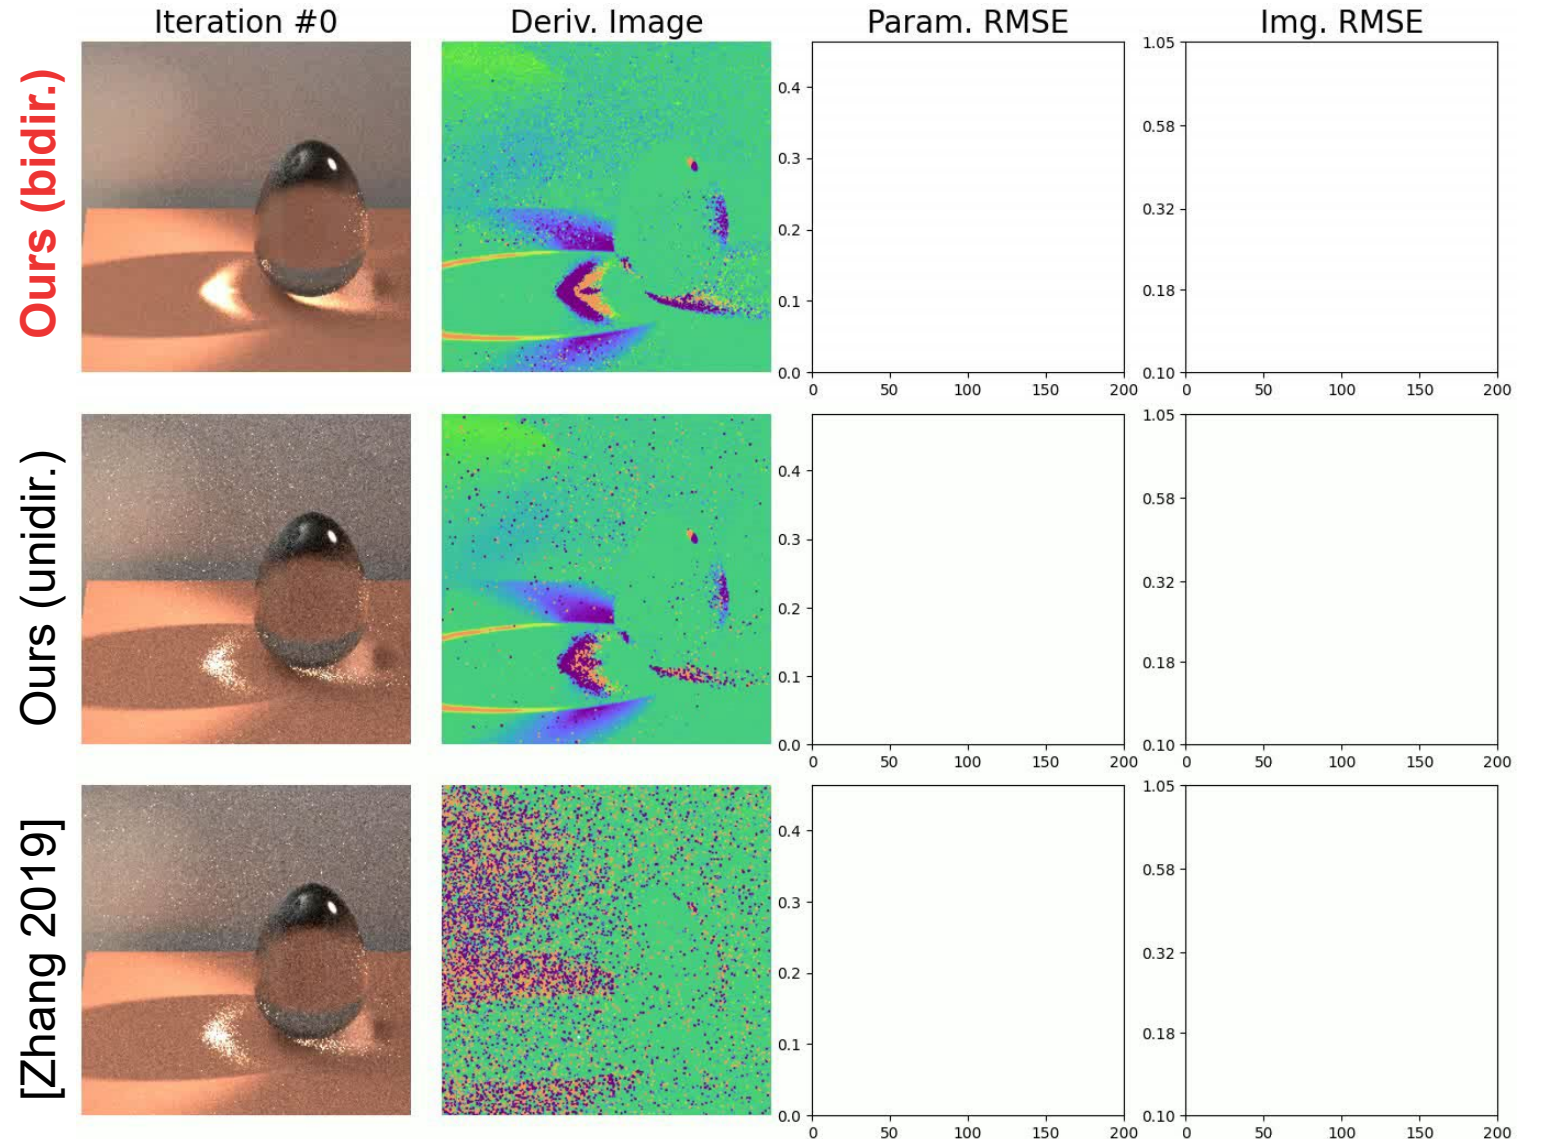


SHAPE OPTIMIZATION

Initial

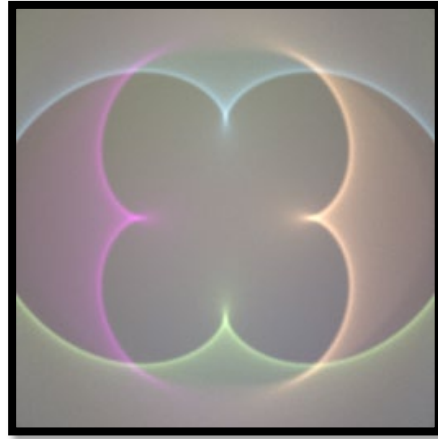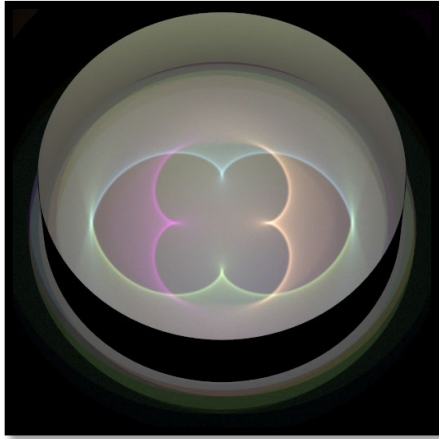


Optimizing **cross-sectional** shape (100 variables)


Target image

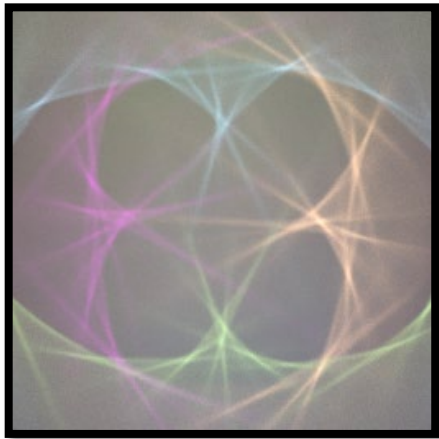

Iter #0

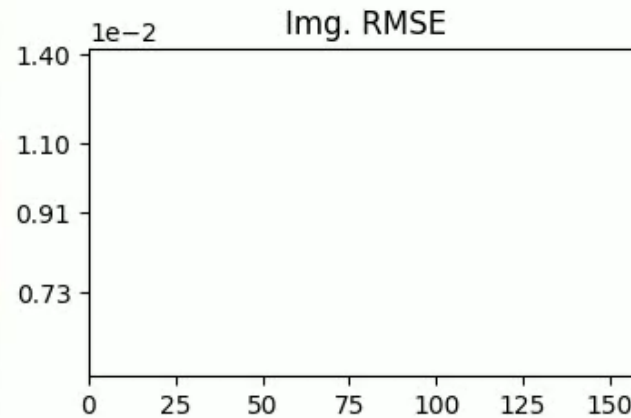


Cross-sectional shape (displacement x 20)

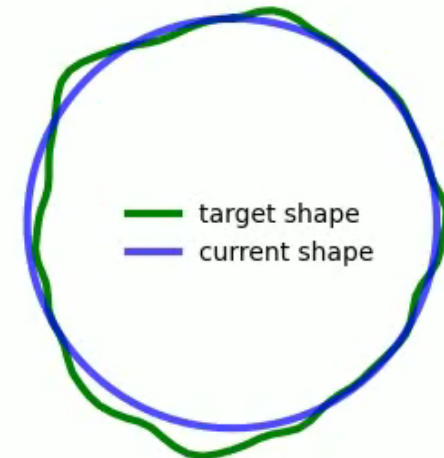


RESULTS


Original image

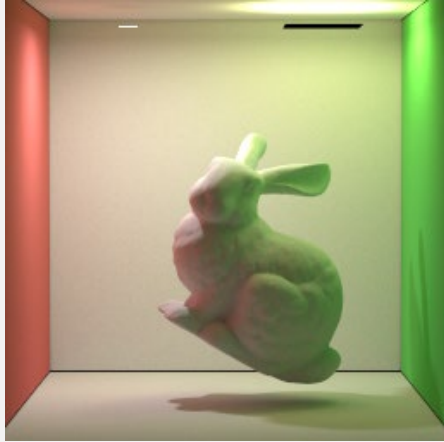


Derivative image

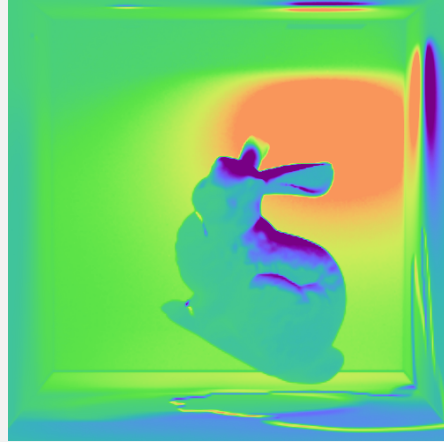


Original image

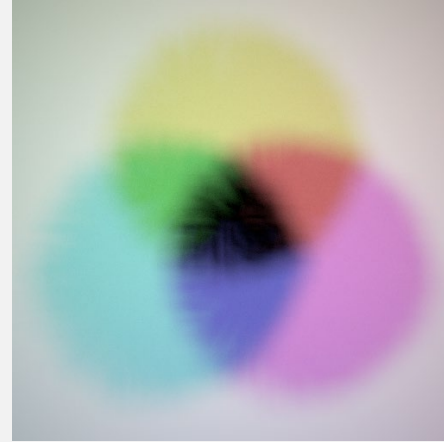


Derivative image

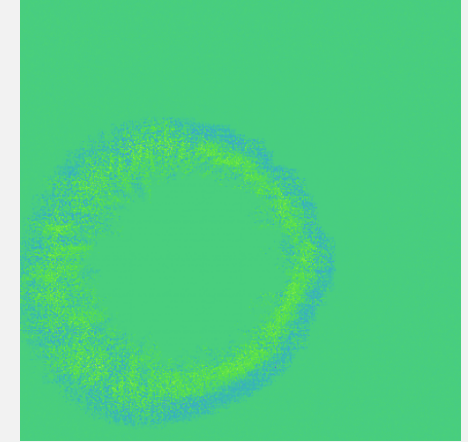


Config.

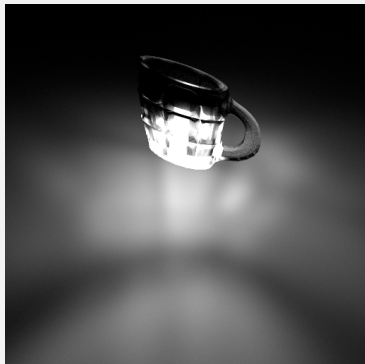


Optimize (initial)

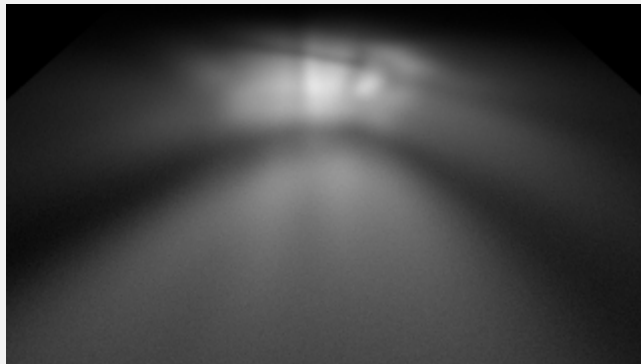

Optimize (final)

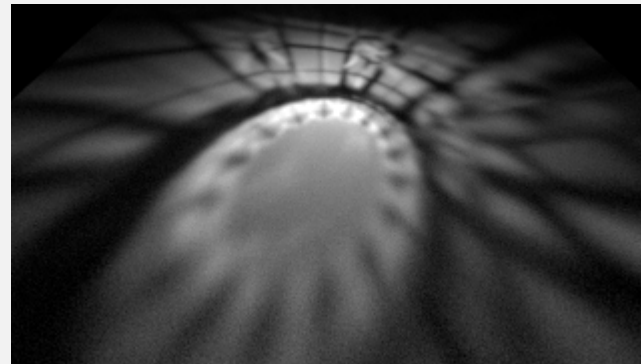

Target




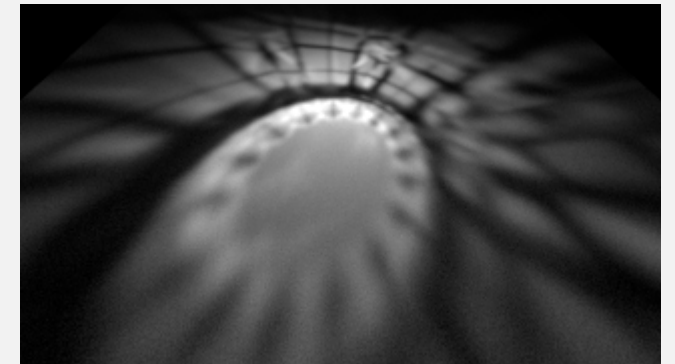


Applications

Inverse scattering [Gkioulekas et al. 2013]




Acquisition setup

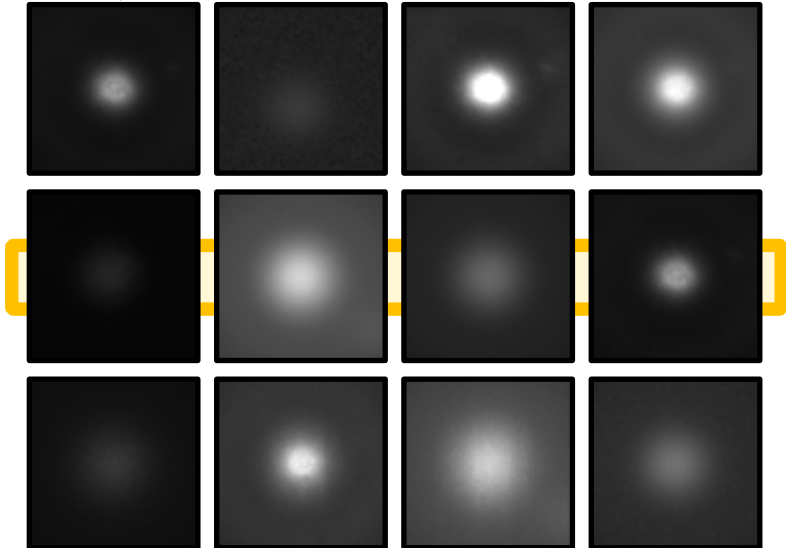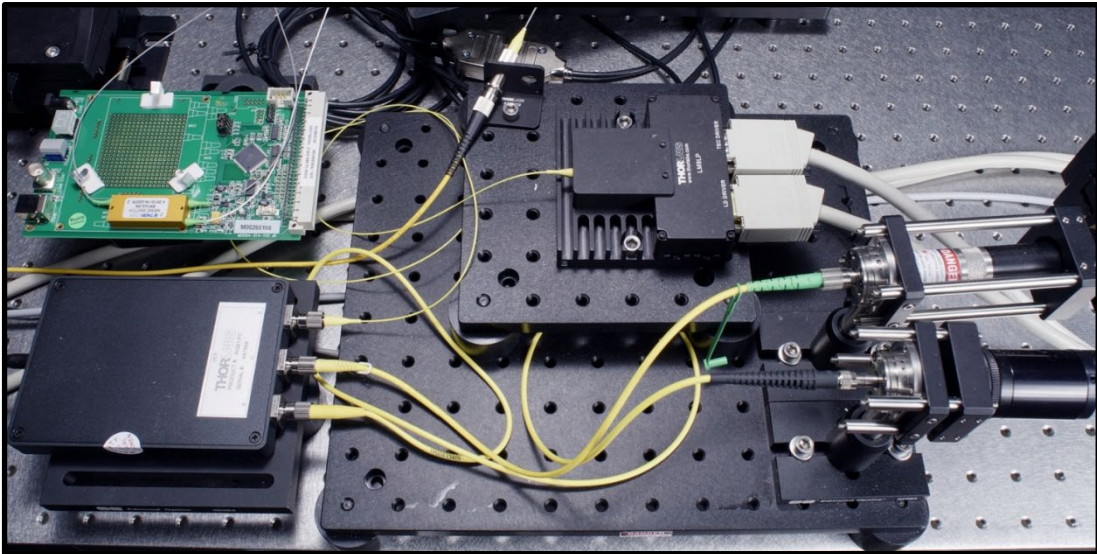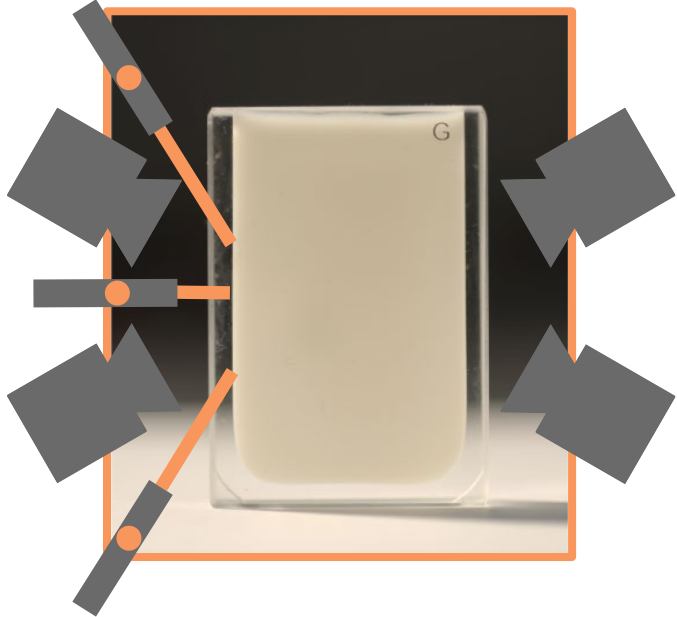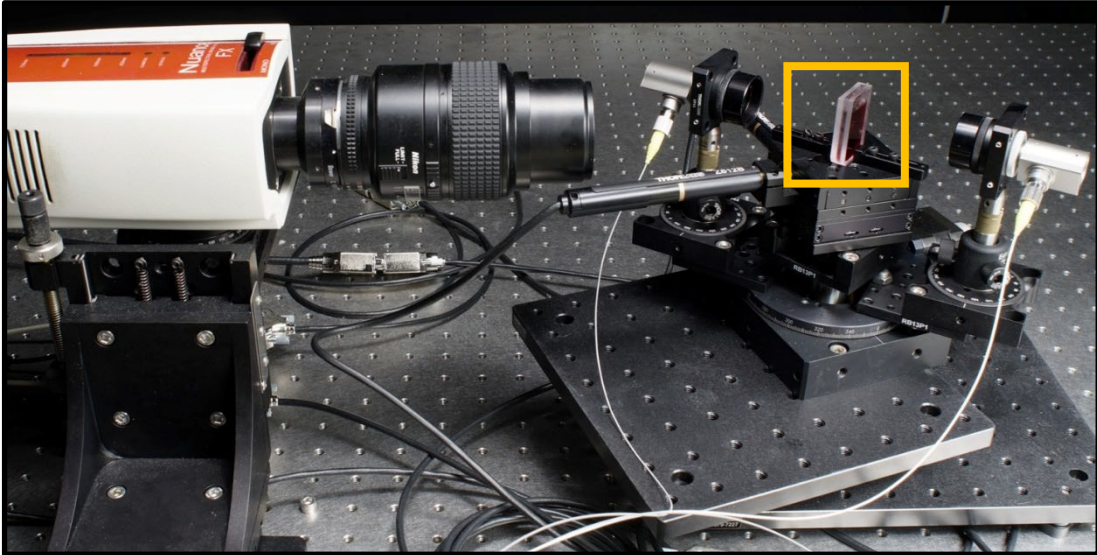

Invert using differentiable rendering

Synthetic renderings

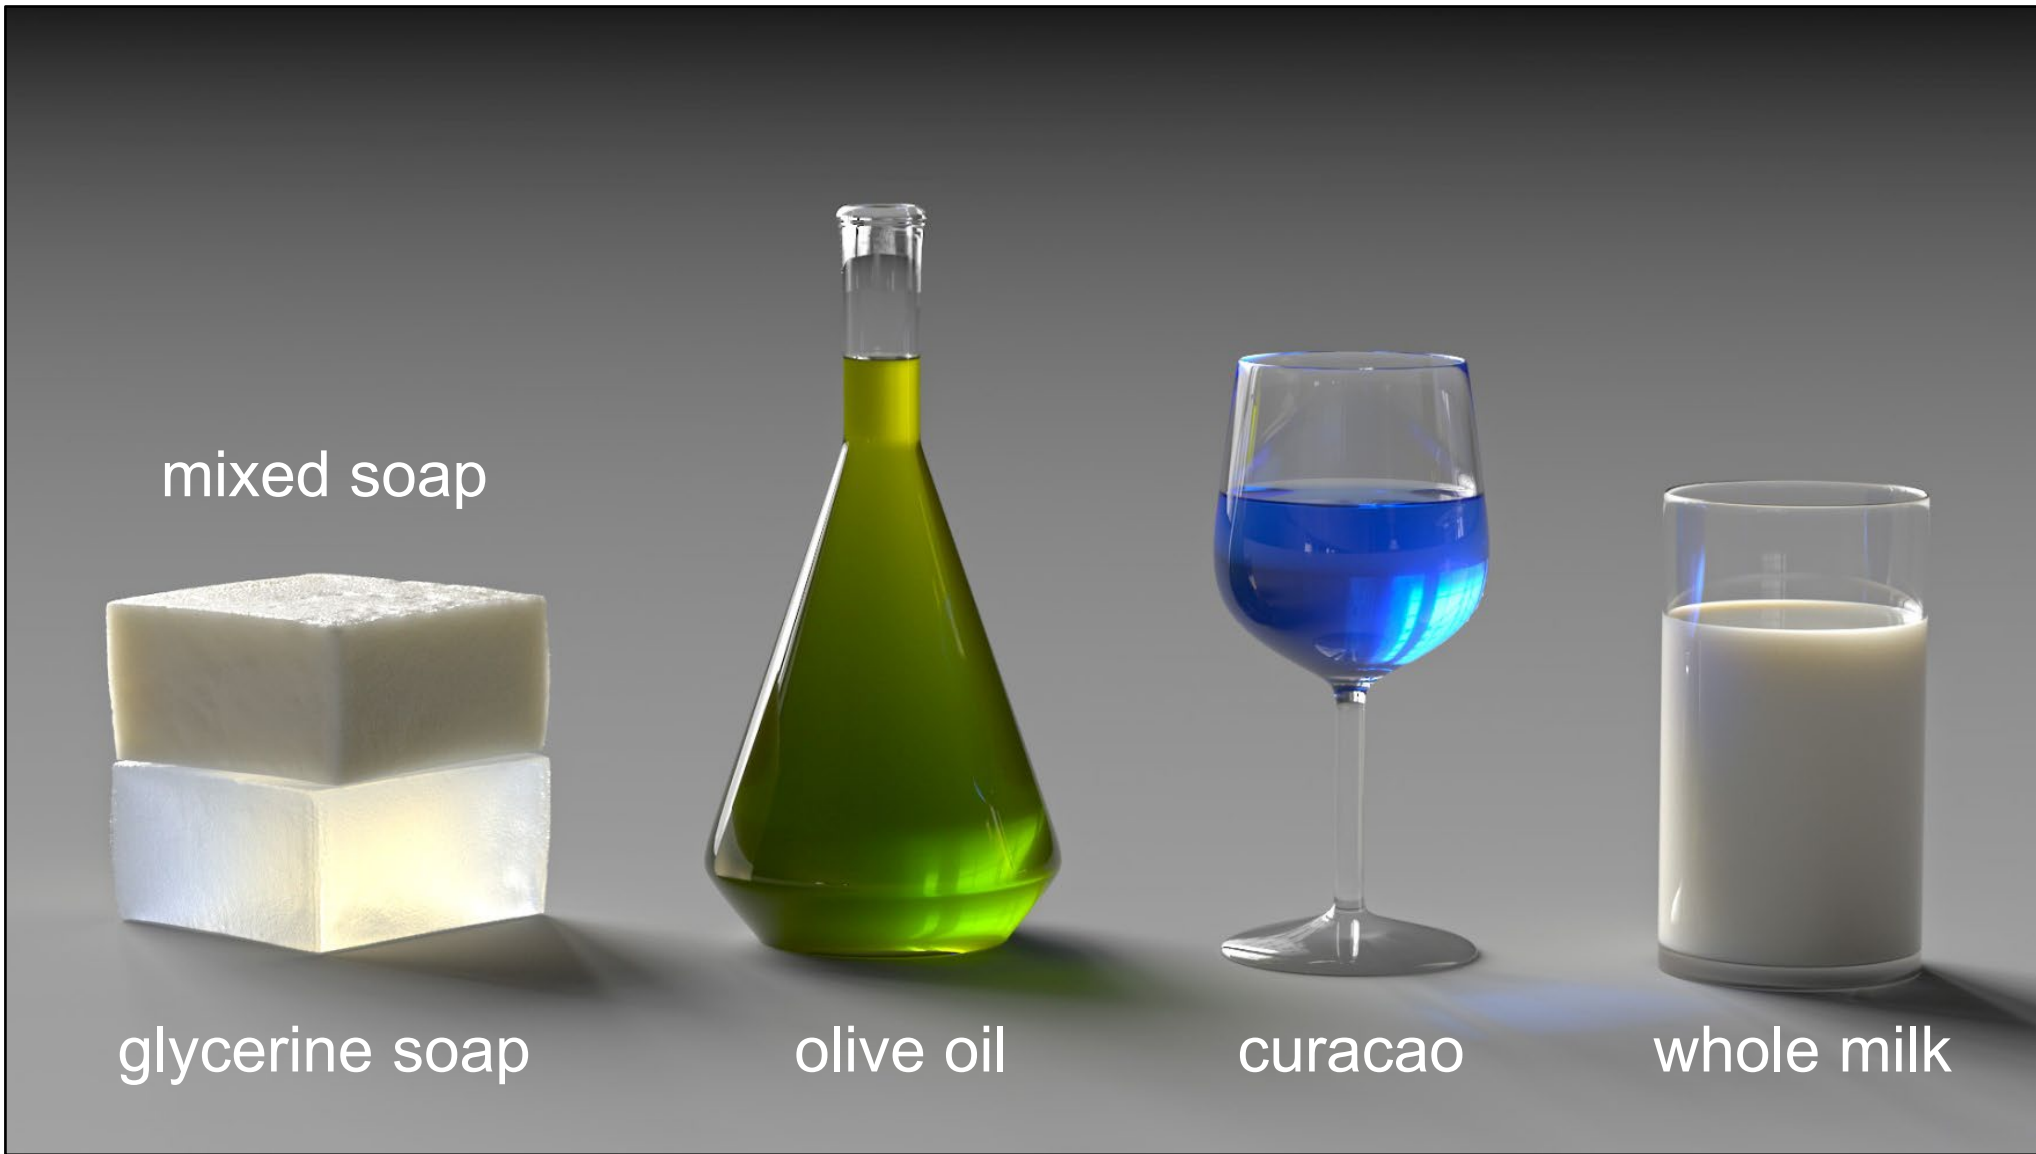

mixed soap



glycerine soap



olive oil




curacao



whole milk



Inverse transport networks [Che et al. 2020]

- Integrate physics-based rendering into **machine learning** pipeline
- Predict scattering parameters from images

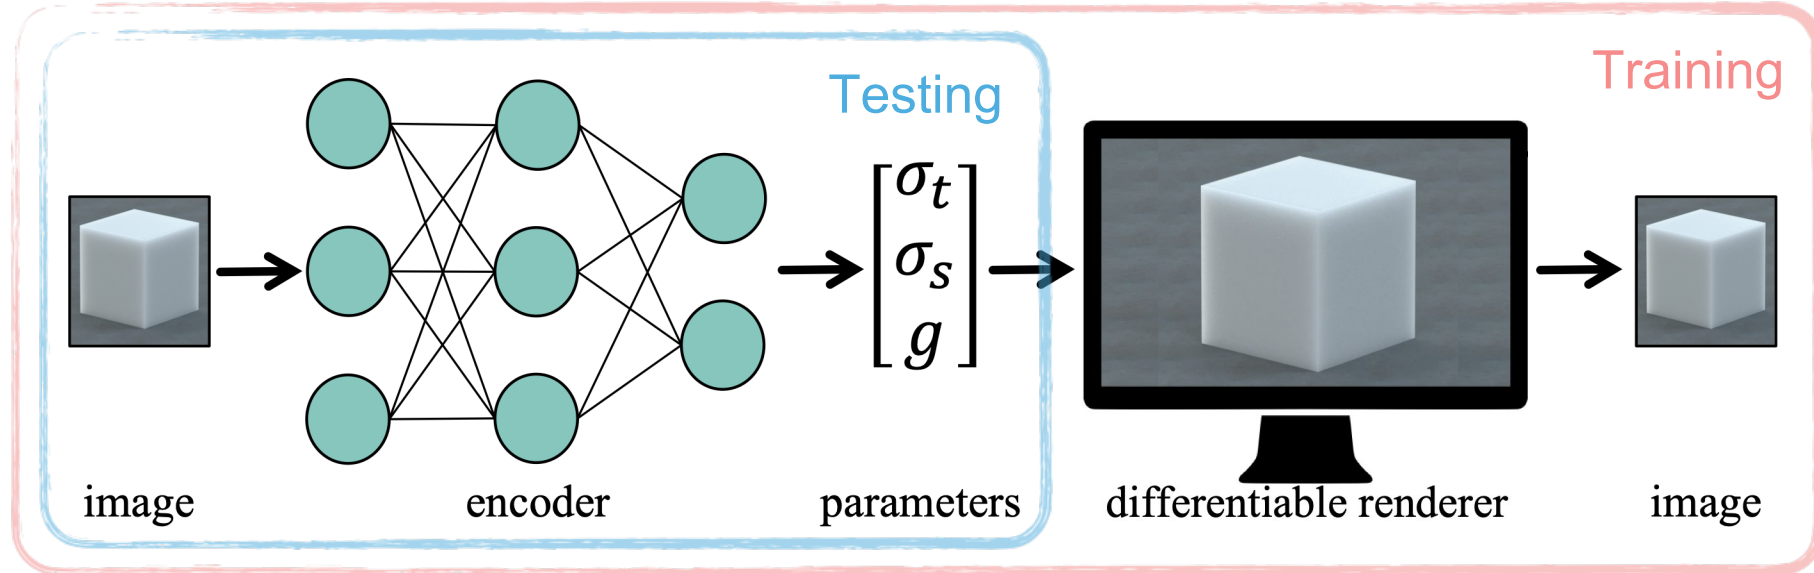


- Utilize *image loss* provided by a volume path tracer to regularize training
- Use the trained encoder to perform inverse scattering during testing

Groundtruth

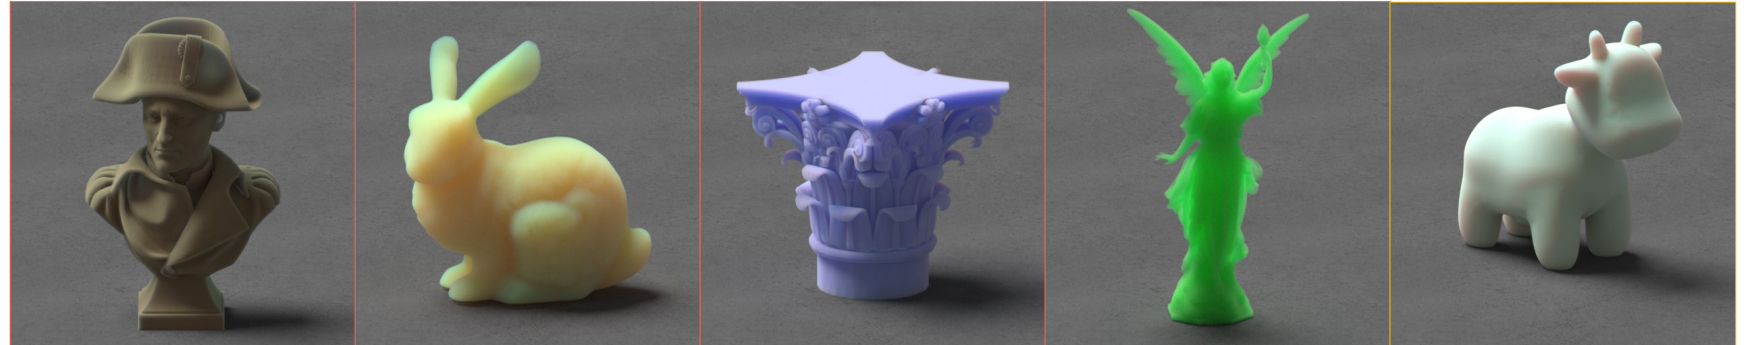


Inverse transport network

parameter loss: 0.60x
appearance loss: 0.40x
novel appearance loss: 0.42x

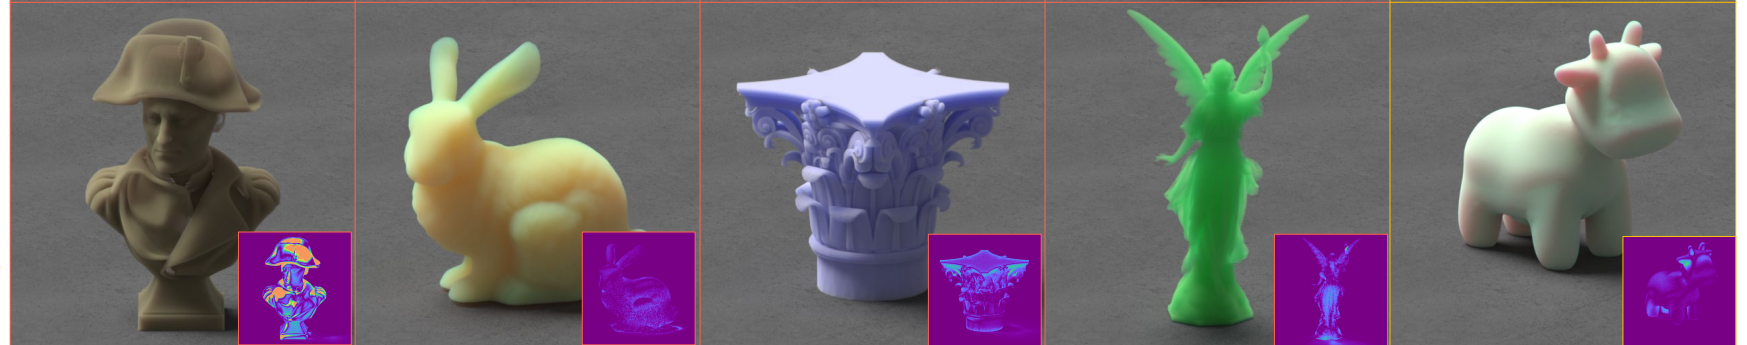


Baseline

parameter loss: 1x
appearance loss: 1x
novel appearance loss: 1x

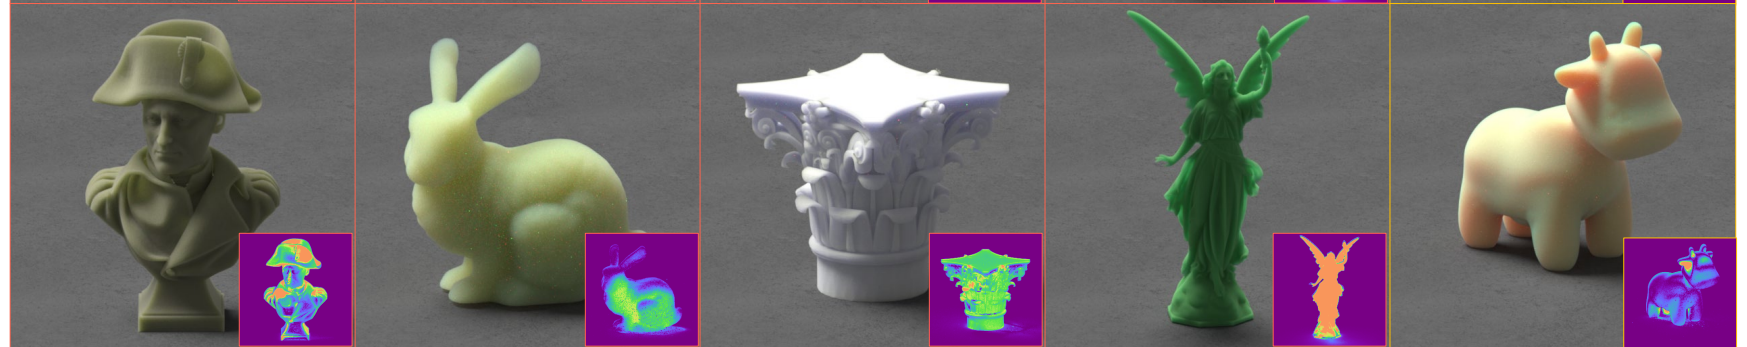


Optical tomography [Gkioulekas et al. 2015]

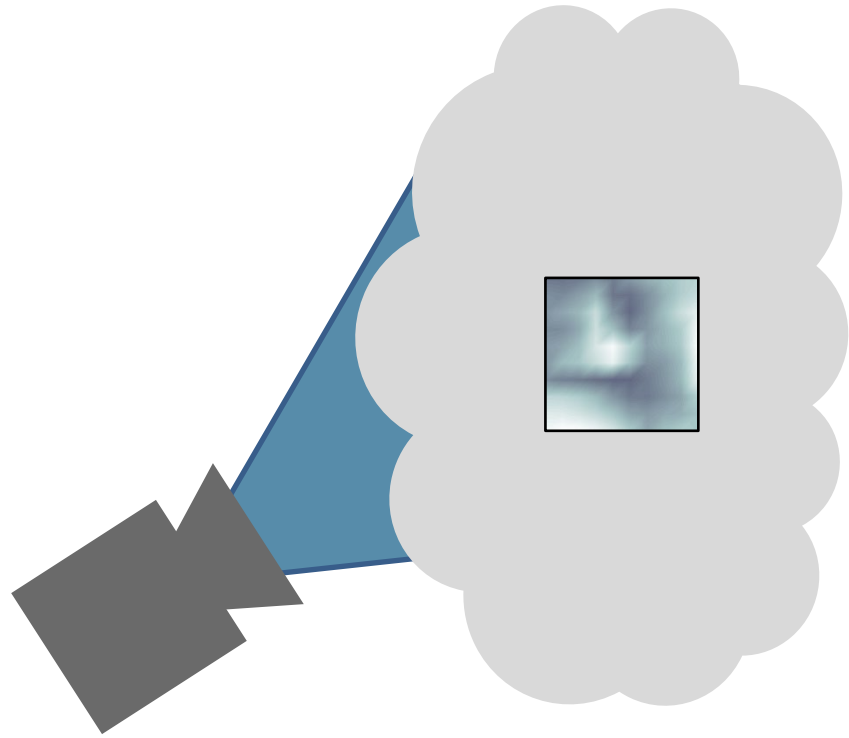


camera

thick smoke cloud

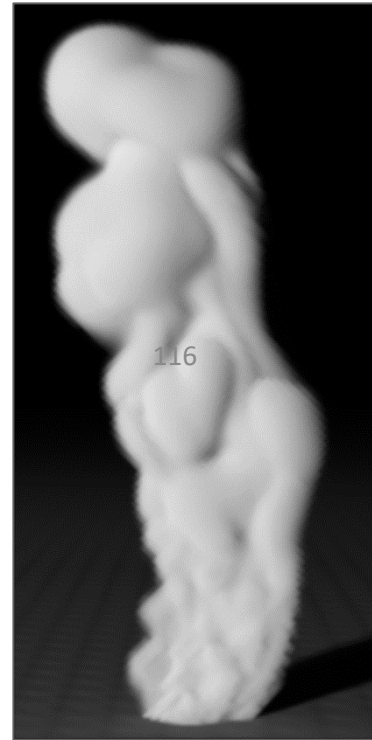

simulated camera
measurements



reconstructed
cloud volume




slice through
the cloud


Active area of research



industrial dispersions
[Gkioulekas et al. 2013]

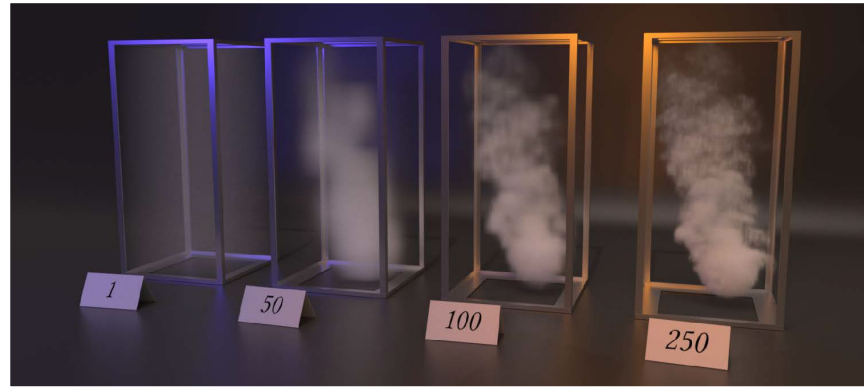

efficient algorithms
[Nimier-David et al. 2019, 2020]

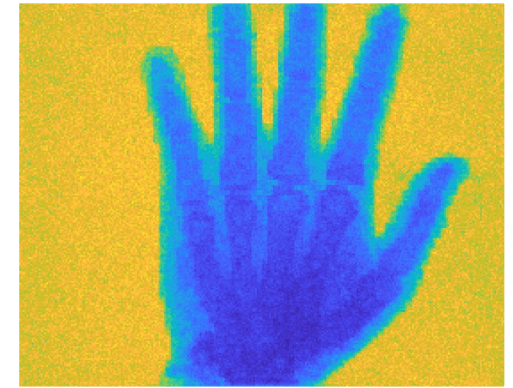


computed tomography
[Geva et al. 2018]



woven fabrics
[Khungurn et al. 2015,
Zhao et al. 2016]





3D printing
[Elek et al. 2019,
Nindel et al. 2021]

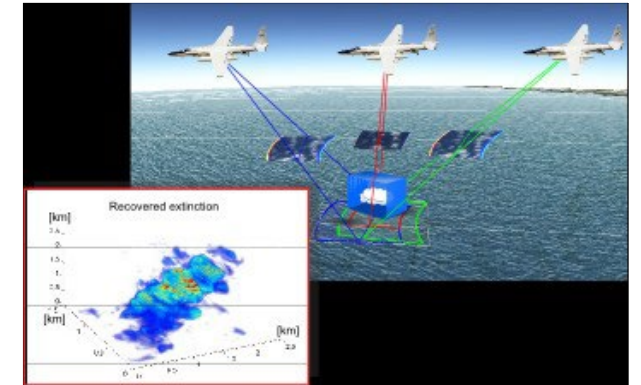



cloud tomography
[Levis et al. 2015,
2017, 2020]

Non-line-of-sight (NLOS) imaging

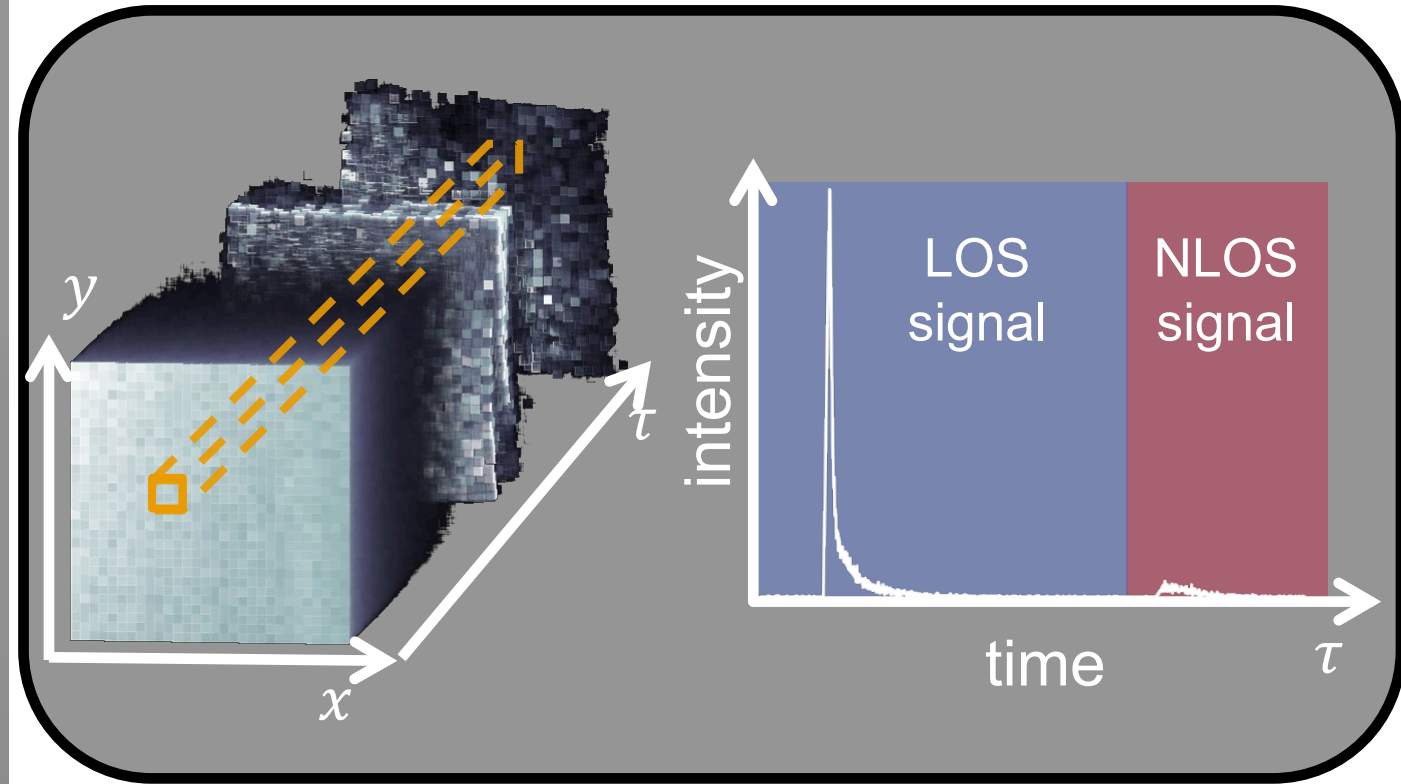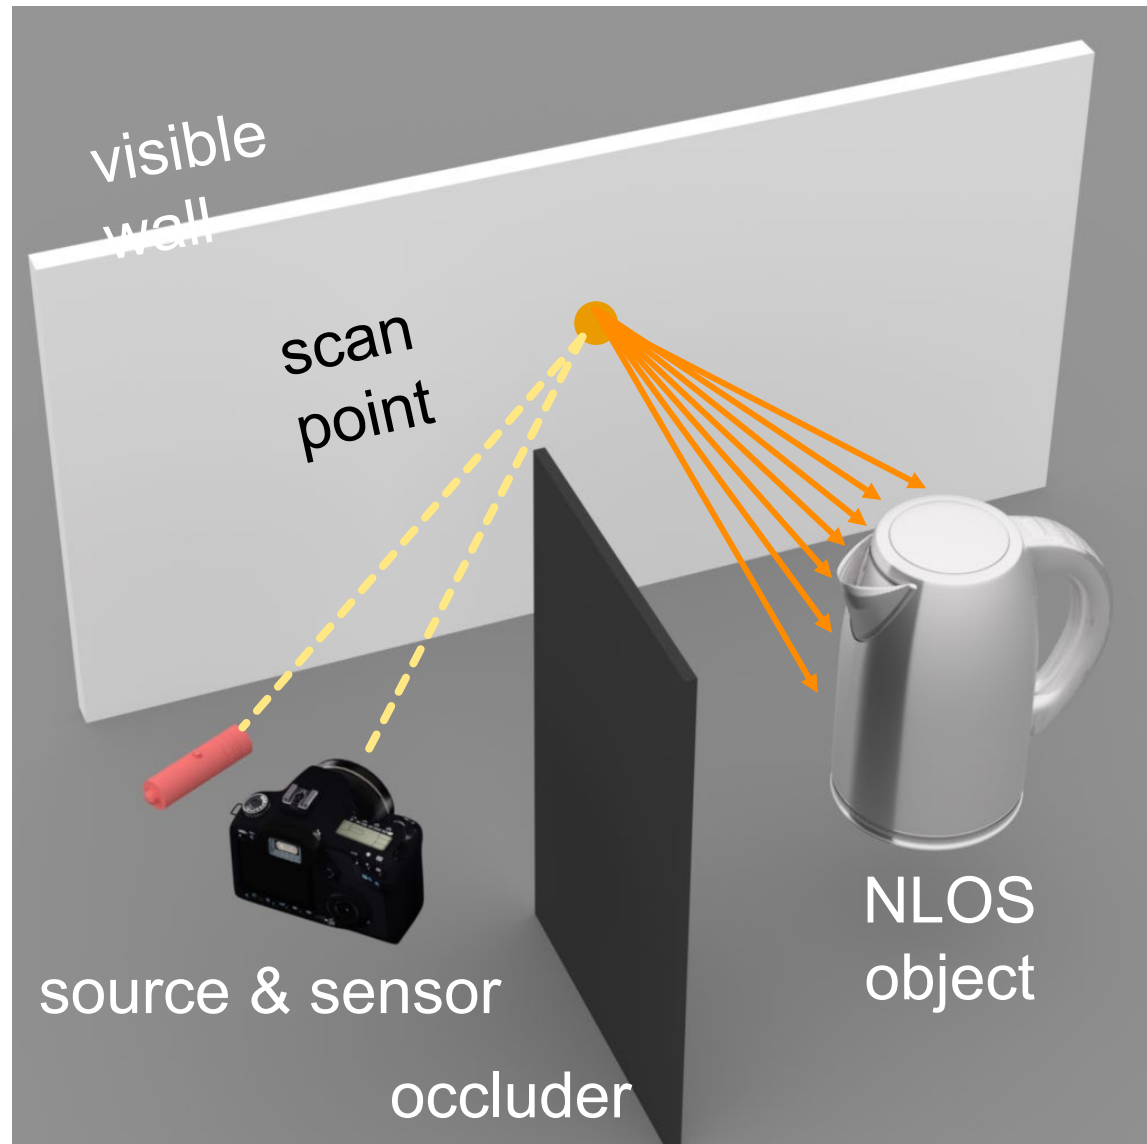


Time-of-flight measurements


SPAD-based lidar

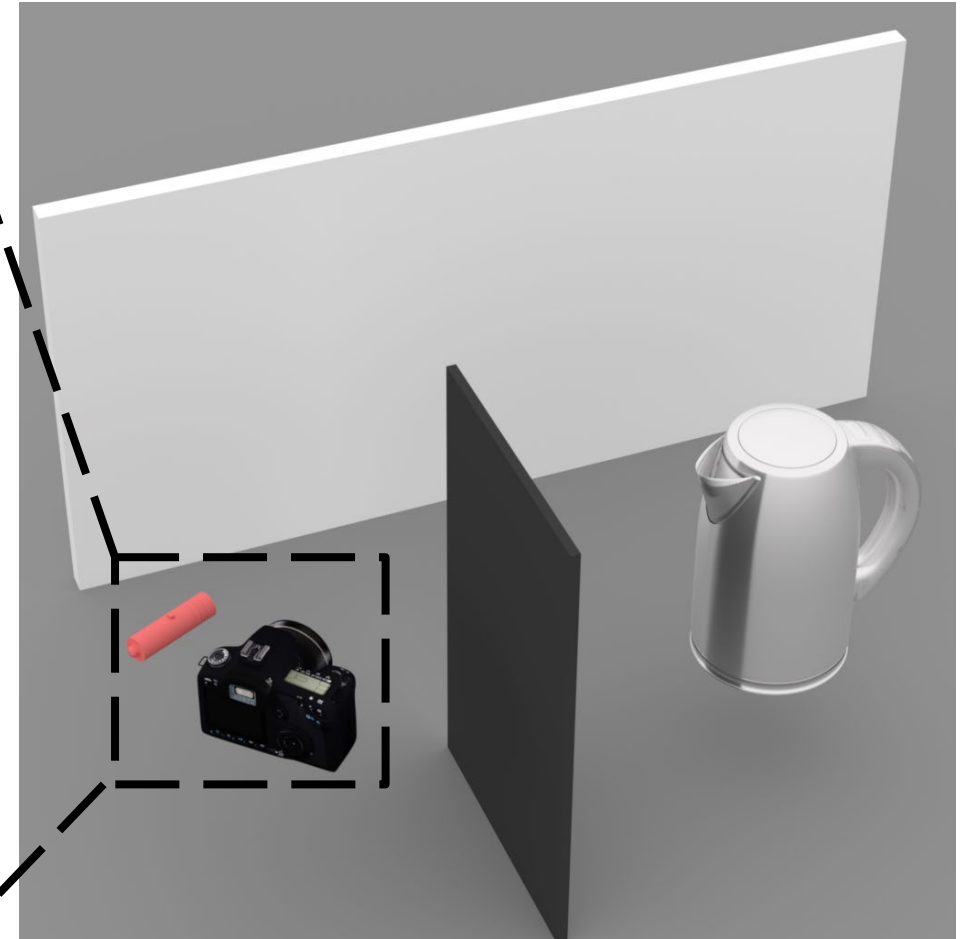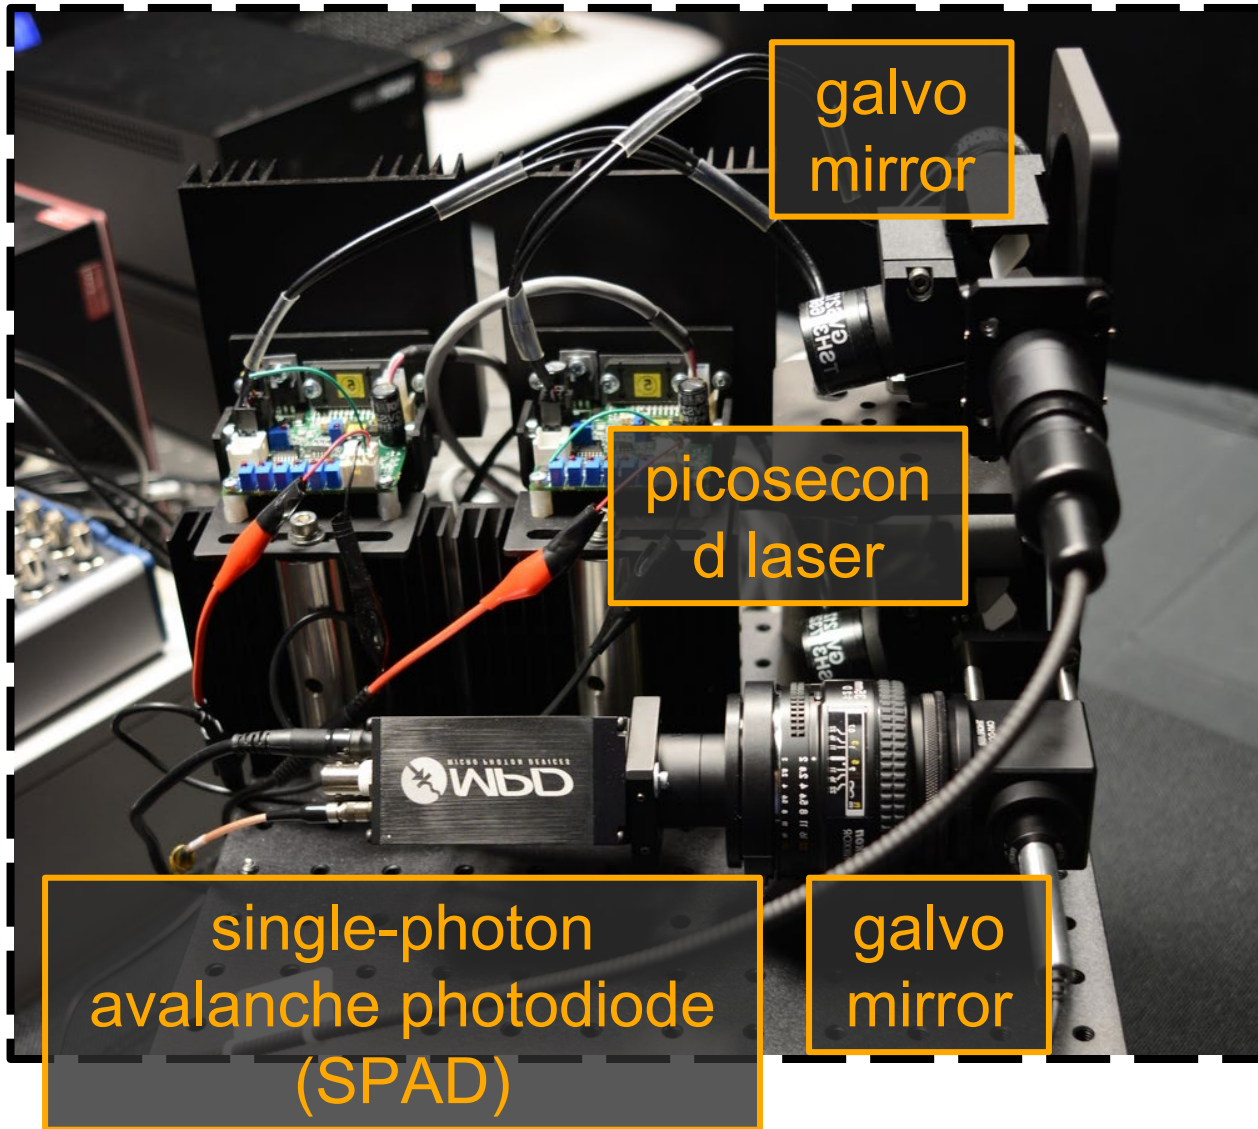


NLOS shape optimization [Tsai et al. 2019]

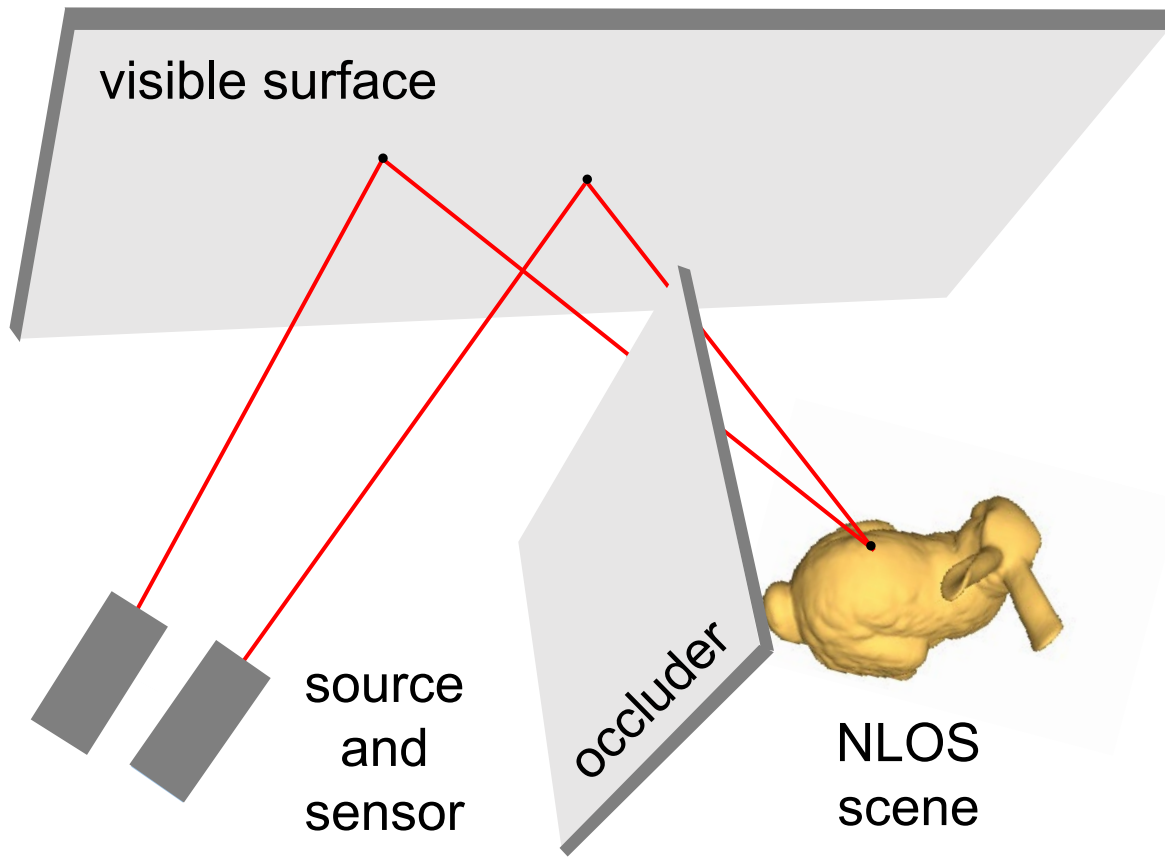

Simulated time-of-flight data

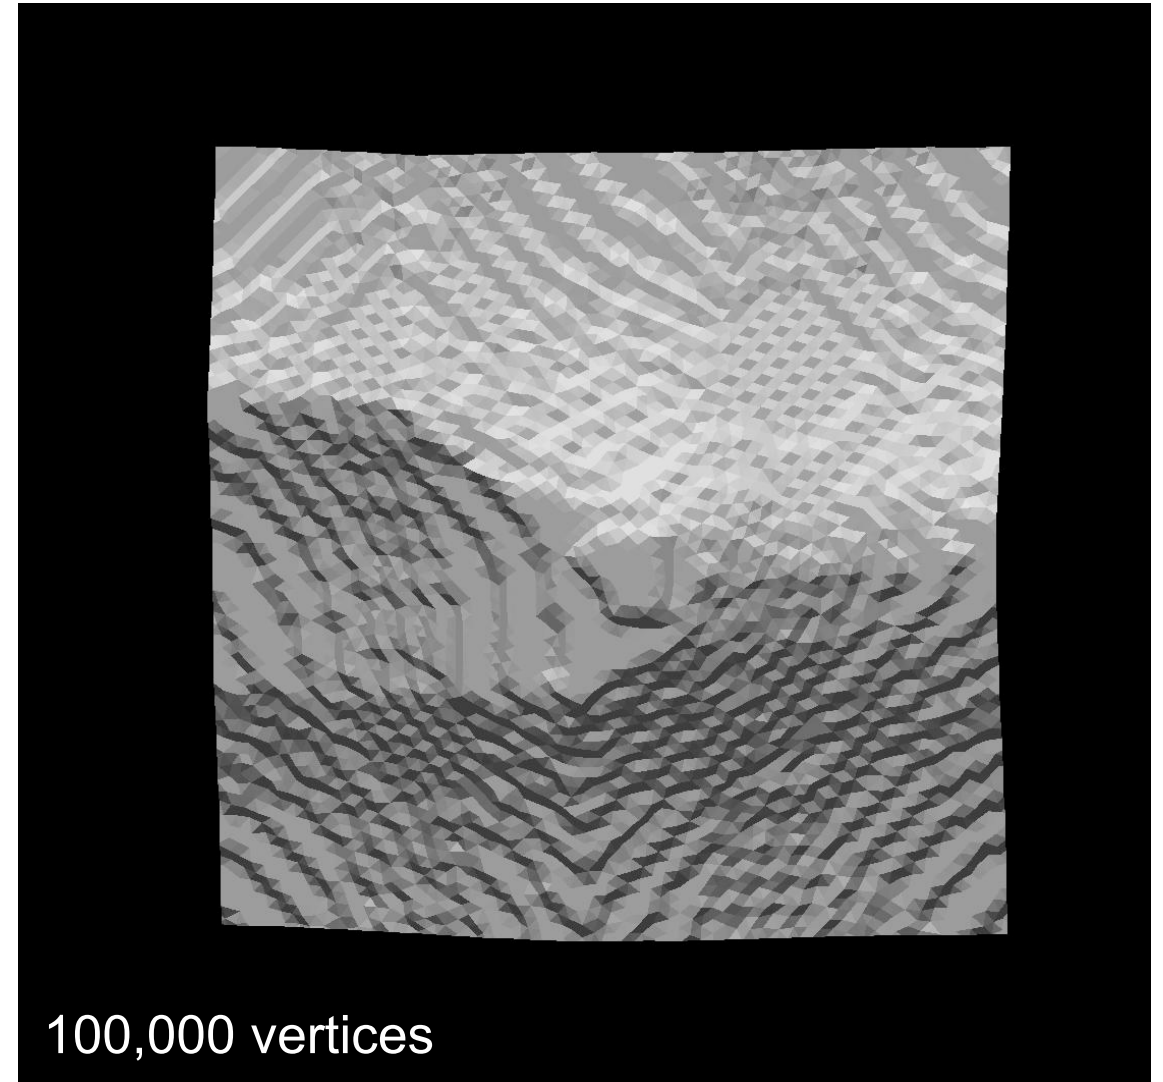


NLOS shape optimization [Tsai et al. 2019]

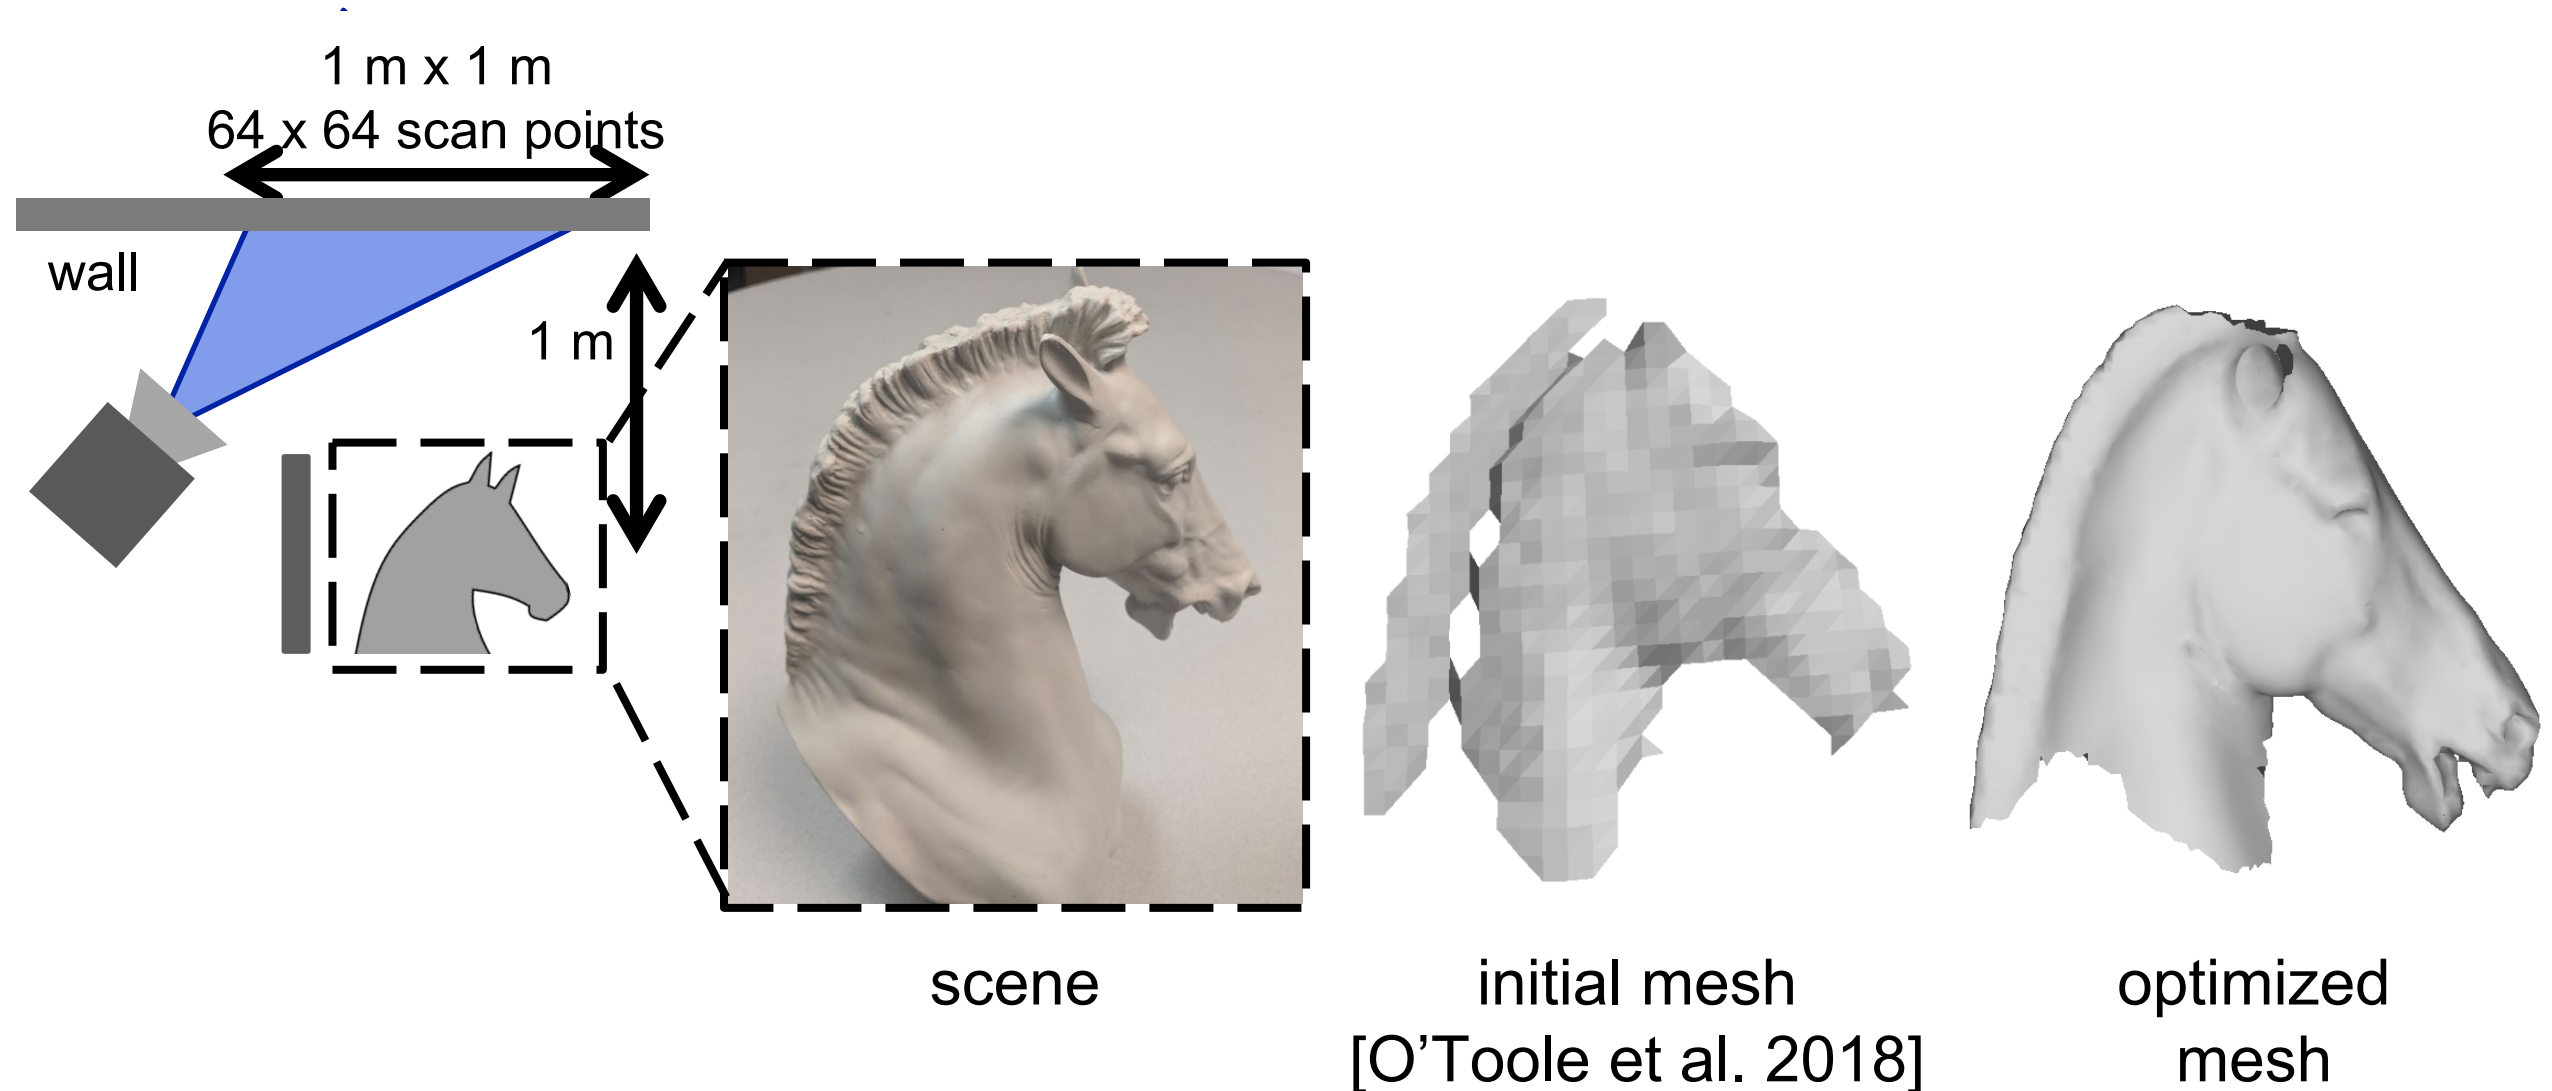


Reflectometry from interreflections [Shem-Tov et al. 2020]

Direct illumination measurements

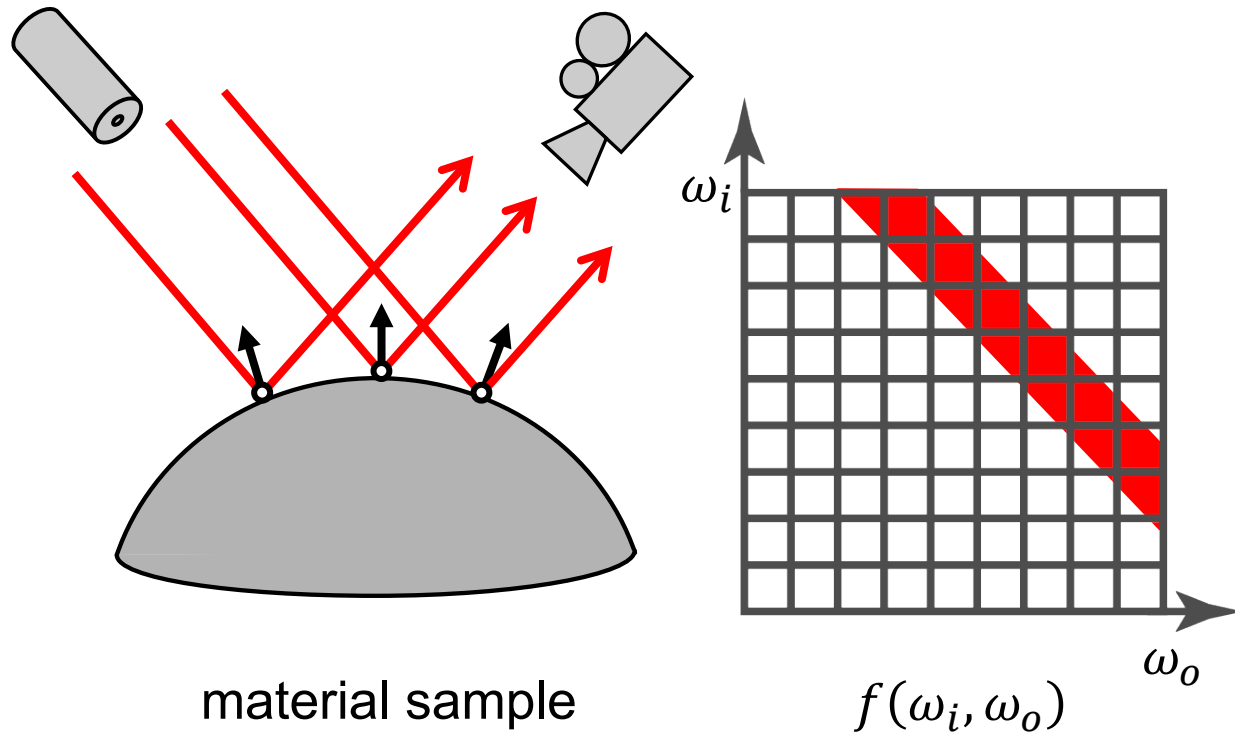

- + Intensities map directly to BRDF entries
- Many measurements (2D scan of light & camera)









Global illumination measurements

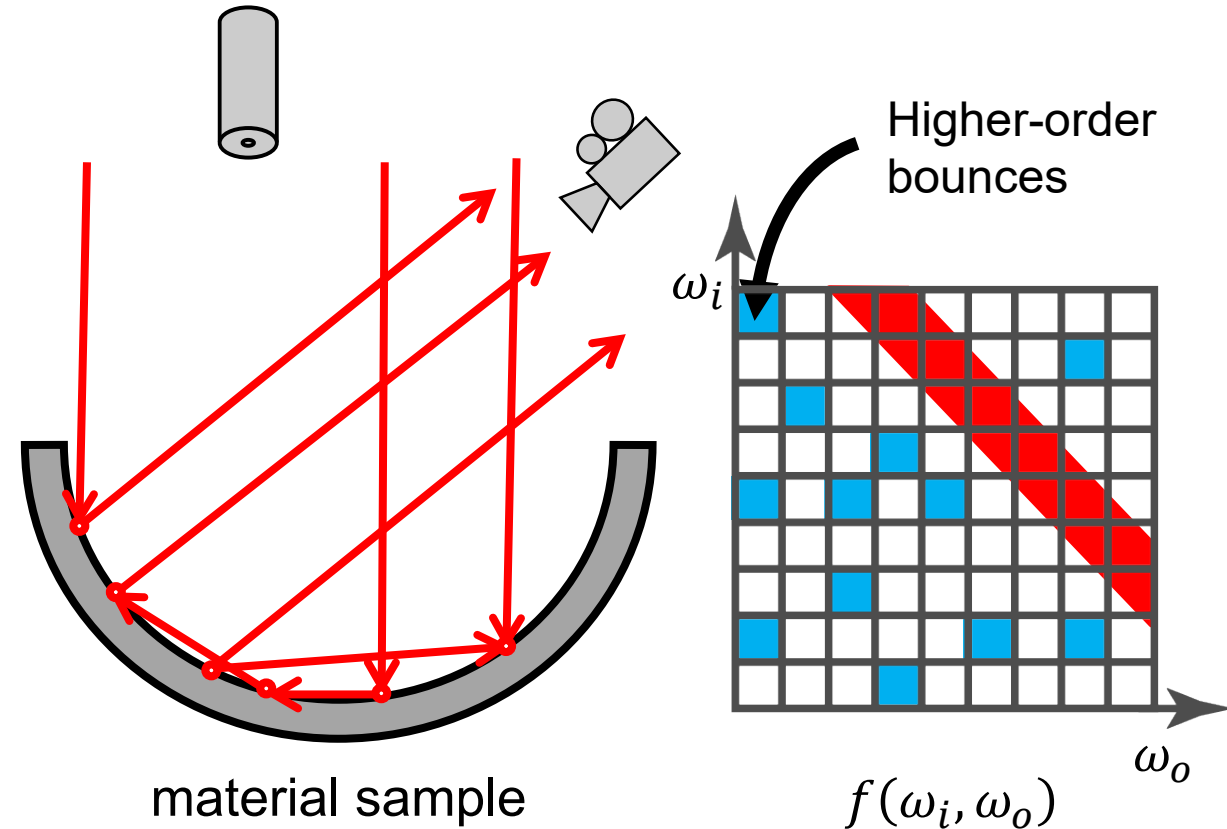

- + Fewer measurements (single image)
- Non-linear analysis-by-synthesis optimization

Solvable using differentiable rendering

Single-image dense BRDF sampling

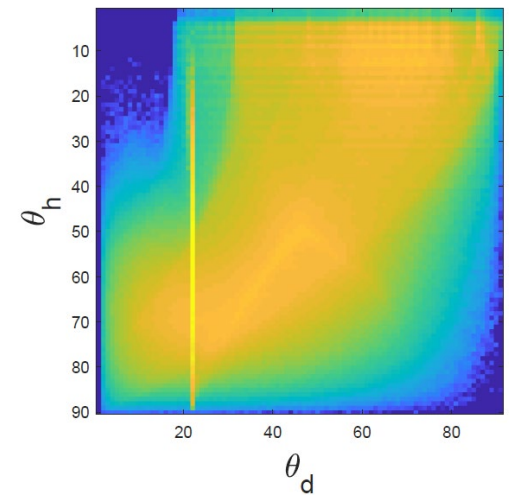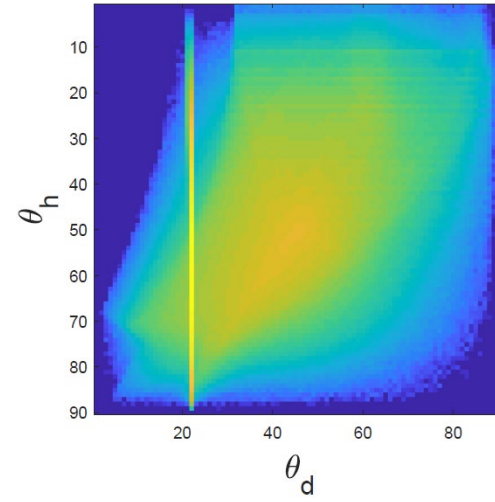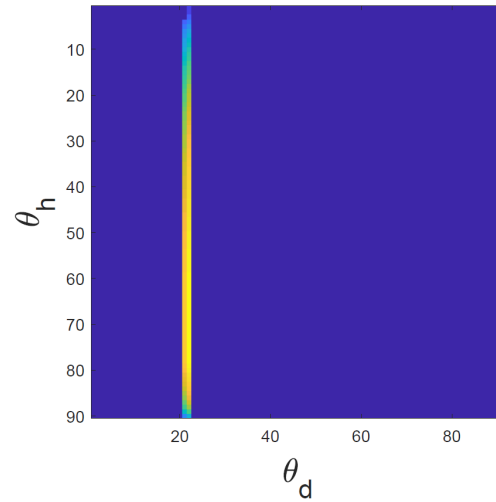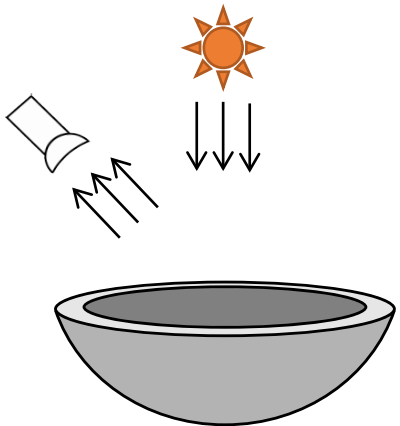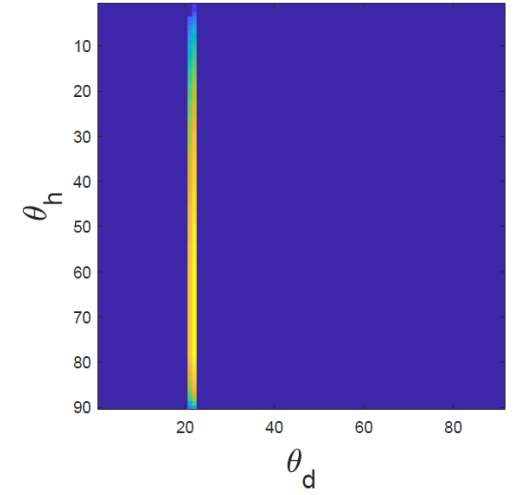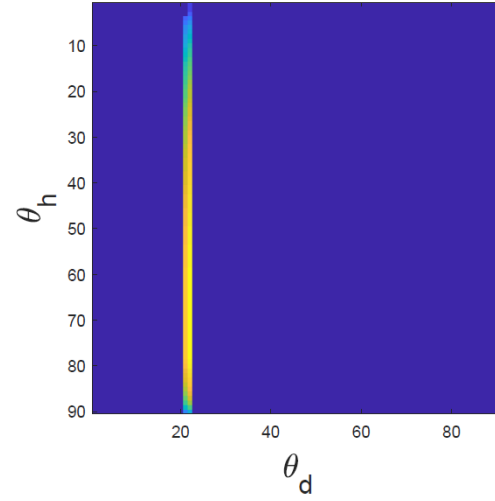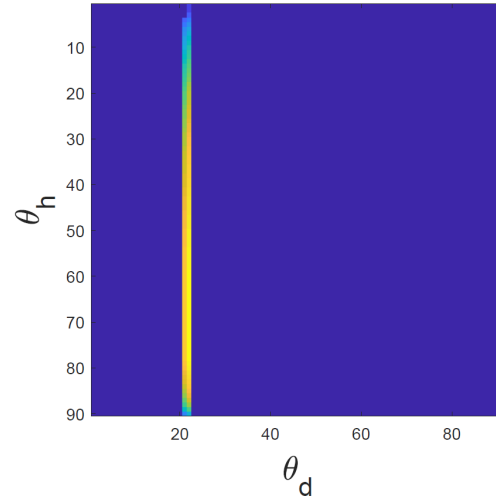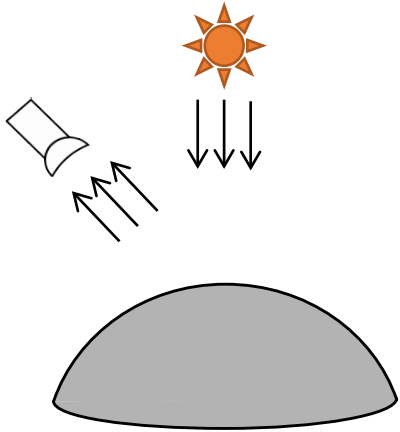


Single-bounce paths

Two-bounce paths



All-bounce paths

Results on MERL dataset

Groundtruth




Optimize
d shape

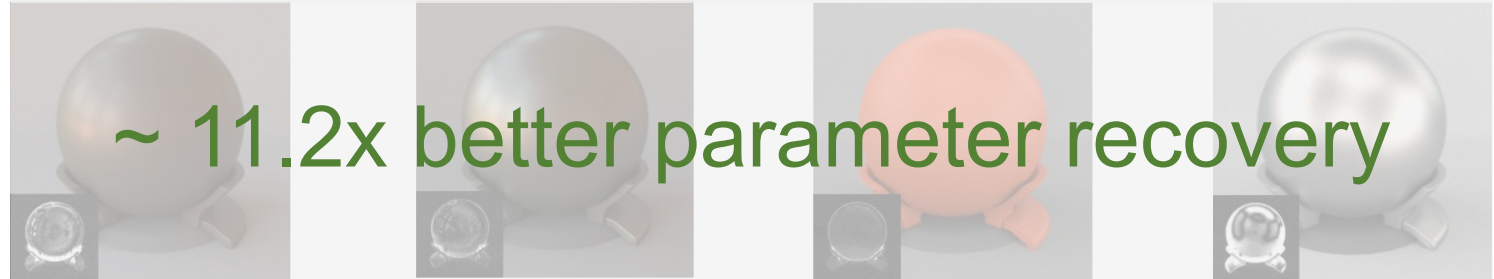

Global illumination can help...


- Reduce number of measurements required for inverse rendering

- We should rethink “optimal” acquisition systems




- Resolve ambiguities between different types of parameters

- We should revisit theory problems on uniqueness results

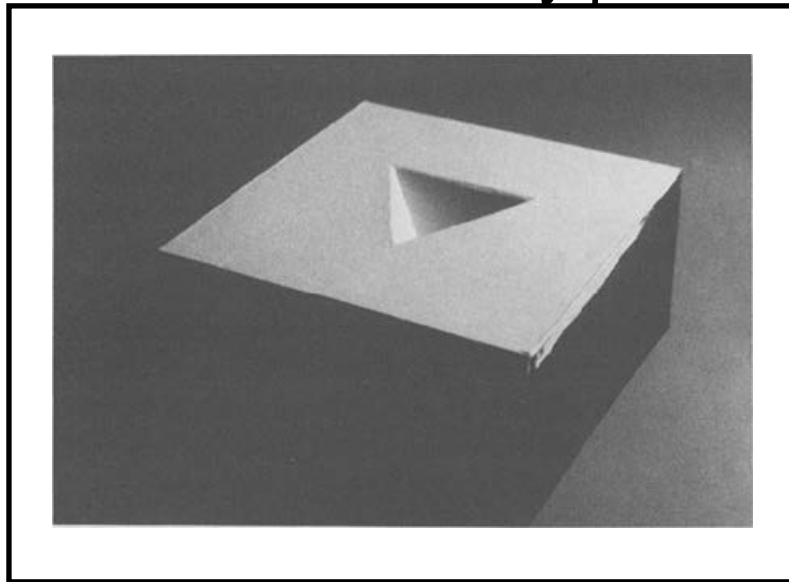


Shape from interreflections
[Nayar et al. 1990, Marr
Prize]

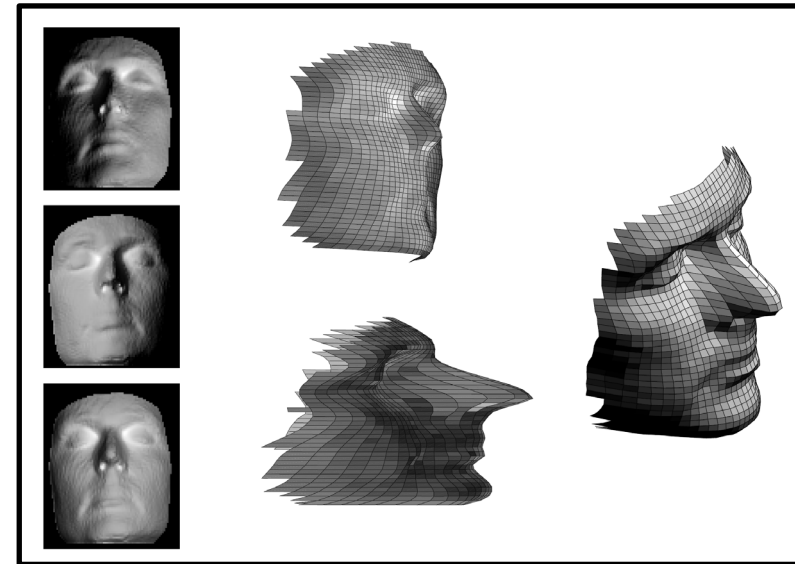

Interreflections resolve the GBR ambiguity
[Chandraker et al. 2005]

**What differentiable rendering does
not give us**

Inverse rendering (a.k.a. analysis by synthesis)

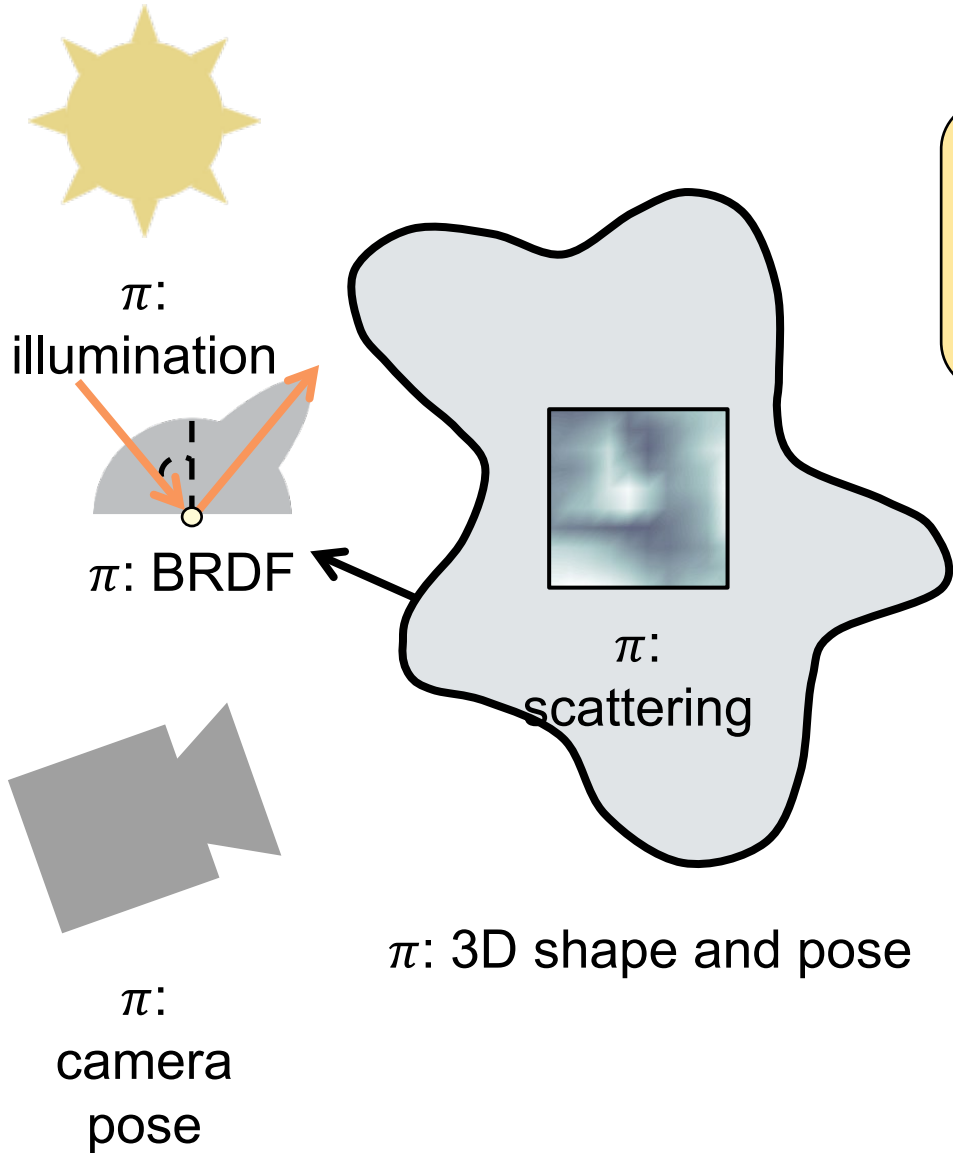

Analysis-by-synthesis optimization:

$$\min_{\text{scene unknowns } \pi} \text{loss} \left[\text{render} \left(\begin{array}{c} \text{scene} \\ \text{unknowns } \pi \end{array} \right) \right]$$

Stochastic gradient descent (e.g., Adam):


```
initialize  $\pi \leftarrow \pi_0$   
while (not converged)  
    update  $\pi \leftarrow \pi + \eta \cdot \frac{d\text{loss}(\pi)}{d\pi}$ 
```

Differentiable rendering


Why we need good initializations

- Analysis-by-synthesis objectives are highly non-convex, non-linear
 - Multiple *local* minima
- Ambiguities exist between different parameters
 - Multiple *global* minima

128

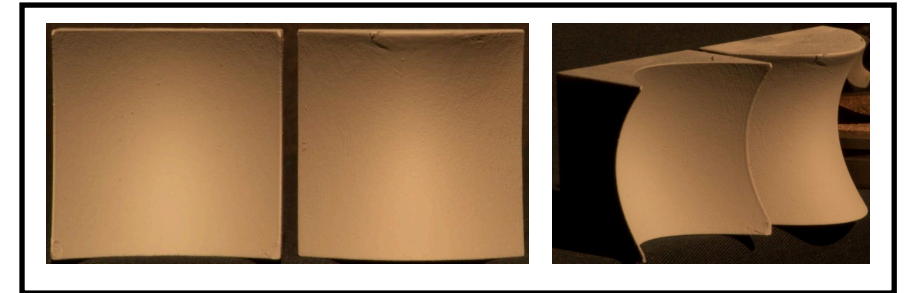

Ambiguities between shape and lighting
[Xiong et al. 2015]

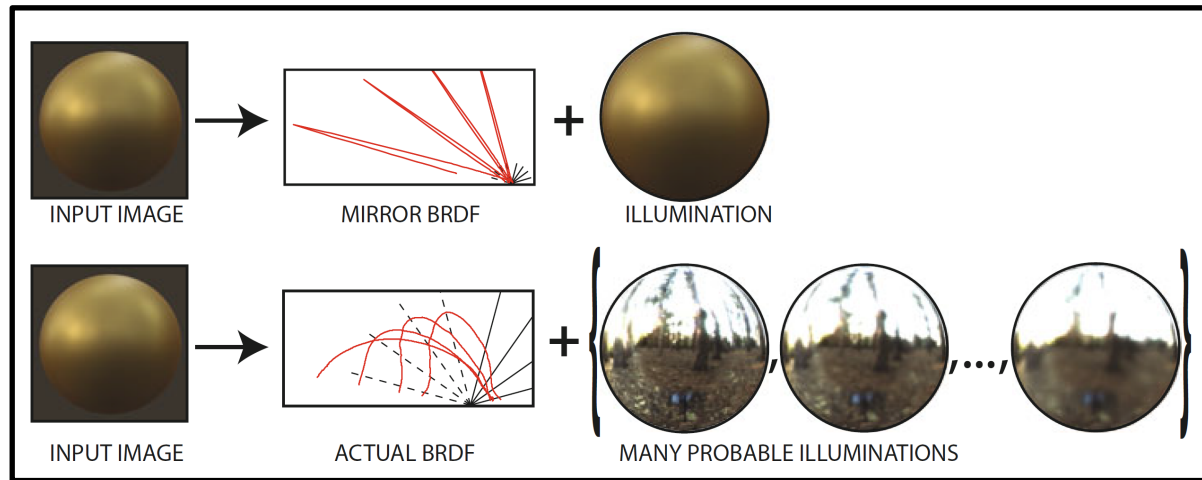

Ambiguities between BRDF and lighting
[Romeiro and Zickler 2010]





Ambiguities between scattering parameters
[Zhao et al. 2014]

Inverse rendering (a.k.a. analysis by synthesis)

Learned initializations help:

- avoid local minima
- accelerate convergence

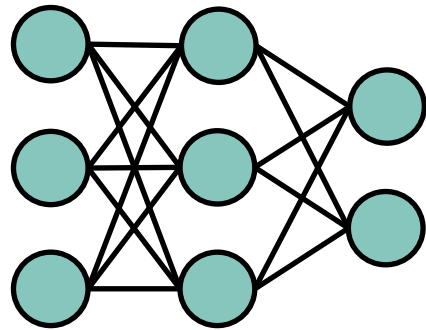

Neural network



Analysis-by-synthesis optimization:

$$\min_{\text{scene unknowns } \pi} \text{loss} \left[\text{render} \left(\begin{array}{c} \text{scene} \\ \text{unknowns } \pi \end{array} \right) \right]$$

Stochastic gradient descent (e.g., Adam):

```
initialize  $\pi \leftarrow \pi_0$ 
while (not converged)
  update  $\pi \leftarrow \pi + \eta \cdot \frac{d\text{loss}(\pi)}{d\pi}$ 
```


Differentiable rendering

$d\pi$

Why we need discriminative loss functions


- Well-designed loss functions can help reduce ambiguities
- Perceptual losses can help emphasize design aspects that matter
- Differentiable rendering can be combined with any loss function that can be backpropagated through

130

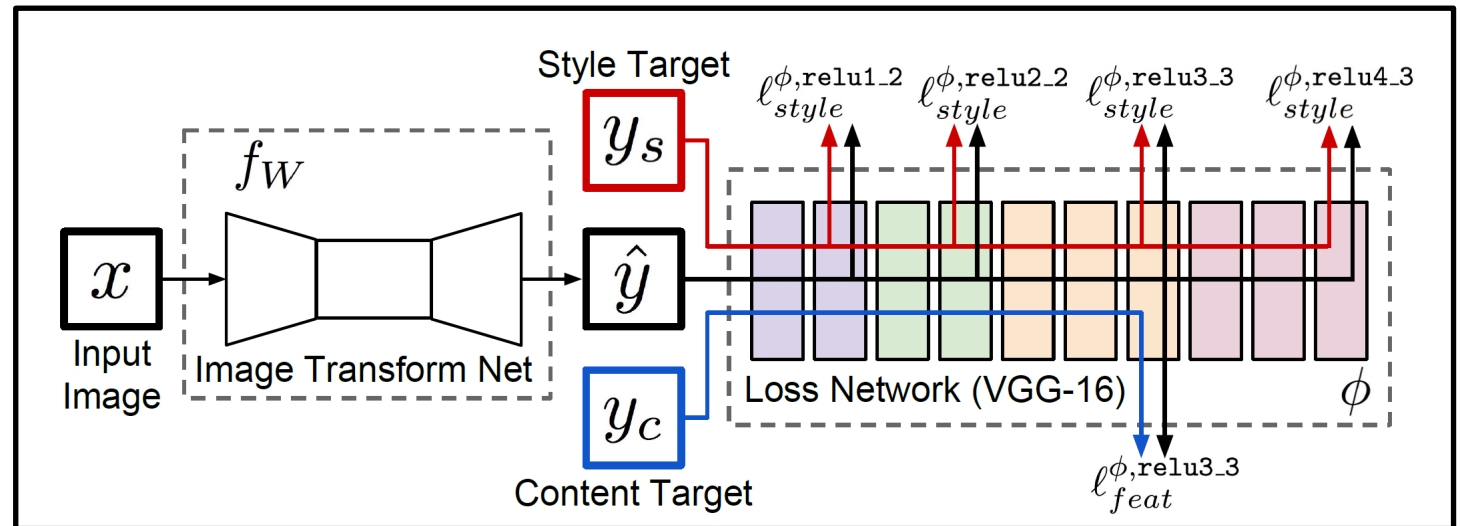

VGG-based *perceptual loss* [Johnson et al. 2016]

Inverse rendering (a.k.a. analysis by synthesis)

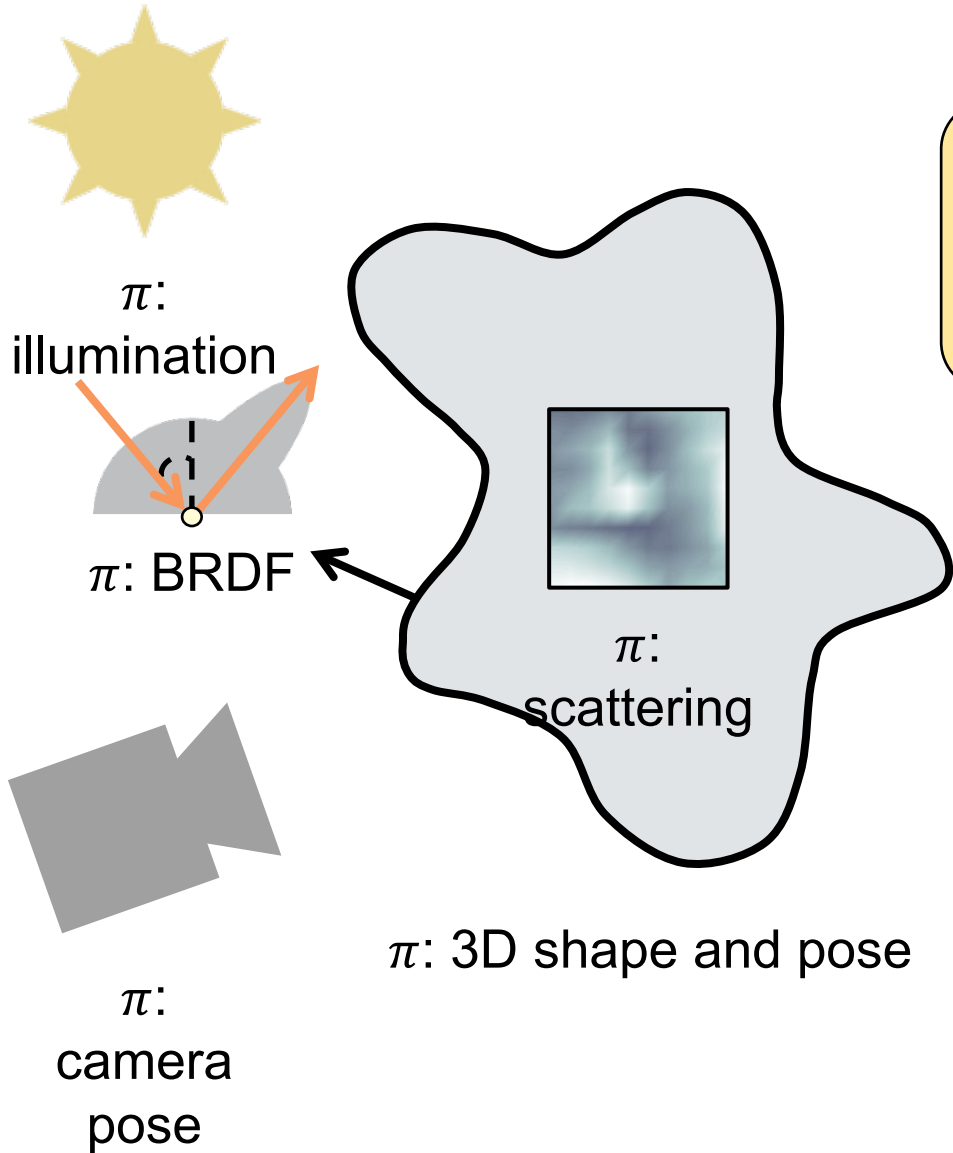

Analysis-by-synthesis optimization:

$$\min_{\text{scene unknowns } \pi} \text{loss} \left[\text{render} \left(\begin{array}{c} \text{scene} \\ \text{unknowns } \pi \end{array} \right) \right]$$


Stochastic gradient descent (e.g., Adam):

$$\begin{aligned} & \text{initialize } \pi \leftarrow \pi_0 \\ & \text{while (not converged)} \\ & \quad \text{update } \pi \leftarrow \pi + \eta \cdot \frac{d\text{loss}(\pi)}{d\pi} \end{aligned}$$


Differentiable rendering

High signal-to-noise ratio is critical

- The extent to which we can improve upon an initialization strongly depends on the signal-to-noise ratio of our measurements
- We need reliable camera models (noise, aberrations, other non-idealities)

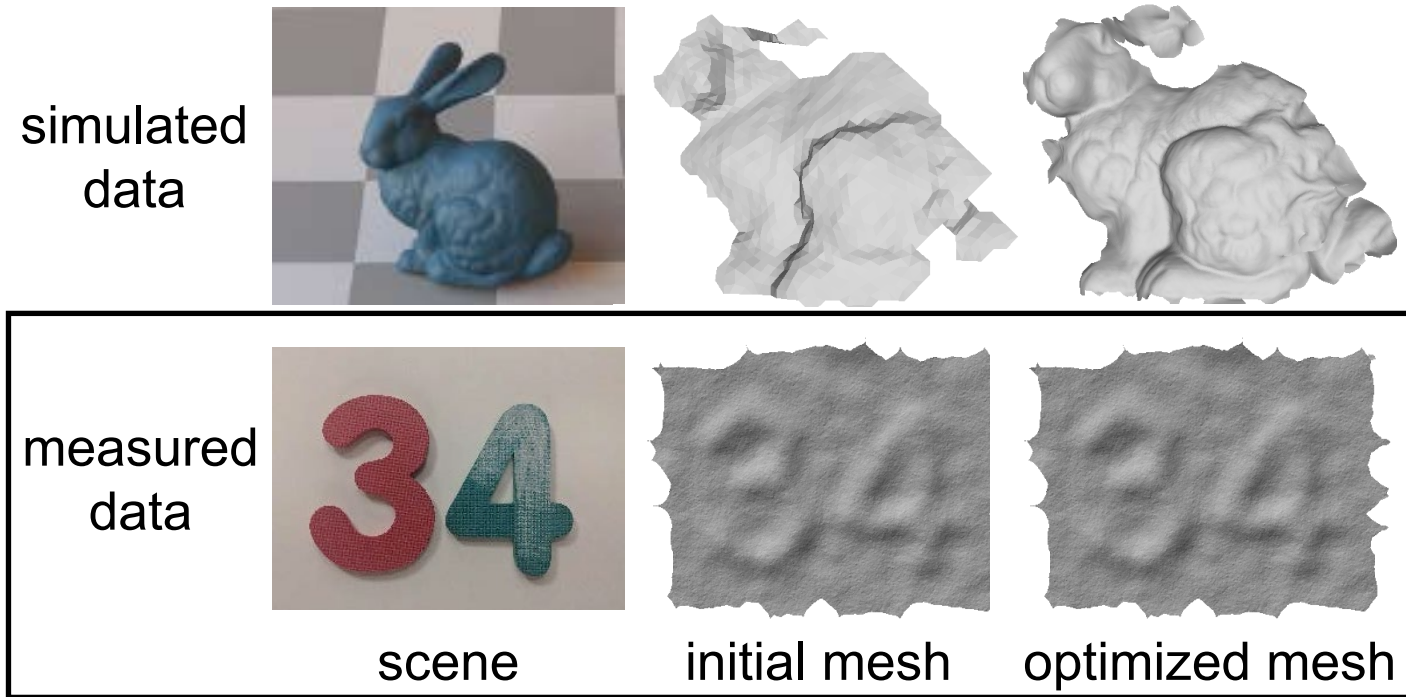

Non-line-of-sight imaging [Tsai et al. 2019]

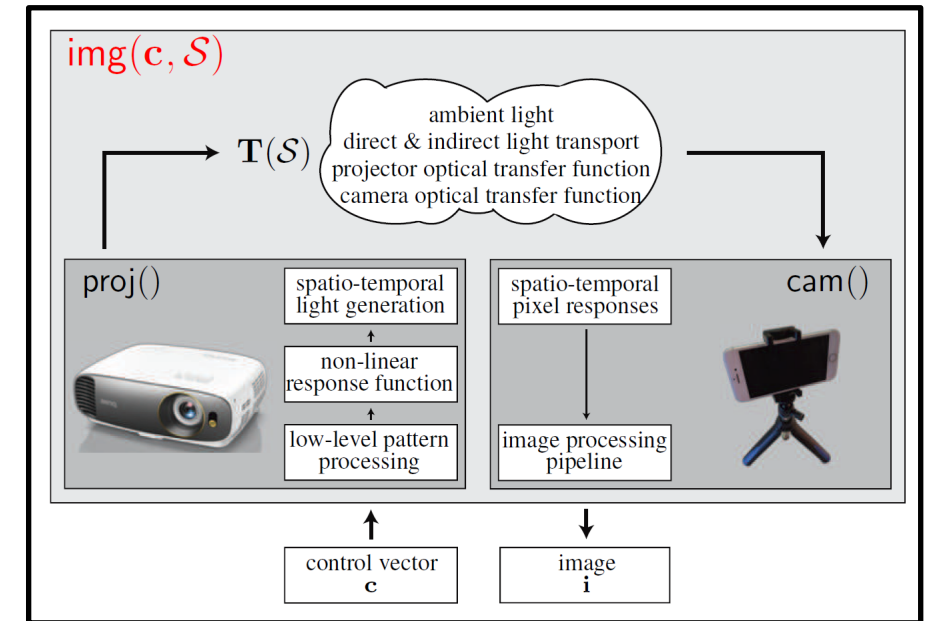

Optical gradient descent [Chen et al. 2020]

Stuff we are missing

We need path sampling algorithms tailored to differentiable rendering:

- Some simple versions exist for local differentiation (Gkioulekas et al. 2013, 2016).
- We need to take into account diff. geometric quantities in global case.
- We need to take into account loss function.

We need theory that can handle very low-dimensional path manifolds:

- We can't easily incorporate specular and refractive effects into arbitrary pipelines.
- Doable in isolation (Chen and Arvo 2000, Jakob and Marschner 2013, Xin et al. 2019).

Some more general thoughts

Initialization is super important:

- Approximate reconstruction assuming direct lighting is usually good enough.
- Coarse-to-fine schemes work well.

Parameterizations are super important:

- Loss functions very non-linear and change shape easily.
- Working with meshes is a pain (topology is awful and not (easily?) differentiable).

You don't always need Monte Carlo differentiable rendering:

- If you don't have strong global illumination, just use direct lighting.
- A lot of research in computer vision on differentiable rasterizers.

Remember that you are doing optimization:

- Unbiased and consistent gradients are very expensive to compute.
- Biased and/or inconsistent gradients can be very cheap to compute.
- Often, biased and/or inconsistent gradients are enough for convergence.
- Stochastic gradient descent matters a lot.


Reference material

Physics-Based Differentiable Rendering A Comprehensive Introduction

Shuang Zhao¹, Wenzel Jakob², and Tzu-Mao Li³

¹University of California, Irvine ²EPFL ³MIT CSAIL

SIGGRAPH 2020 Course

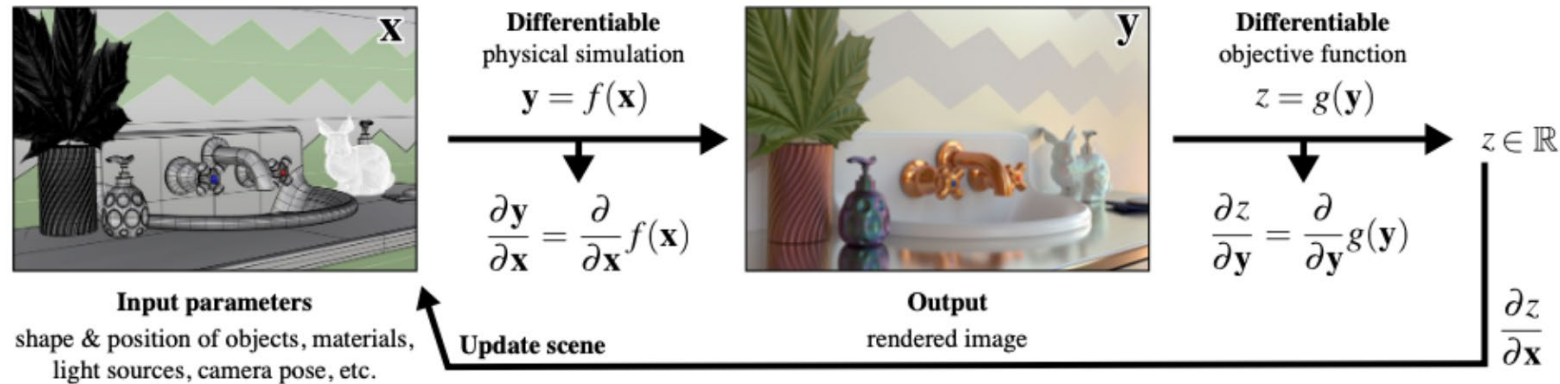

CVPR 2021 Tutorial Proposal

Title: Tutorial on Physics-Based Differentiable Rendering

Proposers' Names, Titles, Affiliations, and Primary Contact Emails:

Shuang Zhao
Assistant Professor, CS
University of California, Irvine
shz@ics.uci.edu

Ioannis Gkioulekas
Assistant Professor, RI
Carnegie Mellon University
igkioule@cs.cmu.edu